


Jan, 2019

Product Spec Sheet DIGITAL CONVERTER AE-4D

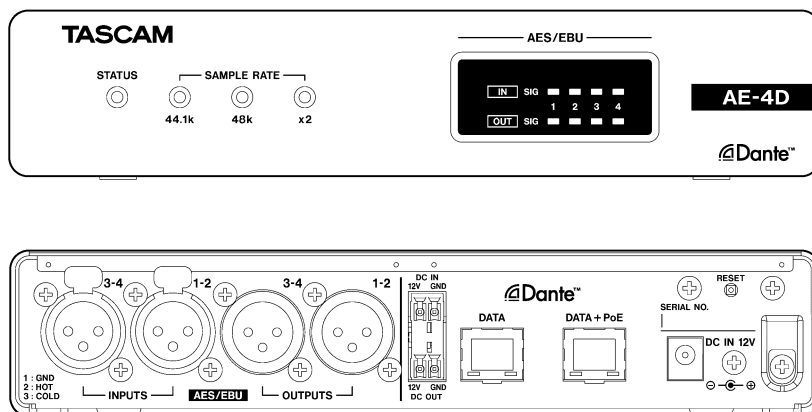

■ Specifications

General

•Formats and channels

- 44.1/48 kHz, 16/24-bit, 4 channels
- 88.2/96 kHz, 16/24-bit, 2 channels (double speed)

Input/output ratings

•DATA/DATA+PoE connectors

- Connector: RJ-45
- Transmission protocol: Dante
- Gigabit Ethernet standard: 1000BASE-T (IEEE 802.3ab)
- Cables: category 5e or faster STP cables

•DIGITAL INPUT (AES/EBU) connectors

- Connector: XLR-3-31
- Input impedance: 110 Ω
- Format: AES3-2003/IEC60958-4 (AES/EBU)
- Supported sampling frequencies: 32 kHz – 192 kHz (Sampling rate converter is always on)

•DIGITAL OUTPUT (AES/EBU) connectors

- Connector: XLR-3-32
- Input impedance: 110 Ω
- Format: AES3-2003/IEC60958-4 (AES/EBU)
- Supported sampling frequencies: 44.1, 48, 88.2 and 96 kHz

Other

•Power

- PoE class 0
- TASCAM PS-P1220E AC adapter (sold separately)

•Power consumption

- 3 W

•Dimensions

- 214 × 44.45 × 136.1 mm (W x H x D, including protrusions)

•Weight


795 g

•Operating temperature range


0°C – 40°C

■ Dimensional drawings

•Main unit

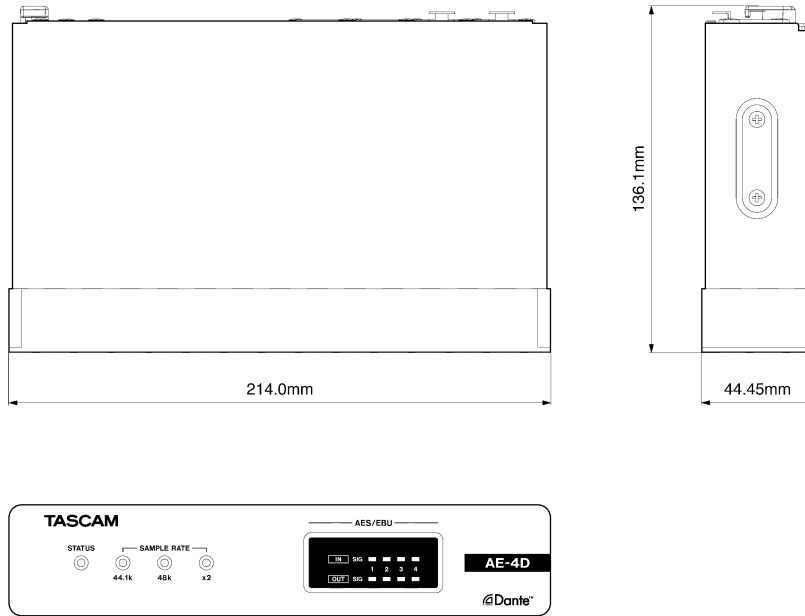

•Main unit with brackets installed

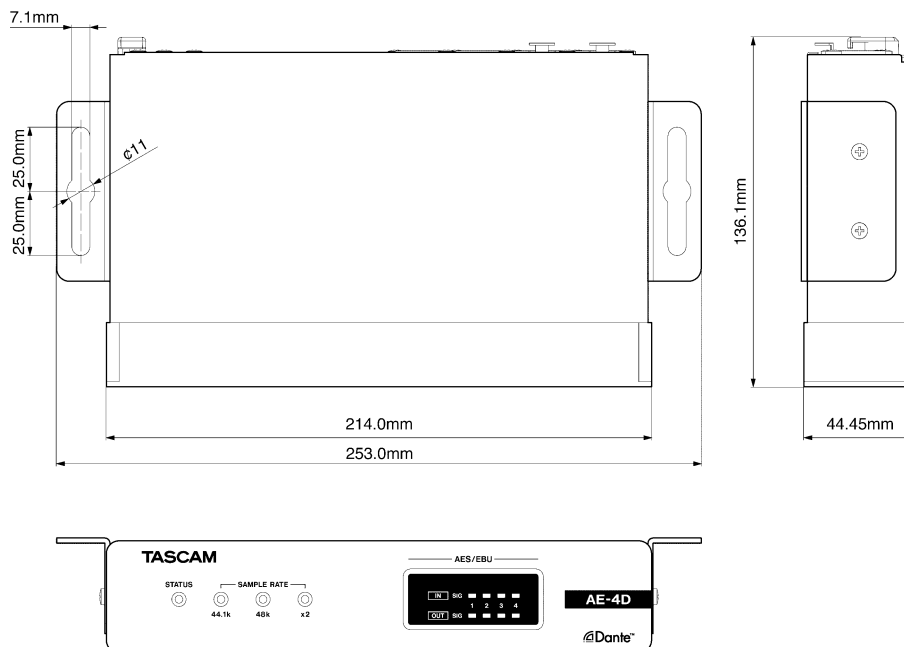

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.

※Other company names, product names and logos are the trademarks or registered trademarks of their owners.

※Specifications and appearance are subject to change without notice.

※All information included in this document is as of Jan, 2019.