

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Description:

The TX90 two channel IR transmitter combines modulator and emitter technology into a single operating unit, which reduces operating cost and eliminates precious rack space. The TX90 transmitter produces a wide-angle infrared signal that concentrates the IR energy efficiently in the listening area. Operating on the 2.3-3.8 MHz bandwidth, the TX90 is less susceptible to radio and lighting interference. Each TX90 transmitter can cover up to 28,000 sq ft (2,600 sq m) in single-channel operation. The coverage area can be easily increased by connecting additional TX90 emitters. A wall/ceiling omnidirectional mount is included, and stand kits are available for portable operation.


## Applications:

*Cinemas • Simultaneous Interpretation • Audio Description • Conferences • Multi-Media Rooms  
Boardrooms • Courtrooms • Schools • Universities • Churches*

## WIR TX90 Transmitter

<b>Dimensions, Weight:</b>	11.25" W x 6.25" H x 2.125" D (28.6 cm x 15.9 cm x 5.4 cm), 1.8 lbs (0.8 kg)
<b>Color:</b>	Black with white legends, black acrylic lens
<b>Power Supply:</b>	Wall Transformer, 24 VAC, 50-60 Hz, 35 VA, 3-pin MOLEX Connector North America: TFP 010, UL/CSA Europe: TFP 027-01, 2-pin Schuko plug, CE UK: TFP 027-02, 3-pin UK plug, CE
<b>Power Cable:</b>	NEC Class 2 wiring, two-conductor, 18 ga., 200' (61m) max. length
<b>Modulation:</b>	FM Wideband, ±50kHz deviation max., 50uS pre-emphasis
<b>Carrier Frequency:</b>	Channel A: Selectable, 2.3/2.8 MHz, Channel B: Selectable, 3.3/3.8 MHz
<b>Emitter IR Power:</b>	3.5 watts
<b>Coverage Area:</b>	28,000 ft <sup>2</sup> (2,600 m <sup>2</sup> ) in single-channel mode when using the RX12-4 Receiver 18,000 ft <sup>2</sup> (1,670 m <sup>2</sup> ) in four-channel mode when using the RX12-4 Receiver 3,500 ft <sup>2</sup> (325 m <sup>2</sup> ) in single-channel mode when using the RX14-2 Receiver 3,063 ft <sup>2</sup> (285 m <sup>2</sup> ) in single-channel mode when using the RX16 Receiver (See coverage area diagrams)
<b>Signal-to-Noise Ratio:</b>	>75 dB, ±3dB
<b>Frequency Response:</b>	80 to 15,000 Hz, electrical response
<b>Total Harmonic Distortion:</b>	Less than .2%, electrical response at 1kHz
<b>Compression:</b>	Music preset 1:1, Voice preset 1.5:1, Hearing Assist preset 2:1
<b>Auto Carrier Shut-Off:</b>	20 minute timer shuts off carrier when no audio is present

Fig. 1: TX90 Bottom View

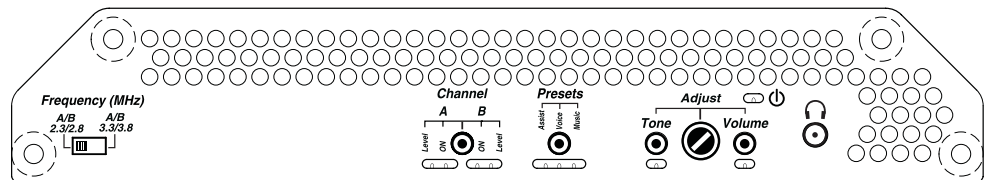


<b>Power Indicator:</b>	Red LED
<b>Audio Volume Level Controls:</b>	CHA and CHB Input Level, press to select, 28 dB adjustable range
<b>Audio Indicators:</b>	CHA and CHB Audio Level, yellow LED, flash
<b>Carrier LEDs:</b>	2 green LED carrier "on" indicators
<b>Phones Output:</b>	3.5mm TRS headphone jack. CH A tip, CH B ring on jack, 32 ohm headphone (min)
<b>Application Preset:</b>	Music, Voice, Hearing Assist. Frequency response; Music: Flat; Voice: Mid-range boost; Hearing Assist: High frequency boost
<b>Tone Control:</b>	Press to select, 21 dB adjustable range (1 kHz between low boost/hi-cut and low cut/hi boost).

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

Fig. 2: TX90 Rear View

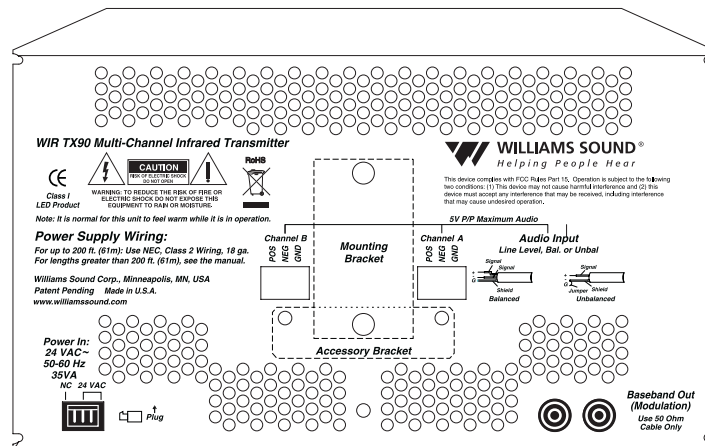


<b>Power Input:</b>	3-Pin Molex, 24 VAC, 50-60 Hz, 35 VA
<b>Audio Input Connector:</b>	CHA and CHB, 3 wire Phoenix
<b>Input Level:</b>	Balanced or unbalanced, 316 mVRMS (-10dBV) nominal, 5.7k input impedance; max input (over volume range) -21 to +7 dBV.
<b>Baseband Output:</b>	BNC, 50 Ω, for use with TX9 only
<b>Baseband Cable:</b>	RG 58 Coax, BNC connectors, maximum 1000' (300m) length
<b>Operating Requirements:</b>	0-50° C (+32°F to 122°F) ambient temperature, non-condensing, non-corrosive atmosphere
<b>Mounting Kits:</b>	Wall or Ceiling Mount: BKT 024 Omnidirectional mount; Optional: Mic Stand Kit: SS-10; or Tripod Stands: SS-11 or SS-6
<b>Warranty:</b>	5 years on transmitter, 90 days on accessories
<b>Approvals:</b>	CE, FCC, RoHS, WEEE
<b>Compatible Receivers:</b>	WIR RX12-4 Four-Channel Receiver, WIR RX22-4 Four-Channel Receiver, WIR RX14-2 Two-Channel Receiver, WIR RX16 Two-Channel Receiver
<b>Notes:</b>	Specifications: Single end input, volume & tone controls at mid point, 1 kHz, "Music" Preset

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Coverage Patterns:

Fig. 3: Receiver Coverage Area with TX90 Transmitter in Single Channel Mode

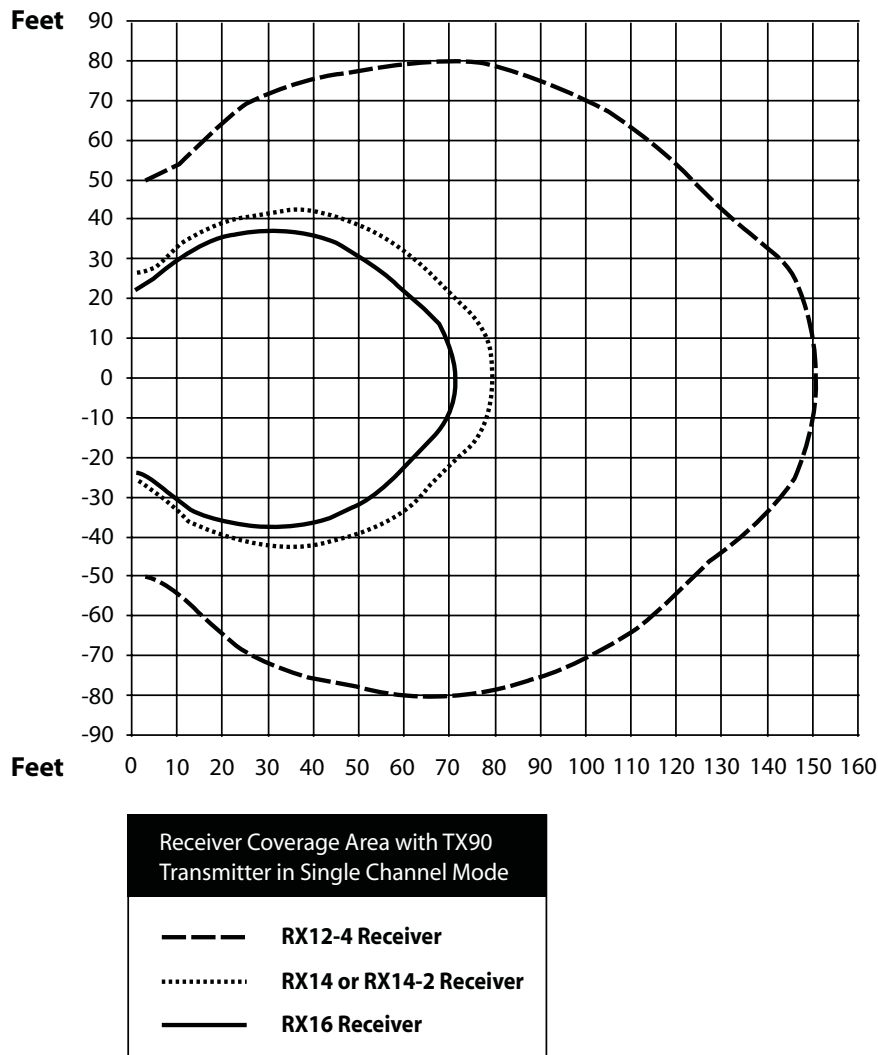

The coverage area for the TX90 will vary depending on the receiver being used. The diagram above demonstrates the receiver coverage when operating a single TX90 transmitter in single channel mode. Patterns are direct radiation patterns.


Note: Reflections of the infrared light from walls, ceilings and floors may change these patterns.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

©2006, Williams Sound Corp. MCAT 042B

# Sound Plus™ Infrared Transmitter, Model WIR TX90

**Fig. 4: 3-Dimension Foot Pattern**

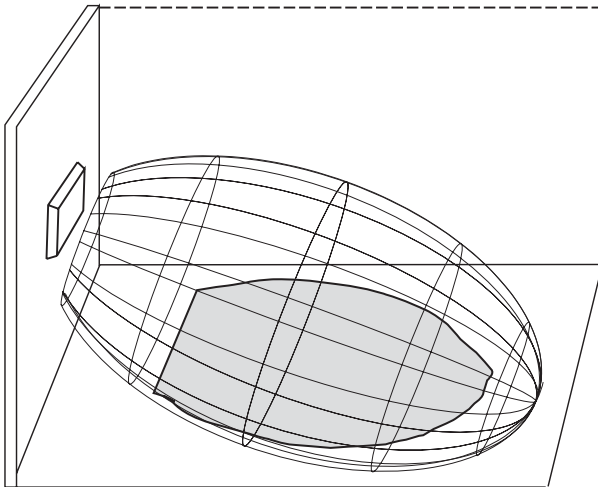

The TX90 floods the listening audience with a cone shape light pattern as shown here.

The path of the cone shape light leaves a pattern on the ground, or "foot print," and indicates where the strongest receiver reception will occur.


The actual coverage area will vary depending on the sensitivity of the receiver being used. Refer to Figures 3 and 6 to determine how many emitters are required for 100% coverage of the listening area.

To determine the best location for the transmitter, it helps to think of the IR transmitter as an invisible floodlight. You'll want to aim it so the listeners are "flooded" with the infrared light. The transmitter should also be positioned high enough so it won't be blocked by people and other physical obstructions. See Figure 5 below. **Mount the transmitter at least 2 ft. (.61 m) above the audience.** Position the transmitter to face in a slightly downward angle, 20°, that will increase the "throw" of the infrared beam.

**Fig. 5: Vertical Beam Spread**

**Minimum Receiver Range When Operating with a TX90 Transmitter in Single Channel Mode**

 RX12-4 Receiver: 150' (45 m)    
  RX14-2: 80' (24 m)    
  RX16: 70' (21 m)

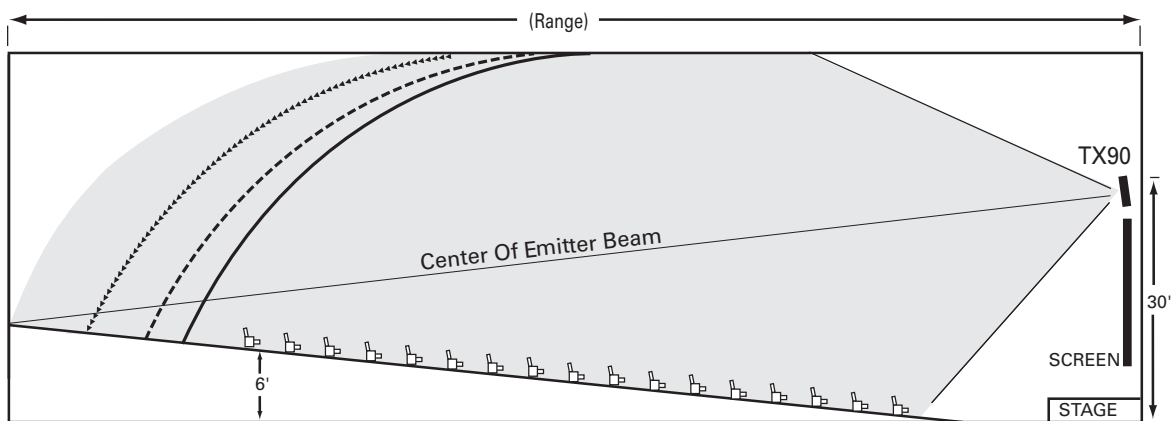


NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Maximum Range When Using the RX12-4 Infrared Receiver

Fig. 6: Horizontal and Vertical Radiation Polar Plots

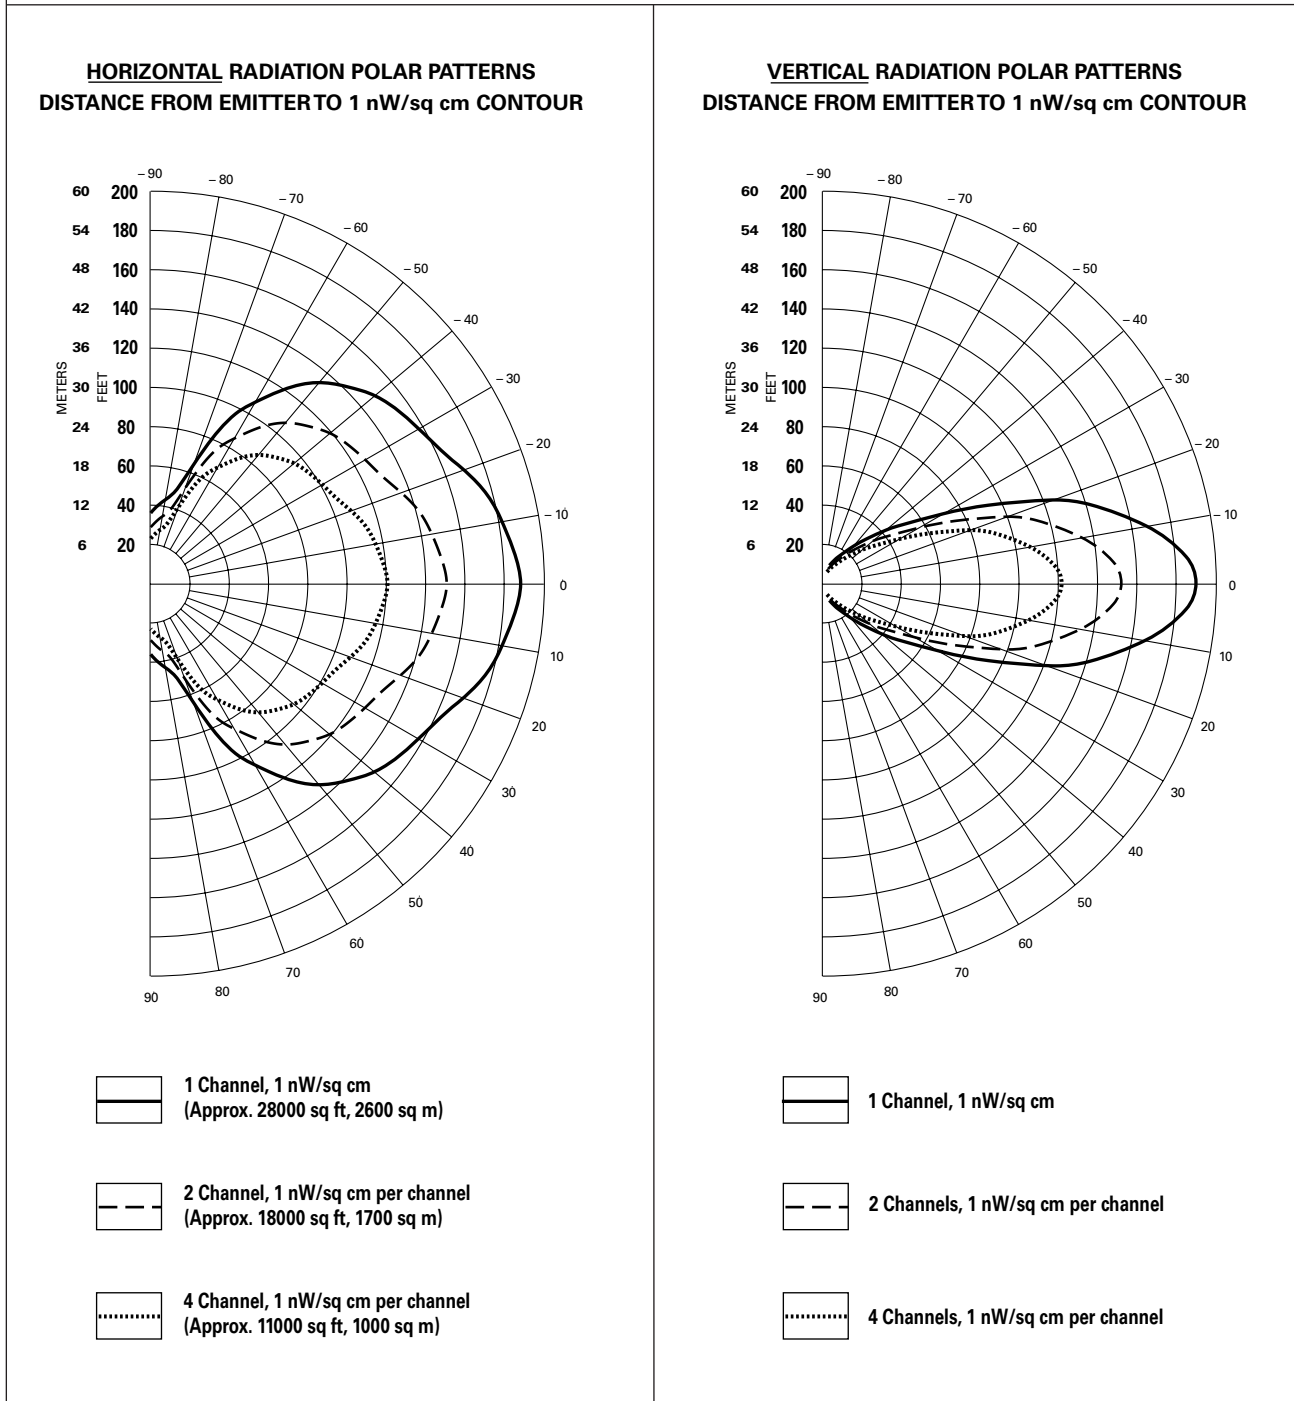

Reflections of the infrared light from walls, ceilings, and floors may change these patterns.

**Important: Remember to point the transmitter towards the listening audience!**

If you're not getting sufficient coverage with a single, properly installed TX90 Transmitter, you may need to add additional WIR TX90 Emitters to achieve full coverage of your listening area. Figures 7a and 7b illustrate how multiple emitters can be used for large room installations.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Multiple Emitters Installed to Maximize Coverage

**Fig. 7a: Overlapping Illumination Patterns to Cover Larger Listening Areas**


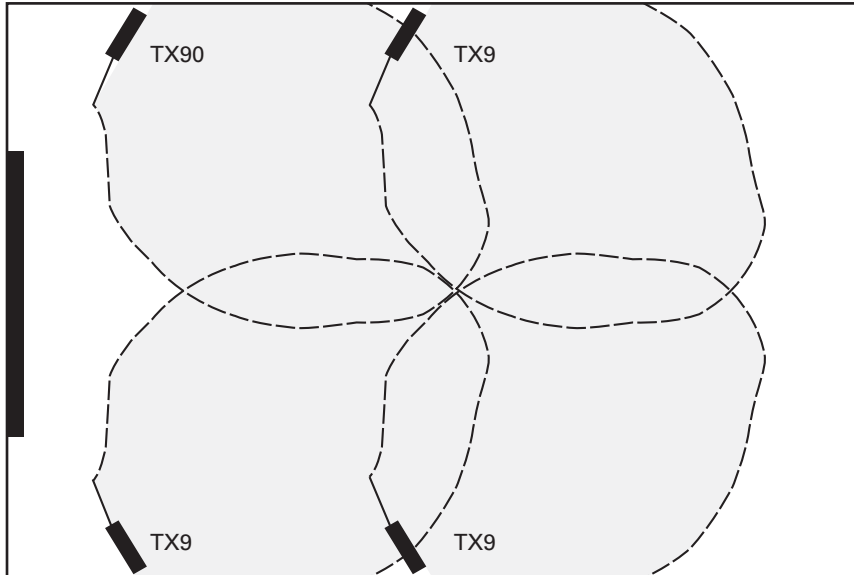


Fig. 7a above is a typical example of how multiple emitters are used to cover larger listening areas. Generally it is desirable for the illumination patterns to overlap. Note: The coverage area will vary depending on the infrared receiver being used; refer to Figures 3 and 6 to determine how many additional emitters are required to achieve full coverage of a listening area.

**Fig. 7b: Overlapping Illumination Patterns to Cover Larger Listening Areas**

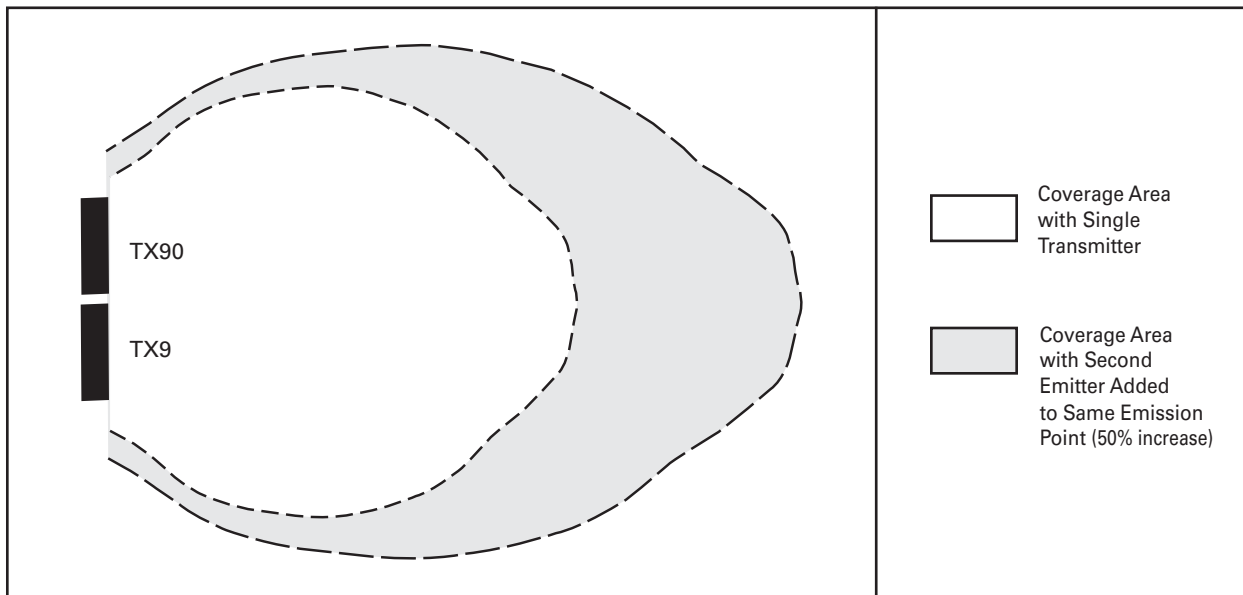


When a TX90 transmitter and TX9 emitter are used at the same emission point in *single channel mode*, the overall coverage area increases 50%. When using an RX12-4 receiver, as a result, the coverage area will increase to an estimated 42,000 ft<sup>2</sup> (3,902 m<sup>2</sup>); the RX14-2 will increase to 5,250 ft<sup>2</sup> (488 m<sup>2</sup>); the RX16 will increase to 4,590 ft<sup>2</sup> (426 m<sup>2</sup>).

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!


# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Optional WIR RX12-4 Receiver:

<b>Receiver Style:</b>	Body-Pack, dual-lens detector, lanyard
<b>Size:</b>	3-5/8" L x 2-3/8" W x 7/8" H (9.2 cm x 6 cm x 2.2 cm)
<b>Weight:</b>	4.5 oz (127 g) with batteries
<b>Color and Material:</b>	Gray, shatter-proof polypropylene
<b>Lanyard:</b>	3 ft (.91 m), allows receiver to be worn around the neck
<b>Operating Temperature:</b>	-10° C to +50° C
<b>Battery Type:</b>	2 x AA, alkaline (BAT 001) or NiMH (BAT 026)
<b>Battery Life:</b>	Alkaline: 60 hours, NiMH: 30 hours/charge
<b>Battery Drain:</b>	25 mA, nominal
<b>Charging Contacts:</b>	For use only with CHG 200 and CHG 1600 Chargers
<b>Carrier Frequency:</b>	Channel 1: 2.3 MHz, Channel 2: 2.8 MHz Channel 3: 3.3 MHz, Channel 4: 3.8 MHz
<b>De-Emphasis:</b>	50 uS
<b>FM Deviation:</b>	±50 kHz
<b>Signal-to-Noise Ratio:</b>	60dB min.
<b>Squelch:</b>	Receiver squelches (mutes) at 40 dB S/N ratio
<b>Frequency Response:</b>	25 Hz to 16 KHz, +1 dB, -3 dB, electrical response
<b>Total Harmonic Distortion:</b>	Less than 1%, electrical response
<b>Controls:</b>	ON/OFF/VOLUME: combination thumbwheel knob Channel Selector: four-position rotary switch
<b>Indicators:</b>	Red LED "ON" indicator, flashes to indicate Low battery
<b>Audio Output Jacks:</b>	3.5 mm stereo mini phone jack Accepts 3.5 mm mono or stereo phone plug
<b>Audio Output Power:</b>	15 mW max at 32 Ω
<b>Acoustic Output:</b>	125 dB SSPL90 with HED 002; 110 dB SSPL90 w/ EAR 013
<b>Sensitivity:</b>	Better than 1 nW/cm <sup>2</sup> for 40 dB signal-to-noise ratio
<b>Approvals:</b>	CE, FCC, WEEE
<b>Warranty:</b>	5 years on receiver, 90 days on accessories
<b>Compatible Headphones/Earphones:</b>	Mono or stereo, 8-32 ohms, 3.5 mm mini phone plug, HED 021, HED 026, EAR 013, EAR 014, EAR 022



**RX12-4 Top View**

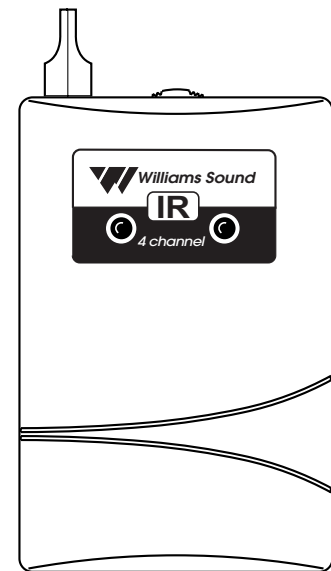


**RX12-4 Front View**

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Optional WIR RX14-2 Receiver:

<b>Receiver Style:</b>	Headset
<b>Earpad Size:</b>	2.5" (6.5 cm) diameter, adjustable headband
<b>Weight:</b>	6.7 oz (191 g) without batteries
<b>Color and Material:</b>	Black, plastic
<b>Operating Range:</b>	Up to 3,500 ft <sup>2</sup> (325 m <sup>2</sup> ) when using a single WIR TX90 Transmitter
<b>Battery Type:</b>	AAA Alkaline batteries (BAT 010). AAA NiMH (BAT 022) optional
<b>Battery Life:</b>	Alkaline: 50 hours, NiMH: 8 hours/charge
<b>Battery Drain:</b>	25 mA, nominal
<b>Controls:</b>	ON/OFF switch (2) Thumbwheel volume control knob, left and right (1) Frequency push-button selector, 2.3 MHz or 2.8 MHz
<b>Acoustic Output:</b>	118 dB MAX SSPL90, +/- dB with 6 cc coupler
<b>Warranty:</b>	1-year warranty (excludes physical damage)
<b>Approvals:</b>	CE, RoHS

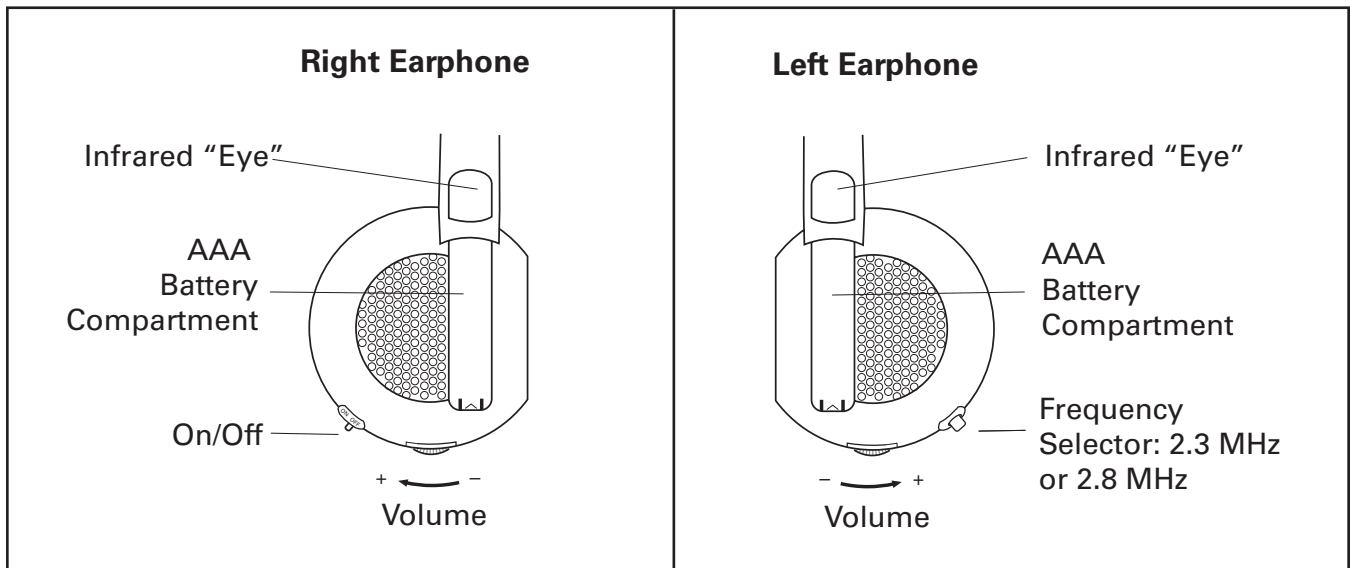

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Bid Specs:

### WIR TX90 Transmitter

The Williams Sound Corp. WIR TX90 transmitter shall consist of an all-in-one modulator and emitter operating on switchable carrier frequencies of 2.3/2.8 MHz or 3.3/3.8 MHz. The carrier frequency shall use 50 kHz deviation and 50µs pre-emphasis.

The transmitter shall have a range of 28,000 ft<sup>2</sup> (2,600 m<sup>2</sup>) in single channel mode when using the RX12-4 receiver. The transmitter shall be contained in a metal housing with a durable plastic lens. The transmitter shall be convection cooled without fans. The transmitter shall include an omni-directional mounting bracket for permanent installations. Additional brackets shall be available for different mounting options.

The transmitter shall provide two channels of selectable carrier frequencies: CH A 2.3/2.8 MHz or CH B 3.3/3.8 MHz. Two transmitters used in tandem shall provide up to 4 simultaneous channels.

The transmitter shall have two Phoenix connectors on the back for balanced or unbalanced line input. All controls and indicators shall be accessible on the bottom of the panel of the transmitter.

The transmitter shall have three application presets: Music, Hearing Assistance and Voice accessible by thumb-screw adjuster.

There shall be a 3.5mm stereo headphone jack for monitoring the processed audio before being transmitted.

Two BNC (50Ω) baseband output jacks shall be provided on the back panel for more coverage needs. The TX9 emitter panels must be used with the TX90 transmitter via RG58 coax cable.

The transmitter shall be powered by an external 24VAC, 50-60 Hz, 35VA power supply. The power connector shall be a three pin Molex type. Additional emitters shall require individual external power supplies.

The transmitter shall be covered by a five-year warranty on parts and labor. The transmitter shall be the Williams Sound Corp. model WIR TX90.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Sound Plus™ Infrared Transmitter, Model WIR TX90

## Contact:

### United States

Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344  
Ph: 800-843-3544 / 952-943-2252  
FAX: 952-943-2174  
Web: [www.williamssound.com](http://www.williamssound.com)  
Email: [info@williamssound.com](mailto:info@williamssound.com)

### Canada

Thorvin Electronics  
2861 Sherwood Heights Dr. Units 36-37  
Oakville, ON L6J-7K1 Canada  
Ph: 800-323-6634 / 905-829-3040  
FAX: 905-829-4196  
Web: [www.thorvinelectronics.com](http://www.thorvinelectronics.com)

### South America

DPTech  
SIA Trecho 3/4 Lote 335 2°. Andar  
71200-030 Brasília, DF  
BRAZIL  
Ph: (5561) 361-1384  
Fax: (5561) 361-0948  
Web: [www.dpotech.com.br](http://www.dpotech.com.br)  
Email: [ws@dpotech.com.br](mailto:ws@dpotech.com.br)

### United Kingdom

Sound Associates  
Keeble House, 81 Island Farm Road  
West Molesey, Surrey KT 2SA  
United Kingdom  
Ph: (44) 020 8939 5900  
Fax: (44) 020 8939 5901  
Web: [www.soundassociates.co.uk](http://www.soundassociates.co.uk)  
Email: [jmurdoch@soundassociates.com](mailto:jmurdoch@soundassociates.com)

### Asia, Europe, Latin America, Mexico

International Sales Department  
Williams Sound Corp.  
10321 W. 70th Street  
Eden Prairie, MN 55344 USA  
Phone: +1 952 224 7791 or +1 651 493 2578  
Fax: +1 952 943 2174  
Email: [info@williamssound.com](mailto:info@williamssound.com)  
Web: [www.williamssound.com](http://www.williamssound.com)

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!