



Middle Atlantic Products

middleatlantic.com

# SFR Series Swing Frame Wall Racks



EIA/TIA Compliant


The SFR Series open swing frame wall rack provides easy and economical rear equipment access

## Features

- Open wall mount design allows equipment to swing out, greatly simplifying wiring tasks
- Innovative 90° "positive stop" design facilitates punching down while fully open
- 18" useable equipment depth
- 100 lb. weight capacity
- Durable black powder coat finish



(open position)

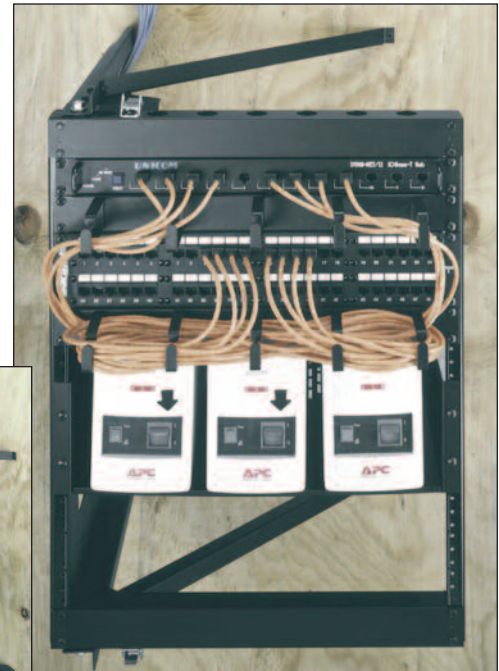SFR-20-18  
(closed position)

## Architects' and Engineers' Specifications


EIA compliant 19" wall-mount swing gate rack shall be Middle Atlantic Products model number SFR-\_\_-\_\_ (refer to chart). Overall height shall be \_\_\_\_\_" (refer to chart), useable rack height shall be \_\_\_\_\_" (refer to chart), maximum depth shall be \_\_\_\_\_" (refer to drawing), useable depth shall be \_\_\_\_\_" (refer to drawing). Weight capacity shall be 100 lbs. SFR shall be constructed of the following materials: backpan shall be 14-gauge steel with durable black powder coat finish, rackrail shall be 11-gauge steel rackrail with tapped 10-32 mounting holes in universal EIA spacing with black e-coat finish and marked rackspace. SFR shall be RoHS EU Directive 2002/95/EC compliant. SFR shall be warranted to be free from defects in material and workmanship under normal use and conditions for the lifetime of the rack.

customizable specification clips available at [middleatlantic.com](http://middleatlantic.com)




## Exceptional Support & Protection Products™

# SFR Series Basic Dimensions

REAR VIEW

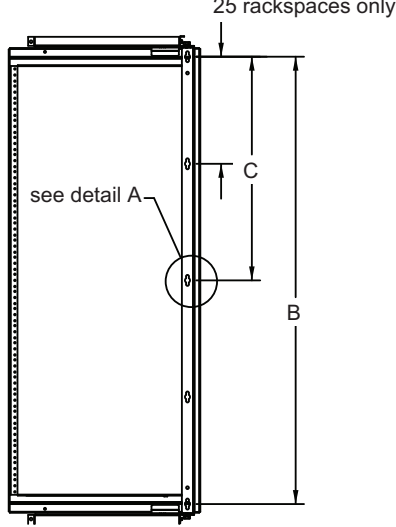


FRONT VIEW

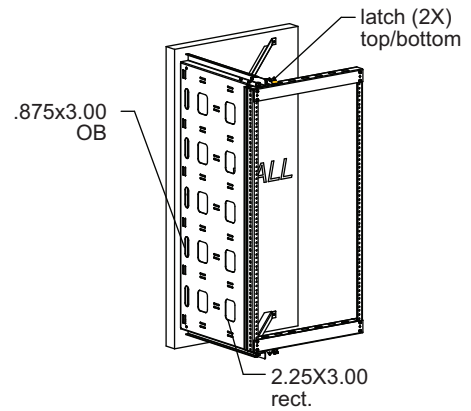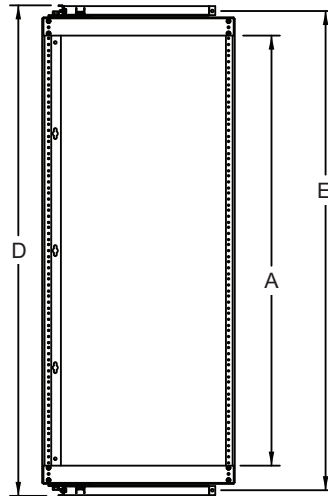


All dimensions in inches unless otherwise noted [All dimensions in brackets are in millimeters]

Part #	Useable Height A	Distance between top and bottom mounting holes B	Distance between top and middle mounting holes C	Overall Height D	Bracket Mounting Hole Distance E
SFR-12-18	21.06 [535]	23.00 [584]	11.50 [292]	27.22 [692]	26.07 [662]
SFR-20-18	35.06 [891]	37.00 [940]	18.50 [470]	41.22 [1047]	40.07 [1018]
SFR-25-18	43.81 [1113]	45.75 [1162]	22.88 [581]	49.97 [1269]	48.82 [1240]
SFR-12-24	21.06 [535]	23.00 [584]	11.50 [292]	27.22 [692]	26.07 [662]
SFR-20-24	35.06 [891]	37.00 [940]	18.50 [470]	41.22 [1047]	40.07 [1018]
SFR-25-24	43.81 [1113]	45.75 [1162]	22.88 [581]	49.97 [1269]	48.82 [1240]

45° OPEN POSITION

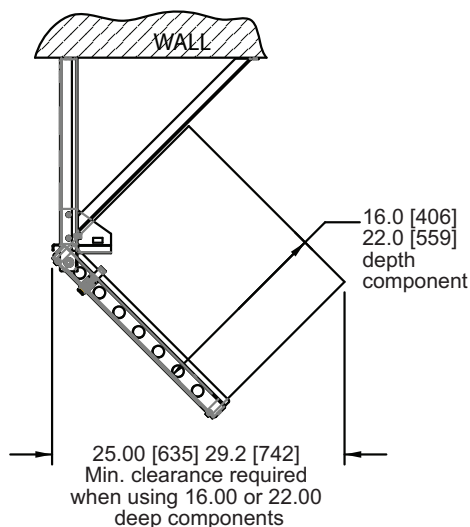

MAX. OPEN POSITION

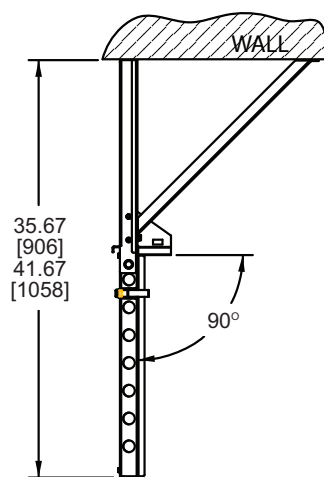

CLOSED POSITION

