

SUT632P

Universal Ultra Slim Tilt Wall Mount

For 22" to 40" Ultra-thin Flat Panel Screens*



The SUT632P Universal Ultra Slim Tilt Wall Mount is the industry's slimmest tilt wall mount that delivers an aesthetically-pleasing mounting solution with no sacrifice to functionality. Its innovative design and use of new technologies merge style with state-of-the-art continuous tilt technology and installer-friendly features. Complementing its versatility and functionality is a sleek, ultra-low profile design with a high gloss black finish that harmonizes the screen with the mount. The SUT632P provides the ultimate combination of looks and functionality in an ultra-thin package for the perfect, close-to-the-wall screen installation.



Screen size: 22"-40"



Max load: 60 lb (27 Kg)

FEATURES

- Holds screen 0.68" (17 mm) from the wall in the closed position
- VESA® 75, 100, 200 x 100 and 200 x 200 mm compliant
- Innovative tilt mechanism allows for easy setting of the tilt angle in just one motion
- Tilt range of +15°/-5° to position the screen at the ideal viewing angle
- Screen can be held off the wall up to 3.88" (98 mm) allowing for hands-free full access to the back of the screen
- Screen adapter simply hooks onto wall plate for quick and easy installation
- Lockdown tab prevents screen from unwanted bump-off or horizontal shifting
- Max load capacity of 60 lb (27 Kg)

IDEAL VIEWING POSITION

Full tilt motion provides the perfect viewing angle



EASY INSTALLATION

Simple hook-on design makes installation quick and easy

ULTRA SLIM DESIGN

The mount virtually disappears behind the screen

* Designed exclusively for use with ultra-thin screens 2" (51 mm) deep or less



Holds screen 0.68" (17 mm) from the wall



Full motion tilt allows for +15°/-5°



Screen extended up to 3.88" (98 mm) from the wall allowing for hands-free installation access to the back of the screen



UL US



RoHS

CLICK: www.peerlessmounts.com

CALL: 800.865.2112

FAX: 708.865.2941

peerless®

SUT632P:	Ultra Slim Wall Mount for 22" to 40" Ultra-thin Flat Panel Screens
----------	--

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SUT632P	8.75" x 9.35" x 0.68" (222 x 237 x 17 mm)	3.5 lb (1.6 Kg)	60 lb (27 Kg)	Scratch resistant fused epoxy	Gloss black



Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SUT632P	11.25" x 1.625" x 9.95" (286 x 41 x 253 mm)	4 lb (1.8 Kg)	735029264965	Mount and attachment hardware for screen and wall	1

Accessories

IBA1:	In-wall accessory box
-------	-----------------------

All dimensions = inch (mm)

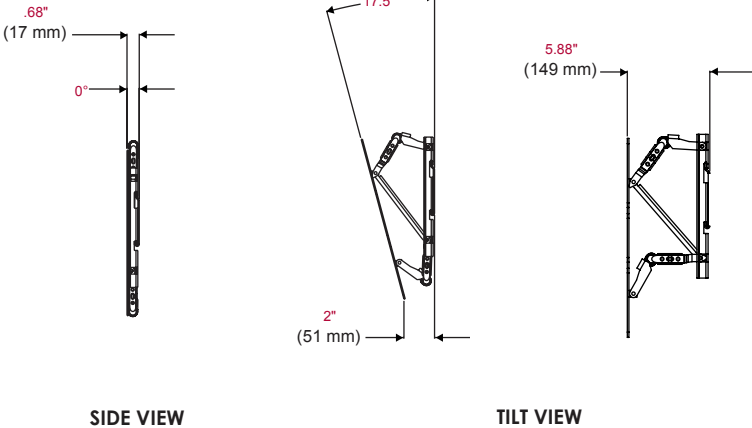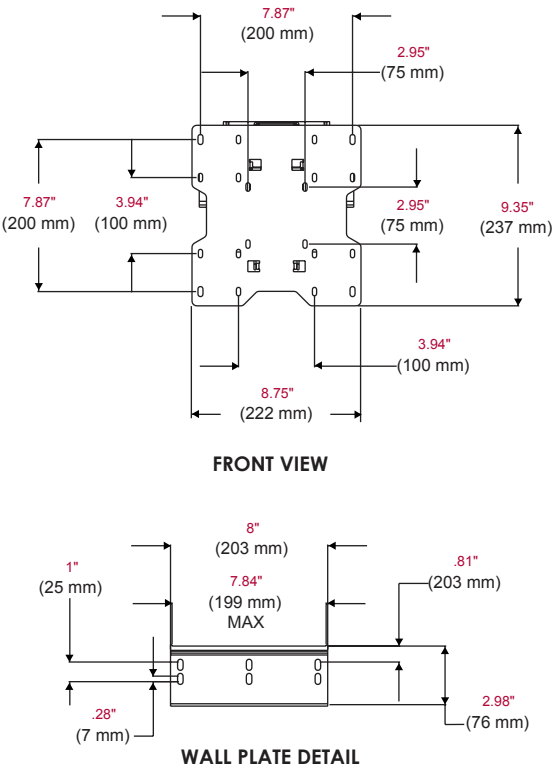

- NOTE: Screen Compatibility Requirements
- Designed exclusively for use with ultra-thin screens 2" (51 mm) deep or less
- The screen does not require any additional heat ventilation room than 0.68" (17 mm). Please refer to the manufacturer's requirements for mounting your screen on the wall.
 - The screen must have a flat mounting surface, or the mounting holes need to be on the furthest back surface of the screen.
 - Input/Output connection must be properly orientated to accommodate mounting 0.68" (17 mm) from the wall.

ARCHITECTS SPECIFICATIONS

The Ultra-Thin Universal Tilt Wall Mount shall be a Peerless model **SUT632P** and shall be located where indicated on the plans. It shall be constructed of cold rolled steel and feature scratch resistant gloss black fused epoxy finish. Assembly and installation shall be done according to instructions provided by the manufacturer.