

The DC-96C is the newest addition to the classic DC-96 line. It has been upgraded with our latest and most advanced technology and is outstanding for acoustic sources like guitar and piano.



The DC-96C is the newest addition to the classic DC-96 line. It has been upgraded with our latest and most advanced technology and is outstanding for acoustic sources like guitar and piano.


- **Cardioid**
- **Transformerless**
- **Rectangular large dual membrane capsule**
- **Shock absorbing rubber fitted capsule**
- **12 dB attenuation pad**
- **48 V phantom**

Frequency response ( see graph )	20 - 20 000 Hz
Polar pattern	Cardioid
Max. SPL (1% THD at 1 kHz)	132 dB
Max. SPL with 12dB attenuation pad	144 dB
Sensitivity at 1kHz	21.5 mV / Pa (± 1dB)
A-weighted noise level (IEC 179-A)	12 dB
Power supply	48 V ± 4 V phantom
Current consumption	4.2 mA
Output impedance	< 200 Ω
Minimum load impedance	1 kΩ
Connection	3-pin XLR Pin 1: earth (Shield) Pin 2: plus (Hot) Pin 3: minus (Cold)
Net weight	220 g
Length	145 mm
Diameter	27 mm




### Frequency response (at 1m)

The frequency response may vary within ± 2.5 dB of the published graph. Each microphone is measured and delivered with its own frequency chart.

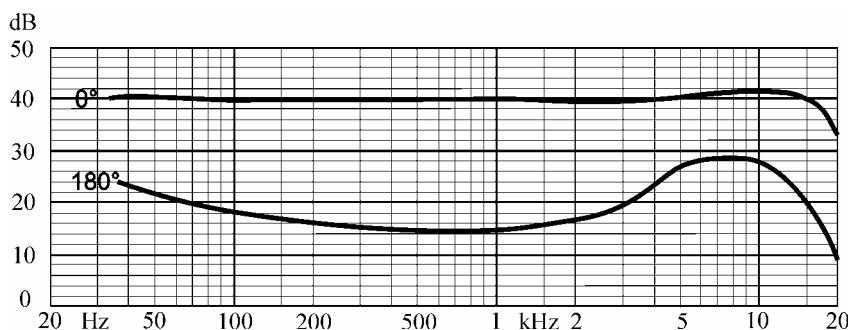

### Polar diagram

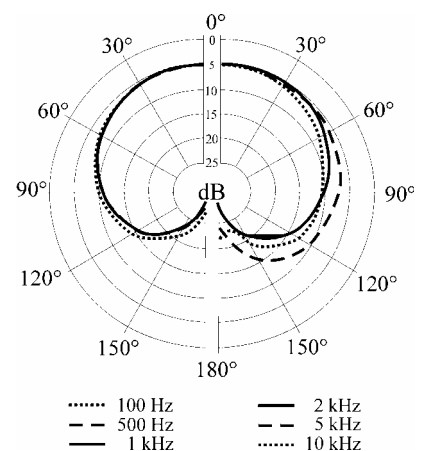

### Milab Microphones AB

Mailing address  
P. O. Box 1342  
S-251 13 HELSINGBORG  
SWEDEN

Office address  
Norra Strandgatan 4

Phone  
+46 42 381620

Fax  
+46 42 136350

E-mail  
milab@milabmic.com  
Internet  
www.milabmic.com