


Topaz™ 24 Dimmer Rack

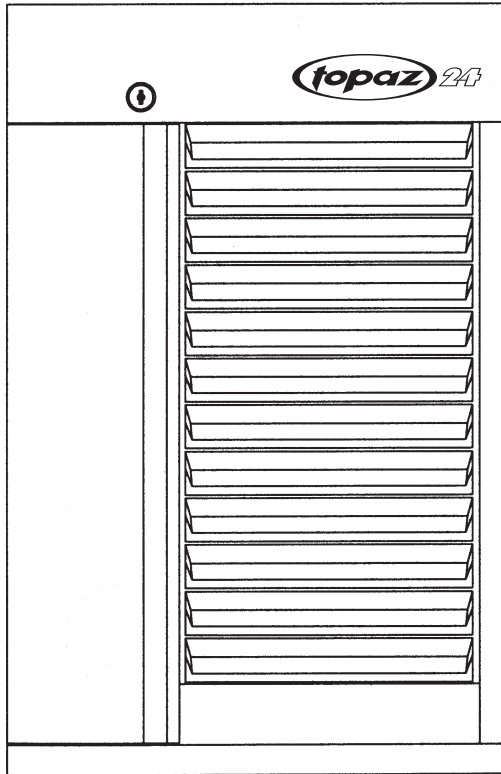

FEATURES

- TOPAZ 24 houses twelve plug-in dimmer modules available in 120 volt dual 1.8kW, 2.4kW, single and 240 volt dual 2.5kW capacities (order dimmer modules separately)
- Plug-in electronic control module (order separately)
- Top and bottom panels are pre-punched with knockouts for line and load runs (quickly and easily installed)
- Rugged compact design
- Single or three-phase input power, 120 or 240 volts
- Locking door to prevent unwanted access to rack
- Ambient air is drawn through the dimmer and exhausted through the rack top. The airflow is not drawn over any electrical connections. No filter is required
- UL Listed (120V units)
- CSA Certified (120V units)

DIMENSIONAL DATA - IN. [CM] LBS. [KG]

Width	14.0 [35.6]
Depth	9.0 [22.9]
Height	21.5 [54.6]
Weight (w/dimmers)	57.0 [25.9]

CAT. NO.	DESCRIPTION
TZ024-000	Topaz 24 Dimmer Rack, for:
TZ024-00D	Topaz 48 Dimmer Bank, with:
TZ024-24D	
TZ024-240	Topaz 24 circuit 240V Dimmer Rack
TZMOD-FIL	Airflow Module
TZMOD-018	1.8kW Dual Universal dimmer module
TZMOD-024	2.4kW Dual Universal dimmer module
TZMOD-0CM	20A Constant Module
TZMOD-224	2.5kW Dual Universal Dimmer Module
TZMOD-T24	Topaz Dimmer Module, 20A, 120V with Thermal Magnetic Breakers
TZMOD-260	Topaz Dimmer Module, 240V, 25A
TZCMD-g61	Topaz g6 Rack Control Module Wired 1-1, 120V
TZCMD-g6P	Phase Balanced Rack Control Module (Topaz g6, 2 per Rack)
TZCMD-UNV	Universal Control Module (for 12 and 24 racks)
TZCMD-DMX	Remote Control Module
TZCMD-2g1	Topaz g6 Rack Control Module Wired 1-1, 230V
TZCMD-2gP	Topaz g6 Rack Control for 230V racks Module - Phase Balanced (2 per Rack)
TZCMD-2UN	Universal Control Module (for 12 and 24 230V racks)
TZCMD-2DX	Remote Control Module for 230V racks
ACCESSORIES	
TZ0SR-KIT	Semi-Recessed Mounting Kit.
TZ1PH-CVN	Single Phase Conversion Kit.

Topaz™ 24 Dimmer Rack

SPECIFICATIONS

- The TOPAZ 24 dimmer rack is a wall-mount dead front switchboard measuring 21 1/2”H x 14”W x 9”D and housing all specified equipment. Constructed of code gauge formed steel and aluminum structural members, all surfaces are finished in black polyurethane paint. The rack weighs 24 lbs. (57 lbs. including dimmer and control modules).
- Racks are designed to allow for adjacent or back-to-back mounting of multiple racks. The rear section of the rack utilizes a contactor’s wireway with a minimum of 5” of wiring space behind the dimmer module. The following multi-size knockouts are provided on both the top and bottom of the rack for contractor entry: four 1/2”, 3/4”, 1 1/4” knockouts and one 1 1/2”, 2”, 2 1/2” knockout.
- The rack is constructed to permit insertion and removal of dimmers and control modules without the use of tools. Positive, interlocking guides provide precise alignment of the dimmers to the signal and power connectors in the rack. Dimmer supports incorporated into the sides of the rack, allow clear access to the power load, and neutral terminals and the wireway.
- The rack is designed to contain twelve plug-in dimmer modules. Each dual module position has a mating power bus, two load connectors and three gold-plated PC signal contacts. The control module position includes appropriate contractor control signal terminal blocks and a signal distribution connector.
- The rack contains a continuous-duty low-noise fan with a maximum NC rating of 27 to maintain temperature at proper operating levels with all dimmers under full load and ambient temperature up to 104° (40°C). The rack provides an airflow sensor to shut off dimmers in the rack if safe operating temperatures are exceeded. Cooling air is drawn through the dimmers and exhausted through the top of the rack. Since there is no air flow over any electrical connections in the dimmer, no filtration is required.

MECHANICAL

- The rack has a lockable door with a maximum swing radius of 4 1/2” to prevent unauthorized access to dimmer and control modules. A blank label is provided inside the door directly adjacent to each dimmer for user identification of each circuit.
- Both load and neutral terminals accept up to a #2 gauge wire. Neutral terminals are located directly adjacent to load terminals for ease of contractor wiring. Provisions are made for optional fault current protection devices which may be installed and serviced from the front of the rack.
- The rear of the rack contains holes for 3/8” diameter bolts for simple contractor installation onto a wall. The location of holes are on 16” centers for mounting the Topaz 48 on wall studs.

ELECTRICAL

- The rack is designed to operate from 120 or 240 volts and either single or three phase power.
- The rack is factory-tested and control modules are burned in at elevated temperatures for a minimum of four hours. The rack is UL Listed and CSA Certified for 120V applications and has an interrupting capacity of 10,000A.

LEVITON SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc. Lighting Management Systems

20497 SW Teton Avenue, Portland, OR 97062
 Telephone: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Monday-Friday): 1-800-959-6004

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/lms