




WALL MOUNT ENCLOSURE

600-12

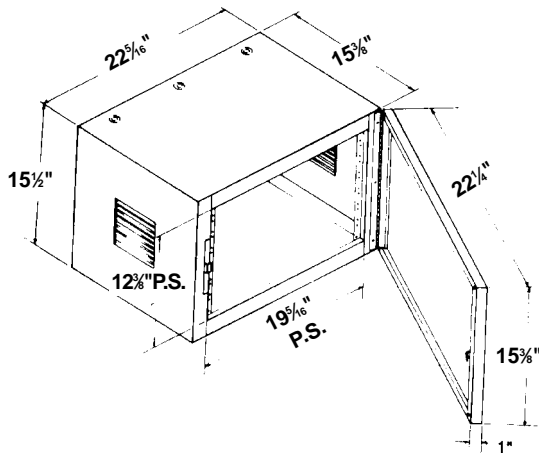

FEATURES

- 16 Gauge CRS all welded construction with 11 gauge CRS tapped mounting rails
- Locking front door
- Vents on each side
- 10-32 pan head screws for panel mounting
- Completely assembled
- Convenient Pre-Punched Back Panel for Wall Mounting

GENERAL DESCRIPTION

Atlas Sound Model 600-12 is a surface mounting wall cabinet used for housing small electronic system installations including 19" wide amplifiers, tuners and associated communication controls for schools, churches, clubs and recreation facilities. The 600-12 has a vertical panel opening of 12 $\frac{3}{8}$ " (314mm) and is constructed of 16 gauge CRS. Louvers on each side of the cabinet are provided for ventilation. The 11 gauge CRS panel mounting rails are recessed $\frac{5}{8}$ " (16mm) for a "flush" look. Locking front door is standard. Panel-mounting screws (10-32 x $\frac{3}{4}$ ") are provided for equipment panel and accessory mounting. Mounting rails are tapped 10-32 on EIA spacing. Three double $\frac{1}{2}$ " (13mm) and $\frac{3}{4}$ " (19mm) knockouts are provided on the top and bottom of the cabinet for wire entry. Four keyhole slots for wall hanging are provided on the back panel. The 600-12 is shipped completely assembled and is finished in (#962) black epoxy powder coat.

UL Listed version is available.

ARCHITECT & ENGINEER SPECIFICATIONS

The wall mounted cabinet shall be Atlas Sound _____ (Model 600-12) or approved equal. It shall be constructed of 16 gauge CRS with 11 gauge CRS mounting rails. The cabinet shall have a locking front door. Internal louvers shall be provided for ventilation. Three double $\frac{1}{2}$ " (13mm) and $\frac{3}{4}$ " (19mm) knockouts shall be provided on the top and bottom of the cabinet to facilitate wiring. Four keyhole slots shall be provided on the back panel to accommodate wall hanging. The cabinet shall accommodate standard 19" (483mm) rack panels and have a vertical panel opening of 12 $\frac{3}{8}$ " (314mm). The cabinet shall be provided with twelve 10-32 x $\frac{3}{4}$ " (19mm) panel mounting screws and the mounting rail shall be tapped 10-32 on EIA spacing. Enclosure shall be shipped completely assembled.

MODEL	WIDTH	HEIGHT	DEPTH	PANEL SPACE	WEIGHT
600-12	22 $\frac{5}{8}$ " (567mm)	15 $\frac{1}{2}$ " (394mm)	15 $\frac{1}{8}$ " (391mm)	12 $\frac{3}{8}$ " (314mm)	45 lbs. (20.41 kg)

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A. / TELEPHONE: (800) 876-3333 / FAX (800) 765-3435