

AN-MINI Speaker Monitor

Technical Specifications



The AN-Mini speaker monitor is the most powerful, smallest system in the market. The AN-Mini is battery-operated so you can take it anywhere. Just switch it on and you are ready for indoor or outdoor assemblies anywhere. You can also connect your ipod, MP3 player or CD Player to the AN-Mini's convenient Line In jack.



Features

- Reach Crowds of 50+
- Delivers 101 dB of Clear Sound
- Built-in UHF Wireless Receiver Available
- Lightweight at only 2.5 lbs
- Line In Jack for iPod, MP3 & CD Player
- 16 Channel UHF Diversity Wireless by Anchor Audio
- 4.5" Neodymium Woofer & 30W Amplifier
- Phantom-powered Input for Electret-type Microphone
- Handheld Wired Microphone Available
- Optional Rechargeable Kit

AN-130 MODELS


- AN-MINI AC/DC powered speaker monitor
- AN-MINIU1 AN-MINI with one built-in wireless receiver

ACCESSORIES

- MIC-50 Dynamic handheld wired microphone
- SOFT-30 Soft case - custom colors available
- SS-300 Speaker stand
- RC-30 Battery charging kit

UHF WIRELESS

- WH-6000 Wireless handheld microphone/transmitter
- WB-6000 Wireless body-pack transmitter (requires handsfree microphone)
Microphone options include:
Over-the-Ear/EM-TA4F,
Lapel/LM-60,
Collar/CM-60,
Headband/HBM-TA4F

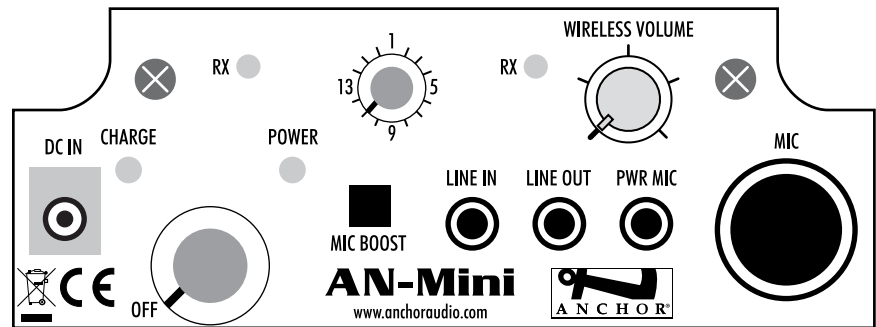

(AN-MINIU1 Control Panel Shown)

TECHNICAL SPECIFICATIONS

Rated Power Output	30 Watts	Inputs	
Max SPL@Rated Power	101 dB @ 1 meter	Line	line level, 3.5 mm
Frequency Response	100Hz - 15KHz ±3dB	Powered Microphone	Lo-Z phantom power, 3.5 mm jack
Speaker Type	4.5" Neodymium woofer	Microphone	Lo-Z, 1/4" phone
Battery Type	Ten 'AA' alkaline	RC-30 - Recharge Kit (optional)	
Dimensions (HWD)	5.5" x 5.5" x 6.5" (14 x 14 x 16.5 cm)	Battery Type	Ten 'AA' size, NiMH 2.5 Ah
Weight	2.5 lbs / 1.13 Kg	Charger	AC-30
Output		AC-30 Input	120 VAC, 60Hz, 24 watt max
Line	line level, 3.5 mm	AC-30/220 Input	220 VAC, 50Hz, 24 watt max
		Shipping Weight	3 lbs / 1.4 Kg



(Features & Specifications Subject To Change Without Notice)