


DIGI-HD-UHR2 Installation Manual

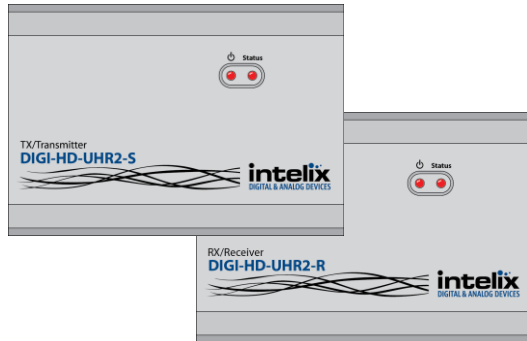

The Intelix DIGI-HD-UHR2 transmits HDMI up to 300' over a single twisted pair cable. In environments with high electromagnetic interference (EMI), a shielded twisted pair cable should be used.

Built-in HDshāk® technology provides dynamic HDMI, EDID/DDC and HDCP mode selection, guaranteeing performance and image quality. Plus, onboard HDMI amplification and buffering allows multiple extenders to be daisy-chained for greater distances.

The DIGI-HD-UHR2 features electrostatic discharge (ESD) protection circuitry which safeguards the HDMI circuit against static electricity and other destructive stray voltage.

Design with Intelix and Design with Intelligence.


| Maximum Recommended Distances | | | | | |
|-------------------------------|-------|-------|------|--------|--------|
| | 1080p | 1080i | 720p | 576i/p | 480i/p |
| Cat 6a (shielded) | 150' | 300' | 300' | 300' | 300' |
| Cat 6 | 110' | 220' | 220' | 220' | 220' |
| Cat 5e | 100' | 200' | 200' | 200' | 200' |

Caution: Do not attempt to disassemble or alter the extender housing. There are no user-serviceable parts inside the unit. Doing so will void your warranty.

Caution: To minimize the possibility of equipment damage from electrostatic discharge (ESD), all source and destination equipment must be powered off during installation.

Instructions

1. Turn off power and disconnect the audio/video equipment by following the manufacturer's instructions.
2. Make certain that outlets and cross connects to which you will connect the DIGI-HD-UHR2 are configured properly and labeled correctly to identify the point-to-point circuit.
3. Verify the desired twisted pairs are not being used for other LAN or telephony equipment.
4. Verify that the source and destination equipment work when directly connected with HDMI cables. Be sure to test both HDMI cables required for system installation.
5. Connect the DIGI-HD-UHR2 transmitter to the HDMI output of the video source. Do **not** connect the 5V power supply.
6. Connect the DIGI-HD-UHR2 receiver to the HDMI input of the receiving device at the remote end. Do **not** connect the 5V power supply.
7. Complete the connection between the transmit and receive extenders using twisted pair cable. Ensure the cable conforms to EIA 568B crimp standards and there are no split pairs or taps.
8. Connect the 5V power supply to the DIGI-HD-UHR2 receiver.
9. Connect the 5V power supply to the DIGI-HD-UHR2 transmitter. Power-on the video equipment.
10. Verify picture quality.
11. If necessary, adjust the DIP switches on the transmit and receive extenders to select modes of operation.
12. If necessary, copy the EDID information from your display for improved performance.

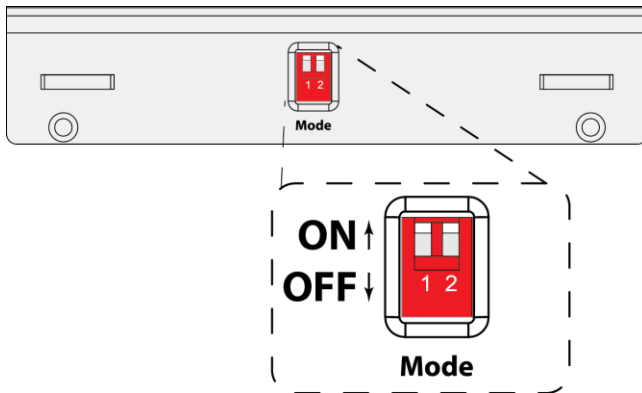

Copying Display EDID

1. Disconnect the transmitter from the source device.
2. Disconnect the receiver from the display.
3. Connect the transmitter to the destination device via an HDMI cable.
4. Connect the 5VDC power supply to the transmitter.
5. Press the *Copy EDID* button. The *Status* LED will flash and remain solid. The EDID signals have been copied and stored.
6. Disconnect the transmitter and repeat normal installation procedures.

DIGI-HD-UHR2 Transmitter Dip Switch Positions

| SW 1 | SW 2 | Mode |
|------|------|--------------------------------|
| Off | Off | Read EDID data from displays |
| Off | On | 1080p with multi-channel audio |
| On | Off | 1080p with stereo audio |
| On | On | No function |

*The DIGI-HD-UHR2 system must be power cycled for the changes to take effect.

DIGI-HD-UHR2 Receiver Dip Switch Positions

| SW 1 | SW 2 | Mode |
|------|------|--------------------|
| Off | Off | Normal Operation |
| Off | On | Compatibility Mode |
| On | Off | Compatibility Mode |
| On | On | No function |


*The DIGI-HD-UHR2 system must be power cycled for the changes to take effect.

Troubleshooting

| Symptom | Possible Solutions |
|--|---|
| No signal Status LED is off | Verify that both ends of the twisted pair cable use 568B crimp pattern. Verify HDMI cables and source and destination HDMI ports are operational. |
| No signal | Verify the power supplies are connected to both the send and receive baluns. Verify the power LEDs on both the send and receive units are brightly illuminated. |
| Unusual colors in the video | Power off the destination device and power it back on to force renegotiation. Unplug and re-plug the HDMI cable from receive balun to force renegotiation. |
| No signal Screen is completely snowy Speckling in the video image Occasional signal dropouts Video without audio | Use a shorter run of twisted pair cabling. Drop the HDMI signal to the next lower resolution; i.e., decrease resolution from 1080p to 1080i, etc. Replace the twisted pair cable with a higher grade twisted pair cable; i.e., replace Cat 5e with Cat 6. Activate compatibility mode. |
| Speckling in the video image | If the destination device is incapable of displaying the video signal, alter the source signal; i.e., decrease resolution from 1080p to 1080i, etc. |
| Video without audio | Change source device to output PCM other than Bitstream audio Enable PCM down sampling if supported by your source device |

The Intelix DIGI-HD-UHR2 conforms to HDMI and HDCP specifications.

Intelix does not guarantee operation with devices that do not conform to these specifications.

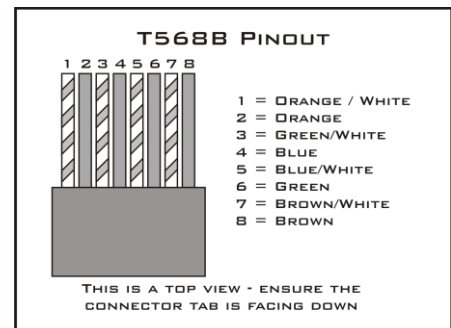

Distances and picture quality may be affected by cable grade,

cable quality, source and destination equipment, RF and electrical interference, and cable patches.