



VADDIO™ ZOOMSHOT™ 20 QSR SYSTEM

High Definition Camera System with 20X Optical Zoom
featuring the Quick-Connect SR Interface

Model Number 999-6920-300 (North America)

Model Number 999-6920-301 (International)



Quick-Connect SR Interface



Inside Front Cover - Blank, Mostly

TABLE OF CONTENTS

| | |
|---|----|
| Overview | 4 |
| Unpacking: | 5 |
| ZoomSHOT 20 Front View with Feature Call-outs | 5 |
| Image: ZoomSHOT 20 HD PTZ Camera | 5 |
| Rear Panel Connections with Callouts..... | 6 |
| Image: ZoomSHOT 20 HD Camera | 6 |
| Table: ZoomSHOT 20 DIP Switch Settings | 6 |
| Table: ZoomSHOT 20 HD VIDEO Selections | 6 |
| Quick-Connect SR Interface | 7 |
| Image: Rear Panel with Feature Call-outs | 7 |
| Image: Basic Wiring Configuration | 8 |
| First Time Set-up: | 8 |
| Step By Step Installation Instructions: | 9 |
| General Specifications..... | 10 |
| Vaddio IR SHOT Commander Remote | 11 |
| Image: Vaddio IR SHOT Commander Hand-held IR remote | 11 |
| Table: ZoomSHOT 20 OSD Menu Structure | 12 |
| Compliance and CE Declaration of Conformity - ZoomSHOT 20 | 14 |
| Warranty Information | 15 |
| Appendix 1: Pin-outs for ZoomSHOT 20 Camera and Quick-Connect SR | 16 |
| Table: EZ-POWER VIDEO RJ-45 Connector Pin-outs | 16 |
| Table: ZoomSHOT 20 Camera RS-232 Port | 16 |
| Table: Quick-Connect SR DE-15 Pin-Output (Analog Component YPbPr) | 16 |
| Communication Specification | 17 |
| ZoomSHOT 20 Command List (1/2)..... | 17 |
| ZoomSHOT 20 Command List (2/2)..... | 18 |
| ZoomSHOT 20 Inquiry List (1/1) | 19 |

OVERVIEW:

The Vaddio ZoomSHOT 20 QUSB camera system produces amazing results for small, medium and large room applications. Anywhere that a Point-of-View or stationary camera can be used alone or in conjunction with a Vaddio PTZ camera, to simplify camera coverage and preset positioning, the ZoomSHOT 20 is the answer.

Essentially, the ZoomSHOT 20 camera is a low cost pan/tilt/zoom camera, where the pan and tilt are adjusted manually. However, unlike fixed-lens stationary cameras, the ZoomSHOT 20 is equipped with a 20X optical power zoom lens that produces a horizontal field of view ranging from 63° on the wide end to 3.47° on the tele end in a HD 16:9 format.

ZoomSHOT 20 was designed from the ground up and uses the Vaddio EZCamera™ Cat-5 wiring standard for video, power and control. The ZoomSHOT 20 supports a wide range of HD video resolutions that are selectable on the rear panel up to the native 1080p/60 resolution. This camera can deliver HD video signals, power and control up to 150' (45.72m) on Cat-5 cable.

This system features the Quick-Connect SR Interface, which was the first HD analog video, power and control interface designed by Vaddio or anybody else for that matter. The EZ-POWER VIDEO jack, color coded orange, carries power to the camera and returns HSDS™ (high speed differential) HD video over the same cat-5/5e/6 cable. The video output of the Quick-Connect SR is clean YPbPr analog component. The RS-232 jack, color coded blue, provides bi-directional control and IR Forwarding to and from the camera.

Choose between three (3) IR frequencies for the Vaddio IR SHOT Commander to allow multiple cameras to be locally IR controlled with a single remote control. And like all Vaddio camera packages, the thin profile wall mount is included.



Image: ZoomSHOT HD Camera (above) and rear panel (below)



Image: Quick-Connect SR Interface

Intended Use:


Before operating the device, please read the entire manual thoroughly. The system was designed, built and tested for use indoors with the power supply provided. Outdoor operation or use of a different power supply has not been tested and could damage the device and/or create a potentially unsafe operating condition.

Important Safeguards:

Read and understand all instructions before using. Do not operate any device if it has been dropped or damaged. In this case, a Vaddio technician must examine the product before operating. To reduce the risk of electric shock, do not immerse in water or other liquids and avoid extremely humid conditions.



Use only the power supply provided with the system. Use of any unauthorized power supply will void any and all warranties.



Please do not use "pass-thru" type RJ-45 connectors. These pass-thru type connectors do not work well for professional installations and can be the cause of intermittent connections which can result in the RS-232 control line failing and locking up, and/or compromising the HSDS (high speed differential) signals. For best results please use standard RJ-45 connectors and test all cables for proper pin-outs prior to connection to Vaddio product.

Save These Instructions:

The information contained in this manual will help you install and operate your product. If these instructions are misplaced, Vaddio keeps copies of Specifications, Installation and User Guides and most pertinent product drawings for the Vaddio product line on the Vaddio website. These documents can be downloaded from www.vaddio.com free of charge.

UNPACKING:

Carefully remove the product and all of the included parts from the packaging.

ZoomSHOT 20 QSR Camera System (North America):**Part Number: 999-6920-300**

- One (1) ZoomSHOT 20, HD Camera (998-6920-000)
- One (1) Vaddio IR Shot Commander Remote
- One (1) Quick-Connect SR Interface (998-1105-016)
- One (1) 24 VDC, 2.0 A Power Supply with Power Cord for North America
- One (1) Thin Profile Wall Mount with Mounting Hardware
- One (1) EZCamera Cat-5 Control Adapter (RJ-45-F to DB-9-F)
- Quick-Start Guide

NOTE: Full manuals are downloaded from support.vaddio.com

**ZoomSHOT 20 QSR Camera System (International):****Part Number: 999-6920-301**

- One (1) ZoomSHOT 20, HD Camera (998-6920-000)
- One (1) Vaddio IR Shot Commander Remote
- One (1) Quick-Connect SR Interface (998-1105-016)
- One (1) 24 VDC, 2.0 A Power Supply
- One (1) Euro Power Cable
- One (1) UK Power Cable
- One (1) Thin Profile Wall Mount with Mounting Hardware
- One (1) EZCamera Control Adapter (RJ-45-F to DB-9-F)
- Quick Start Guide

NOTE: Full manuals are downloaded from support.vaddio.com

**ZoomSHOT 20 Front View with Feature Call-outs**


Image: ZoomSHOT 20 HD PTZ Camera



- 1) **Lens:** 20X Optical Zoom Lens
- 2) **IR Sensor and Power/Tally LED:** The IR sensor for the IR SHOT Commander Remote is located here. In a separate opening, a blue LED power light and a red LED tally resides (it turns purple on boot up too).
- 3) **The Yoke:** For manual pan and tilt. Tilt range is $\pm 30^\circ$ and Pan is limited to the service loop of the cabling.
- 4) **The Aluminum Base and Steel Cylindrical Body:** Please don't drop it on your foot, it's fairly substantial.
- 5) **Logo:** Really Cool Logo Badge (RCLB). The RCLB is affixed to the base in a recessed ovoid area.

Rear Panel Connections with Callouts

Image: ZoomSHOT 20 HD Camera

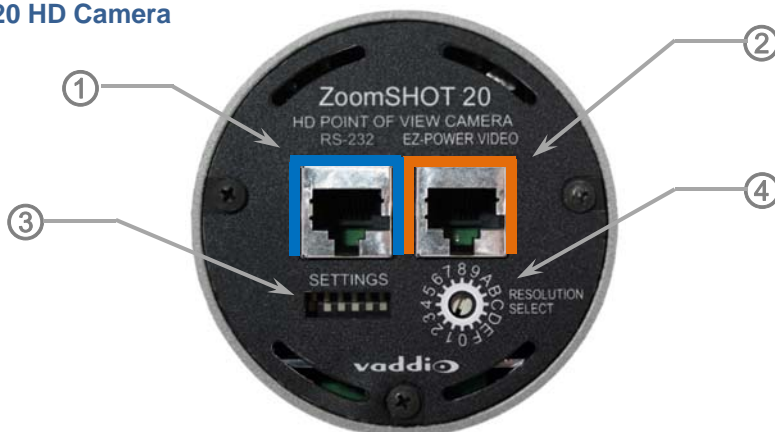

1) RS-232 (Color Coded Blue): The RS-232 RJ-45 accepts modified VISCA protocol for camera control.

2) EZ-POWER VIDEO Port (Color Coded Orange): This RJ-45 connector is only used with the Quick-Connect SR, Quick-Connect DVI-D/HDMI SR Interface, Quick-Connect USB and USB Mini Interfaces to supply power and return HSDS (differential) video from the camera over Cat-5/5e/6 cable up to distance of 150' (45.72m).

3) ZoomSHOT 20 DIP Switch Settings: Settings for IR remote frequency, IR receiver on/off, image flip and defaults can be configured on these switches. See the Switch Settings page for additional information. The dip switch settings are as follows:

Table: ZoomSHOT 20 DIP Switch Settings

| DIP Switch | Function |
|------------|--------------------------------------|
| 1 | Up = IR1, Down = IR2 |
| 2 | Up = IR 1 or 2, Down = IR3 |
| 3 | Up=IR ON, Down = IR OFF |
| 4 | Up = Normal Image, Down = Image Flip |
| 5 | Not Used |
| 6 | Not Used |
| All Down | Reset to Defaults - with power cycle |



4) HD Video Select:

A rotary switch allows the user to choose the component HD output video resolution and format. After setting or changing the resolution, reboot the camera to ensure proper operation. Simply set the rotary switch to an assigned position to output video. The HD Video Select Rotary Switch Settings are as follows:

Table: ZoomSHOT 20 HD VIDEO Selections

| Rotary | Resolutions | Rotary | Resolutions |
|--------|-------------|--------|-------------|
| 0 | 720p/59.94 | 8 | 1080p/50 |
| 1 | 1080i/59.94 | 9 | -- |
| 2 | 1080p/59.94 | A | -- |
| 3 | 720p/60 | B | -- |
| 4 | 1080i/60 | C | -- |
| 5 | 1080p/60 | D | -- |
| 6 | 720p/50 | E | 1080p/30 |
| 7 | 1080i/50 | F | 1080p/25 |




Point the notch in the switch stem to assign the rotary position

Notes:

- Set the rotary switch to an assigned position. If put on an unassigned position, then 720p/60 will be displayed.

QUICK-CONNECT SR INTERFACE

Image: Rear Panel with Feature Call-outs

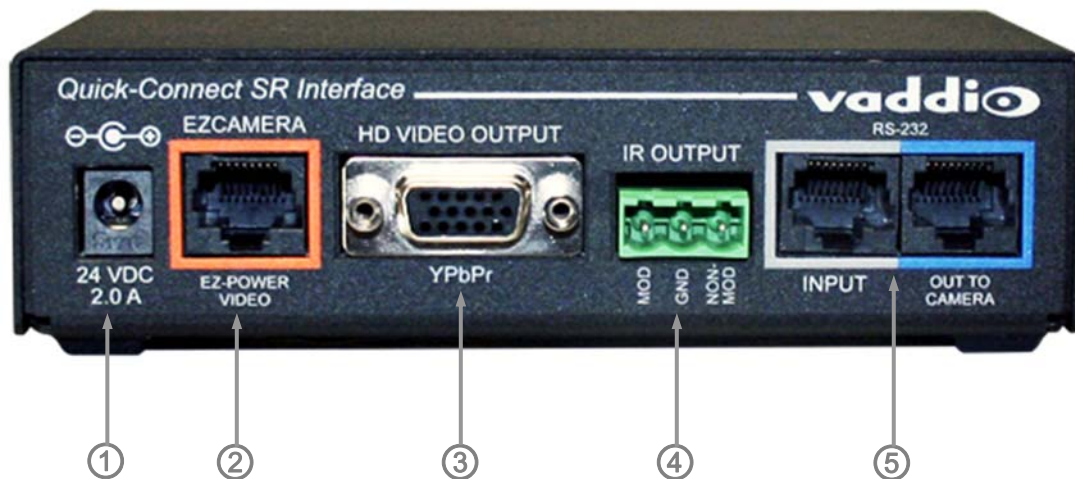

1) Power Input:

A 5.5mm OD x 2.5mm ID coaxial connector for the provided 24 VDC, 2.08 Amp power supply.

2) EZ-POWER VIDEO Port (Color Coded Orange):

A single Cat-5 connection between the EZCAMERA POWER & HD VIDEO RJ-45 connector and the camera's EZ Power HD Video Port on the HD-20 camera extends power and video. Power is fed to the camera and HSDS video is returned from the camera on the same Cat-5.

3) HD Video Output:

DE-15 connector outputs the YPbPr analog component HD video, which was extended from the camera over Cat-5 cable. SD video resolutions (Y/C and CVBS formats) are not supported by the Quick-Connect SR Interface, however analog component SD video is supported.

4) IR Output:

With the IR pass-thru turned ON (see camera dip switch settings), IR from third-party IR remote controls can be sent through the ZoomSHOT camera to third-party equipment, such as hardware videoconferencing codecs. IR can be used as either modulated (through the air) or non-modulated (wired) signals.

5) RS-232 INPUT (Color Coded Grey) & RS-232 OUT TO CAMERA Jacks:

These RJ-45 connectors allow an external controller (beware of upcoming shameless plug) like the ProductionVIEW™ Precision Camera Controller to route through the Quick-Connect SR for ease of cabling.

Image: Basic Wiring Configuration

ZoomSHOT 20 HD POV Camera with Quick-Connect SR Interface (color coded connectors) and ProductionVIEW Precision Camera Controller.



FIRST TIME SET-UP:

The ZoomSHOT 20 was designed to be very easy to use and operate. There is documentation at the back of this manual for pin-outs of the connectors on the Quick-Connect and camera.

Before Installing:

- Choose camera mounting location, paying close attention to camera viewing angles, lighting conditions, possible line of site obstructions, and checking for in-wall obstructions where the camera is to be mounted. Always pick a mounting location that will optimize the performance of the camera. Please locate the camera to enable easy positioning of the camera body with the ability to point down and away from the ceiling and a pile of fluorescent lighting cells. *Cameras generally don't like to be swamped with fluorescent light and nobody sits on the ceiling anyway.*
- The Thin Profile Wall Mount for the ZoomSHOT 20 can be mounted directly to a 1-gang wall box or can be mounted using only dry wall anchors.
- For Power/Video and RS-232 signals, use standard Cat-5 cable (568B termination and real RJ-45 connectors) from the EZ-POWER VIDEO and RS-232 ports on the back of the ZoomSHOT to the Quick-Connect SR Interface. These jacks are *color coded* for ease of connection.



Step By Step Installation Instructions:

Step 1: After determining the optimum location of the camera, route, mark and test the two (2) Cat-5 cables from the camera to the Quick-Connect SR Interface located at the head-end. The two Cat-5e cables should feed-through the hole located on the rear flange of the Thin Profile Wall Mount. If the bracket is to be mounted on a 1-gang wall box, use the screws supplied with the wall box cover plate to attach the Thin Profile Wall Mount. If mounting to the drywall with wall anchors, use two (2) quality wall anchors. The mounting holes are slotted and are 90° opposing to provide easy leveling. Level the mount and tighten the mounting screws.



Step 2:

Using the HD VIDEO SELECT rotary switch and CAMERA SETTINGS dip switches on the back of the camera, set up the camera's output resolution and functional preferences. There are tables on previous pages that identify the choices...maybe keep these tables handy for future use...or you can easily look them up on the Vaddio website (vaddio.com) when needed.

On the camera:

- Set the desired HD Resolution with the rotary selection switch.
- Set the IR frequency of the camera (if it is to respond to the IR remote control).
- Set the image orientation (normal or flipped).

Step 3: Follow the sample wiring diagram for connecting the Cat-5 cables to the ZoomSHOT 20 and Quick-Connect SR Interface (yep, on the next page, but read and understand the rest of these instructions especially the next note).



NOTE: Check all Cat-5e cables for continuity in advance of the final connection. Label the Cat-5e cables. Plugging the EZ-POWER VIDEO cable into the wrong RJ-45 may cause damage to the camera system and void the warranty. For premise cabling, please use real RJ-45 connectors and crimpers. Please don't use the pull through or EZ-type RJ-45s.

Step 4: Place the camera onto the camera mount and use the provided 1/4"-20 screws to secure the camera to the mount. To dress the cabling, push the extra cable back into the wall opening.

Step 5: Connect the Vaddio 24 VDC, 2.08 Amp power supply to a power outlet and to the Quick Connect SR Interface. Power will travel down the EZ-POWER VIDEO Cat. 5 cable to the camera. The camera will boot up and in a few seconds, HSDS (differential) video will travel back down the Cat-5 cable and be ready to accept control information from the IR remote control or RS-232 camera controller.



To insure proper continuity of control and operation of the cameras, the RS-232 controller (control system or joystick) should be powered on after the camera.

GENERAL SPECIFICATIONS

| ZoomSHOT 20 QSR System | |
|-----------------------------------|--|
| Part Numbers | ZoomSHOT 20 QSR System 999-6920-300 (North America) ZoomSHOT 20 QSR System 999-6920-301 (International) |
| ZoomSHOT 20 Camera | |
| Image Sensor | 1/2.8-Type Exmor CMOS Image Sensor |
| Total/Effective Pixels | 2.38 Million Total Pixels, 2.14 Million Effective pixels |
| Video Output Resolutions | HD: 1080/59.94/50/30/25, 1080i/59.94/50, 720p/59.94/50, 16:9 Aspect Ratio |
| Lens/ Focal Length | 20X Optical Zoom, F=4.44mm wide end to 89mm tele end (F1.6 - F3.4), Min. Focus Distance 1.5m |
| Horizontal Viewing Angle | Horizontal: 63° Wide End to 3.47° Tele End, (16:9 Aspect Ratio) |
| Video S/N Ratio | >52 dB |
| Minimum Illumination | Color: 0.3 Lux (F1.6, 1/30 sec, 50 IRE), B/W: 0.03 Lux (F1.6, 1/30 sec, 50 IRE) |
| Serial Control Protocol | RS-232 (Modified VISCA) |
| Manual Pan/Tilt Range | Pan: Limited to service loop of cabling, yoke and base are mechanical only Tilt: $\pm 30^\circ$, Invertible for Ceiling Mount |
| Preset Positions | Six (6) Programmed and Recalled via IR Remote, 16 Programmed and Recalled with RS-232 |
| Tally Light | Available through RS-232 Control |
| Camera Connectors | Two (2) RJ-45 Jacks: <ul style="list-style-type: none"> • EZ-POWER VIDEO RJ-45 Jack for use with Quick-Connect - Supplies power to the camera and returns differential HD video from the camera • RS-232 RJ-45 Jack (RS-232 Communication) |
| HD Video Select | 16-Position Rotary Switch: Used to set the ZoomSHOT 20 HD Video Resolution Output |
| Camera Settings | 6-Position Dip Switch: For IR Frequency, IR ON/OFF and Image Flip |
| Thin Profile Wall Mount | 535-2000-237 (Provided with camera) Black powder coating, Sized to fit on 1-gang wall box or drywall, mounting hardware included |
| User Controls | IR Shot Commander Remote with OSD for camera set-up, RS-232 |
| Materials & Weight | Aluminum & Steel, Weight = 2.75643 lbs. (1.68kg) |
| Dimensions: | Tube: 3" (76.2mm) Diameter x 4.75" (120.65mm) Long Base: 5.5" (139.7mm) Diameter Overall Height: 5.5" (139.7mm) Tall |
| Quick-Connect SR Interface | |
| Connectors | <ul style="list-style-type: none"> • Power Connector: 5.5mm OD, 2.5mm ID coaxial connector • Power/Video RJ-45: Supplies power to, and differential HD video from the camera • Video Output: DE-15 connector for HD Analog Component (YPbPr) video only (No SD Support) • IR Output: Transmits modulated or non-modulated IR signals received from the camera's IR receiver • RS-232 IN RJ-45: Accepts RS-232 from ProductionVIEW or other external control systems • RS-232 OUT RJ-45: Sends RS-232 from Quick-Connect SR to the camera |
| Power Supply | 24 VDC, 2.0 Amp |
| Dimensions (H x W x D) | 1/3 Rack Size - 1.6" (40.64mm) H x 5.5" (139.7mm) W x 3.25" (82.55mm) D |
| Weight | 0.45 lbs. (0.2041165643 kg) |
| Accessory | Rack Mount Adapter: 998-6000-002 - Holds three (3) Quick-Connect SR Interfaces |

VADDIO IR SHOT COMMANDER REMOTE

Spatially Efficient IR Remote Controller for ZoomSHOT™ 20 and WideSHOT™ Camera Systems


The Vaddio IR SHOT Commander was designed to work with the Vaddio ZoomSHOT and WideSHOT camera systems and is compatible with the PowerVIEW™, ClearVIEW™ cameras. The Vaddio IR SHOT Commander is compatible with the following Vaddio camera packages:

- ZoomSHOT 20 and WideSHOT Camera Systems (shipped with these products)
- Vaddio ClearVIEW HD-20SE, PowerVIEW HD-22 and HD-30

The Vaddio IR Shot Commander is also compatible with the Sony® EVI series and the BRC series PTZ cameras.

Image: Vaddio IR SHOT Commander Hand-held IR remote

(Top View)

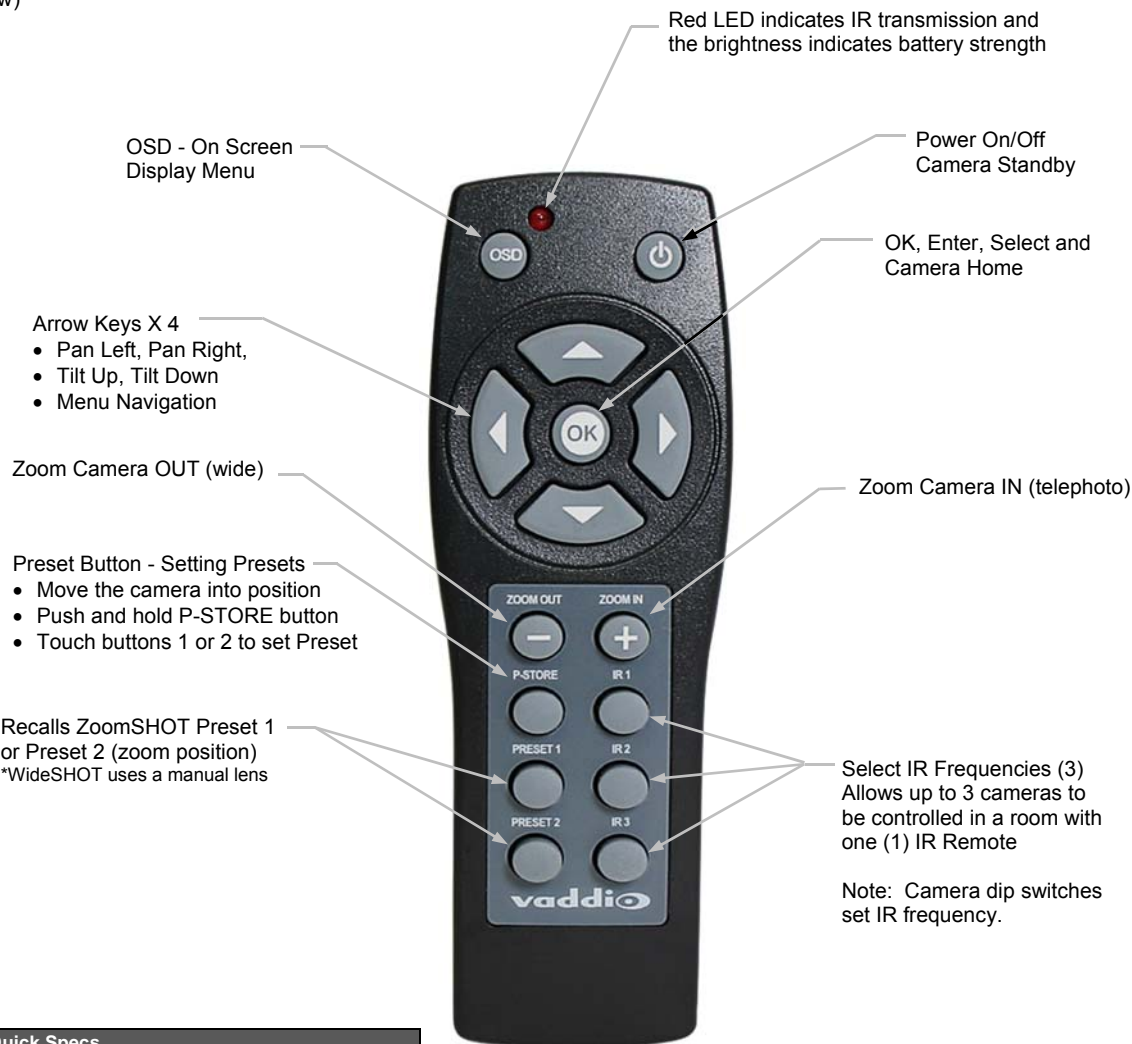



| Quick Specs | |
|---------------------------------|--|
| IR Range | 20' to 30' (6m to 9m) |
| Batteries | 2 x AAA (Batteries not shipped with 998-2101-001) |
| Keys (buttons) | 15 Silicone Rubber Keys |
| Dimensions L x W x H | 4.53" (115mm) x 1.57" (40mm) x 1.1" (28mm) |
| LED Indicator | Red LED Illuminates when transmitting IR, Brightness indicates battery strength |
| Compatible Cameras | Ships with ZoomSHOT and WideSHOT. Compatible with all Vaddio ClearVIEW,, PowerVIEW cameras (limited function set) and most Sony BRC & EVI cameras. |

TABLE: ZOOMSHOT 20 OSD MENU STRUCTURE

Use this OSD menu with the IR SHOT Commander to make video adjustments (AWB, COLOR, EXP, etc...) on the HD-20SE Camera.

| Menu | Controls | Modes/Range | Default | Notes |
|---------------------|--------------------------|---|---|---|
| SSDR | OFF | | OFF | Dynamic Range Adjustment |
| | ON | SSDR 0-15 | 8* | *When Dynamic Range is ON |
| | Return | | | Return to Main Menu |
| WHITE BAL | ATW | | ON | Auto White Balance - ON |
| | MANUAL> | RED 0 - 1000 | 560 | Adjust Red Level |
| | | BLUE 0 - 1000 | 480 | Adjust Blue Level |
| | | RETURN< | | Return to WHITE BAL Menu |
| | AWC-SET | | | |
| | OUTDOOR | Set to Outdoor when room has direct sun light and blue walls | | |
| | INDOOR | Set to Indoor when fluorescent lights start to cause color variation in ATW mode | | |
| | MERCURY | | | |
| | SODIUM | | | |
| | RETURN< | | | Return to Main Menu |
| BACKLIGHT | OFF | | OFF | Default BLC is off |
| | WDR> | LEVEL (LOW / MED / HIGH) | OFF | Wide Dynamic Range |
| | | RETURN< | | |
| | BLC> | LEVEL (LOW / MED / HIGH) | OFF | |
| | | BOTTOM 1-100 | | |
| | | LEFT 1-100 | | |
| | | RIGHT 1-100 | | |
| | | RETURN< | | Return to BACKLIGHT Menu |
| | HLC> | LEVEL (LOW / MED / HIGH) | OFF | |
| | | MASK TONE 1-15 | | |
| | RETURN< | | | Return to BACKLIGHT Menu Return to Main Menu |
| INTELLIGENCE | OFF | Intelligence, motion detection analytics and masking are not processed or used by the camera, however the OSD menu still works. | | |
| FOCUS | MODE | AUTO / MANUAL / ONE PUSH | AUTO | |
| | ZOOM TRACK> | OFF / TRACK / AUTO TRACK | AUTOTRACK | |
| | ZOOM SPEED> | SLOW / MEDIUM / FAST | | |
| | DIGITAL ZOOM> | OFF/ON | OFF | Default is OFF |
| | | ON>LIMIT X2 - X16 | | Avoid Digital Zoom if possible |
| | | RETURN< | | Return to FOCUS Menu |
| | Zoom POS INIT> | OFF/AUTO | | Zoom position initialization |
| | | MANUAL> | | |
| | | POS INIT 1X - 20X | 1X | Sets INIT Zoom Position |
| | | RETURN< | | Return to FOCUS Menu |
| | USER PRESET> | OFF/ON | OFF | |
| | | ON > PRESET NO 1-128 | 1 | Zoom Presets |
| | | PRESET SAVE | | |
| | | PRESET CLEAR | | |
| | | RETURN< | | Return to FOCUS Menu |
| | LENS INIT | MANUAL / AUTO | | |
| | RETURN< | | | Return to Main Menu |
| EXPOSURE | BRIGHTNESS | 0-100 | 50 | Brightness Sets Luminance Target |
| | IRIS> | AUTO | AUTO | Automatic Gain Control |
| | | MANUAL> | Closed to F28 | Manual Iris |
| | | RETURN< | | Return to EXPOSURE Menu |
| | SHUTTER | A FLK | Use Anti-Flicker when lighting causes color hunting | |
| | | ESC | | |
| | | MANUAL> 1/30 - 1/30,000 sec. | | Shutter Speed |
| | | RETURN< | | Return to EXPOSURE Menu |
| | AGC | OFF / LOW / MED / HIGH | LOW | |
| | | MANUAL (OFF)> | | |
| | | AGC VALUE 0 - 36dB | 0 dB | Automatic Gain Control |
| | | RETURN< | | |
| | SSNR | OFF / LOW / MED / HIGH | LOW | Noise Reduction - Don't use above Low |
| | SENS-UP | OFF | OFF | OFF - Do not Use |
| | RETURN< | | | Return to Main Menu |

ZoomSHOT 20 OSD Menu Structure (continued)

| Menu | Controls | Range/Modes | Default | Notes |
|----------------|-------------------------|------------------------|---|--|
| SPECIAL | DAY/NIGHT> | COLOR / B/W / AUTO | COLOR | Do not use |
| | DIS> | OFF / ON | OFF | Digital Image Stabilization - leave off |
| | DEFOG | OFF / ON / MANUAL/AUTO | OFF | Do not use |
| | COMM ADJUST> | BAUD RATE | NEVER CHANGE THE BAUD RATE OR THE UART SETTINGS - Control is lost if these are changed. Factory default reboot will be required.  | |
| | | UART | | |
| | | RETURN< | | Return to SPECIAL Menu |
| | IMAGE ADJUST> | H-REV ON / OFF | OFF | Use Dip Switch on Camera to Flip Image |
| | | V-REV ON / OFF | OFF | Use Dip Switch on Camera to Flip Image |
| | | SHARPNESS ON/OFF | ON | Picture Detail |
| | | ON> 0-30 | 15 | |
| | | RETURN< | | Return to IMAGE ADJUST Menu |
| | | MONITOR LCD> | | |
| | | GAMMA .0 -1.0 | 0.50 | |
| | | COLOR LEVEL 0-100 | 50 | |
| | | RETURN< | | Return to IMAGE ADJUST Menu |
| | | USER> | | |
| | | GAMMA .0 - 1.0 | 0.50 | |
| | | COLOR LEVEL 0-100 | 50 | |
| | | RETURN< | | Return to IMAGE ADJUST Menu |
| | | RETURN< | | Return to Main Menu |
| | DISPLAY | CAM TITLE ON / OFF | OFF | |
| | | ON> A-Z, 1-9 | | |
| | | RETURN< | | Return to DISPLAY Menu |
| | | CAM ID ON / OFF | OFF | |
| | | CAM INFO ON / OFF | OFF | |
| | | ZOOM MAG ON/OFF | OFF | |
| | | OSD COLOR | WHITE | WHITE/YELLOW/GREEN/RED/BLUE |
| | | LANGUAGE | ENGLISH | (ENG, FR, KOR, SP, CHIN, JAP, PORT, RUS, DUT, ITAL) |
| | | SET LANGUAGE | | |
| | | RETURN< | | Return to Main Menu |
| | VIDEO OUT FORM | COMPONENT ON / OFF | ON | Do not change this parameter |
| | | RETURN< |  | Do not change resolutions here - Use the Rotary Switch on the back of the camera |
| RESET | | | | |
| EXIT | | | | |

COMPLIANCE AND CE DECLARATION OF CONFORMITY - ZOOMSHOT 20

Compliance testing was performed to the following regulations:

- **FCC Part 15** (15.107, 15.109), **Subpart B**
- **ICES-003, Issue 4: 2004**
- **EN 55022:2010**
- **KN22 2008 (CISPR 22: 2006)**
- **KN24 2008 (CISPR 24: 1997 + A1: 2000 + A2: 2002)**
- **EMC Directive 2004/108/EC**
- **EN 55024: A2: 2003**

Class A
Class A
Class A
Class A
Class A
Class A
Class A

**FCC Part 15 Compliance**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15, Subpart B, of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference including interference that may cause undesired operation of the device.

Changes or modifications not expressly approved by Vaddio can affect emission compliance and could void the user's authority to operate this equipment.



Industry
Canada

Industrie
Canada

ICES-003 Compliance

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

**European Compliance**

This product has been evaluated for Electromagnetic Compatibility *under the EMC Directive for Emissions and Immunity and meets the requirements for a Class A digital device. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.*

Standard(s) To Which Conformity Is Declared:**EMC Directive 2004/108/EC****EN 55022:2010****EN 55024: A2: 2003**

- EN 61000-4-2: 1995 + Amendments A1: 1998 + A2: 2001
- EN 61000-4-3: 2006 + A1: 2008
- EN 61000-4-4: 2004 + Corrigendum 2006
- EN 61000-4-5: 2006
- EN 61000-4-6: 2009
- EN 61000-4-8: 2010
- EN 61000-4-11: 2004

KN24 2008 (CISPR 24: 1997 + A1: 2000 + A2: 2002)

- EN 61000-4-2
- EN 61000-4-3
- EN 61000-4-4
- EN 61000-4-5
- EN 61000-4-6
- EN 61000-4-8
- EN 61000-4-11

IEC 60950-1:2005 (2nd Edition); Am 1:2009**EN 60950-1:2006+A11:2009+A1:2010+A12:2011**

Class A

Immunity

Electrostatic Discharge

Radiated Immunity

Electrical Fast Transients

Surge Immunity

Conducted Immunity

Power Frequency Magnetic Field

Voltage Dips, Interrupts and Fluctuations

IT Immunity Characteristics

Electrostatic Discharge

Radiated Immunity

Electrical Fast Transients

Surge Immunity

Conducted Immunity

Power Frequency Magnetic Field

Voltage Dips, Interrupts and Fluctuations

Safety

Safety

WARRANTY INFORMATION

(See Vaddio Warranty, Service and Return Policies posted on vaddio.com for complete details):

Hardware* Warranty: Two (2) year limited warranty on all parts and labor for Vaddio manufactured products. Vaddio warrants its manufactured products against defects in materials and workmanship for a period of two years from the day of purchase, to the original purchaser, if Vaddio receives notice of such defects during the warranty. Vaddio, at its option, will repair or replace products that prove to be defective. Vaddio manufactures its hardware products from parts and components that are new or equivalent to new in accordance with industry standard practices.

Exclusions: The above warranty shall not apply to defects resulting from improper or inadequate maintenance by the customer, customers applied software or interfacing, unauthorized modifications or misuse, mishandling, operation outside the normal environmental specifications for the product, use of the incorrect power supply, modified power supply or improper site operation and maintenance. OEM products and products manufactured by other companies are excluded and are covered by the manufacturer's warranty.

Vaddio Customer Service: Vaddio will test, repair, or replace the product or products without charge if the unit is under warranty. If the product is out of warranty, Vaddio will test then repair the product or products. The cost of parts and labor charge will be estimated by a technician and confirmed by the customer prior to repair. All components must be returned for testing as a complete unit. Vaddio will not accept responsibility for shipment after it has left the premises.

Vaddio Technical Support: Vaddio technicians will determine and discuss with the customer the criteria for repair costs and/or replacement. Vaddio Technical Support can be contacted through one of the following resources: e-mail support at support@vaddio.com or online at vaddio.com.

Return Material Authorization (RMA) Number: Before returning a product for repair or replacement request an RMA from Vaddio's technical support. Provide the technician with a return phone number, e-mail address, shipping address, product serial numbers and original purchase order number. Describe the reason for repairs or returns as well as the date of purchase. See the General RMA Terms and Procedures section for more information. RMA's are valid for 30 days and will be issued to Vaddio dealers only. End users must return products through Vaddio dealers. Include the assigned RMA number in all correspondence with Vaddio. Write the assigned RMA number clearly on the shipping label of the box when returning the product. All products returned for credit are subject to a restocking charge without exception.

Voided Warranty: The warranty does not apply if the original serial number has been removed or if the product has been disassembled or damaged through misuse, accident, modifications, use of incorrect power supply, use of a modified power supply or unauthorized repair.

Shipping and Handling: Vaddio will not pay for inbound shipping transportation or insurance charges or accept any responsibility for laws and ordinances from inbound transit. Vaddio will pay for outbound shipping, transportation, and insurance charges for all items under warranty but will not assume responsibility for loss and/or damage by the outbound freight carrier. If the return shipment appears damaged, retain the original boxes and packing material for inspection by the carrier. *Contact your carrier immediately.*

Products not under Warranty: Payment arrangements are required before outbound shipment for all out of warranty products.

Other General Information:

Care and Cleaning

Do not attempt to take this product apart at any time. There are no user-serviceable components inside.

- Do not spill liquids in the product
- Keep this device away from food and liquid
- For smears or smudges on the product, wipe with a clean, soft cloth
- Use a lens cleaner on the lens - really, only use a lens cleaner
- Do not use any abrasive chemicals.

Operating and Storage Conditions:

Do not store or operate the device under the following conditions:


- Temperatures above 40°C (104°F) or temperatures below 0°C (32°F)
- High humidity, condensing or wet environments
- In inclement weather
- In swimming pools or salmon farms
- Dry environments with an excess of static discharge
- In outer space (mostly gamma ray issues)
- Under severe vibration

APPENDIX 1: PIN-OUTS FOR ZOOMSHOT 20 CAMERA AND QUICK-CONNECT SR

Table: EZ-POWER VIDEO RJ-45 Connector Pin-outs

| Pin | Signal |
|-----|--------|
| 1 | Power+ |
| 2 | Power- |
| 3 | Y+ |
| 4 | PB+ |
| 5 | PB - |
| 6 | Y - |
| 7 | PR+ |
| 8 | PR- |

EZ-POWER VIDEO



Important Note: The EZ-POWER VIDEO RJ-45 Connector on a Vaddio CAT-5 system camera is for use with the Quick-Connect SR, Quick-Connect DVI/HDMI SR, Quick-Connect USB and USB Mini Interfaces ONLY (568B Wiring Standard). The video signals are differential (HSDS) and can only be processed by the interfaces above.

Table: ZoomSHOT 20 Camera RS-232 Port

| Pin # | Function |
|---------|----------------------------------|
| Pin - 1 | N/A |
| Pin - 2 | N/A |
| Pin - 3 | N/A |
| Pin - 4 | Not Used with QC-USB |
| Pin - 5 | Not Used with QC-USB |
| Pin - 6 | Digital GND |
| Pin - 7 | RXD (from TXD of control source) |
| Pin - 8 | TXD (to RXD of control source) |

RS-232





Table: Quick-Connect SR DE-15 Pin-Output (Analog Component YPbPr)

| Pin | YPbPr |
|-----|--------|
| 1 | Pr |
| 2 | Y |
| 3 | Pb |
| 4 | - |
| 5 | - |
| 6 | Pr GND |
| 7 | Y GND |
| 8 | Pb GND |
| 9 | - |
| 10 | GND |
| 11 | - |
| 12 | - |
| 13 | - |
| 14 | - |
| 15 | - |

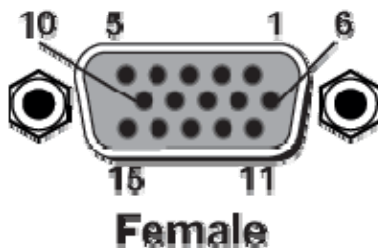

COMMUNICATION SPECIFICATION

Communication Speed: 9600 bps (default)


Start bit: 1

Stop bit: 1

Data bits: 8

Parity: None

No Flow control



| Pin # | RJ-45 RS-232 and IR Out Pins |
|-------|---|
| 1) | Unused |
| 2) | Unused |
| 3) | Unused |
| 4) | IR Output (Diff Signal to Quick-Connect SR) |
| 5) | IR Ground (Diff Signal to Quick-Connect SR) |
| 6) | GND (GND of IR Short Range - Pin 3) |
| 7) | RXD (from TXD of control source) |
| 8) | TXD (to RXD of control source) |

NOTE: The Vaddio ZoomSHOT 20 Control Protocol is similar, but not identical to, the Sony® VISCA™ command set in order to be compatible with several popular control devices. Not all VISCA commands are supported and there are many HD-Series specific commands in the following Command and Inquiry Lists.

ZoomSHOT 20 Command List (1/2)

| Command Set | Command | Command Packet | Comments |
|----------------|---|--|--|
| Address Set | Broadcast | 88 30 01 FF | Address Set (Daisy chain) |
| IF_Clear | Broadcast | 88 01 00 01 FF | IF Clear |
| Command Cancel | | 8x 2p FF | p:socket number(1,2) |
| CAM_Power | On Off(Standby) | 8x 01 04 00 02 FF 8x 01 04 00 03 FF | Power On/Off |
| CAM_Zoom | Stop Tele(Standard) Wide(Standard) Tele(Variable) Wide(Variable) Direct Direct(Variable) | 8x 01 04 07 00 FF 8x 01 04 07 02 FF 8x 01 04 07 03 FF 8x 01 04 07 2p FF 8x 01 04 07 3p FF 8x 01 04 47 0p 0q 0r 0s FF 8x 01 7E 01 4A 0v 0p 0q 0r 0s FF | pqrs: Zoom Position* v:(Speed) 0-7 |
| CAM_Focus | Stop Far(Standard) Near(Standard) Far(Variable) Near(Variable) AutoFocus ManualFocus Auto/Manual Direct | 8x 01 04 08 00 FF 8x 01 04 08 02 FF 8x 01 04 08 03 FF 8x 01 04 08 2p FF 8x 01 04 08 3p FF 8x 01 04 38 02 FF 8x 01 04 38 03 FF 8x 01 04 38 10 FF 8x 01 04 48 0p 0q 0r 0s FF | pqrs: Focus position* |
| CAM_WB | Auto Manual Indoor Outdoor One Push WB | 8x 01 04 35 00 FF 8x 01 04 35 05 FF 8x 01 04 35 01 FF 8x 01 04 35 02 FF 8x 01 04 35 03 FF | |
| CAM_RGain | Reset Up Down Direct | 8x 01 04 03 00 FF 8x 01 04 03 02 FF 8x 01 04 03 03 FF 8x 01 04 43 0p 0q 0r 0s FF | pqrs:00-0xffff |
| CAM_BGain | Reset Up Down Direct | 8x 01 04 04 00 FF 8x 01 04 04 02 FF 8x 01 04 04 03 FF 8x 01 04 44 43 0p 0q 0r 0s FF | pqrs:00-0xffff |
| CAM_AE | Full Auto Manual Shutter Priority Iris Priority | 8x 01 04 39 00 FF 8x 01 04 39 03 FF 8x 01 04 39 0A FF 8x 01 04 39 0B FF | Auto Exposure Mode Manual Control Mode Shutter Priority Mode Exposure Priority Mode (default) |
| CAM_Iris | Reset Up Down Direct | 8x 01 04 0B 00 FF 8x 01 04 0B 02 FF 8x 01 04 0B 03 FF 8x 01 04 4B 00 00 0p 0q FF | pq(0x00-0x08) |
| CAM_Gain | Reset Up Down Direct | 8x 01 04 0C 00 FF 8x 01 04 0C 02 FF 8x 01 04 0C 03 FF 8x 01 04 4C 00 00 0p 0q FF | pq(0x00-0x2A) |
| CAM_Bright | Reset Up Down Direct | 8x 01 04 0D 00 FF 8x 01 04 0D 02 FF 8x 01 04 0D 03 FF 8x 01 04 4D 00 00 0p 0q FF | pq(0x01-0x64) |

ZoomSHOT 20 Command List (2/2)

| Command Set | Command | Command Packet | Comments |
|-----------------------|--------------------------|----------------------------|-------------------------|
| CAM_Backlight | On | 8x 01 04 33 02 FF | |
| | Off | 8x 01 04 33 03 FF | |
| CAM_Aperture | Reset | 8x 01 04 02 00 FF | |
| | Up | 8x 01 04 02 02 FF | |
| | Down | 8x 01 04 02 03 FF | |
| | Direct | 8x 01 04 42 00 00 0p 0q FF | pq(0x00-0x1F) |
| CAM_Memory | Reset | 8x 01 04 3F 00 0p FF | |
| | Set | 8x 01 04 3F 01 0p FF | |
| | Recall | 8x01 04 3F 02 0p FF | p:Memory No(=0-0xF) |
| CAM_IDWrite | | 8x 01 04 22 0p 0q 0r 0s FF | pqrs:0x0000 – 0xFFFF |
| CAM_LR_Reverse On | On | 8x 01 04 61 02 FF | Mirror (Horizontal) on |
| | Off | 8x 01 04 61 03 FF | Mirror (Horizontal) off |
| IR_Receive## | On | 8x 01 06 08 02 FF | |
| | Off | 8x 01 06 08 03 FF | |
| | On/Off | 8x 01 06 08 10 FF | IR forwarding/Local IR |
| Tally | On | 8x 01 7E 01 0A 00 02 FF | |
| | Off | 8x 01 7E 01 0A 00 03 FF | |
| BLK.Enhance | Pedestal | No Support | No Support |
| GMA.Enhance | Gamma | 8x 01 7E 54 00 00 0p 0q FF | pq: Gamma (0x00-0x10) |
| CRM.Enhance | Chroma | 8x 01 7E 55 00 00 0p 0q FF | pq: Chroma (0x00-0x64) |
| KNE.Enhance | Knee | No Support | No Support |
| DIS.Enhance | Digital Image Stabilizer | 8x 01 7E 57 02 FF | On |
| | | 8x 01 7E 57 03 FF | Off |
| SNR.Enhance | Super Noise Reduction | 8x 01 7E 58 02 FF | On |
| | | 8x 01 7E 58 03 FF | Off |
| AGC.Enhance | AGC Mode | 8x 01 7E 59 00 FF | Off |
| | | 8x 01 7E 59 01 FF | Low |
| | | 8x 01 7E 59 02 FF | Medium |
| | | 8x 01 7E 59 03 FF | High |
| CAM_Shutter | Reset | 8x 01 04 0A 00 FF | |
| | Up | 8x 01 04 0A 02 FF | |
| | Down | 8x 01 04 0A 03 FF | |
| | Direct | 8x 01 04 4A 00 00 0p 0q FF | pq(0x00-0x1C) |
| CAM_ExpComp | On | 8x 01 04 3E 02 FF | AutoExposure Off |
| | Off | 8x 01 04 3E 03 FF | AutoExposure On |
| | Reset | 8x 01 04 0E 00 FF | |
| | Up | 8x 01 04 0E 02 FF | |
| | Down | 8x 01 04 0E 03 FF | |
| | Direct | 8x 01 04 4E 00 00 0p 0q FF | Pq: 0x00-0x2A |
| CAM_ICR Cut Filter | ICR On | 8x 01 04 01 02 FF | ICR On - Cut Filter Out |
| | ICR Off | 8x 01 04 01 03 FF | ICR Off - Cut Filter In |

*Zoom and Focus Data:

CAM_Zoom: Range(0x000–0x071A)

CAM_Focus: Range (0x0ed-0x0944) dependent on Zoom Position

ZoomSHOT 20 Inquiry List (1/1)

| Inquiry Command | Command | Response Packet | Comments |
|-----------------------|-------------------|---|--|
| CAM_PowerInq | 8x 09 04 00 FF | y0 50 02 FF y0 50 03 FF | On Off(Standby) |
| CAM_ZoomPosInq | 8x 09 04 47 FF | y0 50 0p 0q 0r 0s FF | pqr: 0-0x071A |
| CAM_FocusPosInq | 8x 09 04 48 FF | y0 50 0p 0q 0r 0s FF | pqrs: Focus Position |
| CAM_WBModelInq | 8x 09 04 35 FF | y0 50 00 FF y0 50 05 FF y0 50 01 FF y0 50 02 FF y0 50 03 FF | Auto Manual Indoor Outdoor One Push WB |
| CAM_RGain | 8x 09 04 43 FF | y0 50 0p 0q 0r 0s FF | pqrs: 000-0xffff |
| CAM_BGain | 8x 09 04 44 FF | y0 50 0p 0q 0r 0s FF | pqrs: 000-0xffff |
| CAM_Iris | 8x 09 04 4B FF | y0 50 00 00 0p 0q FF | pq(0x00-0x08) |
| CAM_Gain | 8x 09 04 4C FF | y0 50 00 00 0p 0q FF | pq(0x00-0x2A) |
| CAM_Bright | 8x 01 04 4D FF | y0 50 00 00 0p 0q FF | pq(0x01-0x64) |
| CAM_BacklightModelInq | 8x 09 04 33 FF | y0 50 02 FF y0 50 03 FF | On Off |
| CAM_ApertureInq | 8x 09 04 42 FF | y0 50 00 00 0p 0q FF | Pq:x00-0x1F |
| CAM_MemoryInq | 8x 09 04 3F FF | y0 50 0p FF | p: Preset 0-0xf |
| CAM_IDInq | 8x 09 04 3F FF | y0 50 0p 0q 0r 0s FF | pqrs: 0x0000 – 0xFFFF |
| CAM_ReceiveInq | 8x 09 06 08 FF | y0 50 02 FF y0 50 03 FF | On Off |
| CAM_LR_Reverse | 8x 09 04 61 FF | y0 50 02 FF y0 50 03 FF | On Off |
| TallyInq | 8x 09 7E 01 0A FF | y0 50 02 FF y0 50 03 FF | On Off |
| BLK.Enhance | No support | No Support | Pedestal |
| GMA.Enhance | 8x 09 7E 54 FF | y0 50 00 00 0p 0q FF | pq: Gamma (0x00-0x10) |
| CRM.Enhance | 8x 09 7E 55 FF | y0 50 00 00 0p 0q FF | pq: Chroma (0x00-0x64) |
| KNE.Enhance | No support | No Support | Knee |
| DIS.Enhance | 8x 09 7E 57 FF | y0 50 02 FF y0 50 03 FF | On Off |
| SNR.Enhance | 8x 09 7E 58 FF | y0 50 02 FF y0 50 03 FF | On Off |
| AGC.Enhance | 8x 09 7e 59 FF | y0 50 00 FF y0 50 01 FF y0 50 02 FF y0 50 03 FF y0 50 04 FF | Off Low Medium High Manual AGC |
| CAM_AEModelInq | 8x 09 04 39 FF | y0 50 00 FF y0 50 03 FF y0 50 0A FF y0 50 0B FF | Auto Exposure Mode Manual Control Mode Shutter Priority Mode Exposure Priority Mode |
| CAM_ShutterPosInq | 8x 09 04 4A FF | y0 50 00 00 0p 0q FF | pq: 0x0-0x1C |
| CAM_ExpCompModelInq | 8x 09 04 3E FF | y0 50 02 FF y0 50 03 FF | On - AE Mode Off Off – AE Mode On |
| CAM_ExpCompPosInq | 8x 09 04 4E FF | y0 50 00 00 0p 0q FF | pq: ExpComp Pos |
| CAM_ICRModelInq | 8x 09 04 01 FF | y0 50 02 FF y0 50 03 FF | On - ICR filter Out Off – ICR filter In |



Toll Free: 800-572-2011 ▪ Phone: 763-971-4400 ▪ FAX: 763-971-4464

www.vaddio.com