

Remote Control for DMTH4 Telephone Hybrid

- Control Connect/Disconnect Status
- Control Privacy Status
- Adjust Receive Volume Up and Down
- LED indicators display connection status
- Soft-touch switches
- Durable laser engraved nomenclature
- Machined aluminum housing
- Standard RJ-45 connector for CAT-5 cable


The RCW-TH4 provides the main operating controls for ASPEN and DM Series Telephone Hybrid Interfaces from a remote location via a CAT-5 cable. Soft touch switches and highly visible LEDs provide simple, intuitive operation and instant recognition of the status of the hybrid. The CONNECT LED blinks during volume control activity to verify operation.

The unit also serves as a diagnostic tool to quickly verify the operation of a DMTH4 telephone hybrid without a remote control system such as a touch panel. After the hybrid is installed, simply connect the RCW-TH4 to the rear panel jacks on the hybrid and operate the CONNECT and VOLUME controls and observe the LEDs next to the controls to verify proper operation. If a computer is connected to the DMTH4 and the software control panel is displayed, the indicators in the GUI will coincide with the remote control operation.




The RCW-TH4 is connected to the hybrid via the RJ-45 port. The wiring configuration has the following format:


- Pin 1: Ground
- Pin 2: Connect Button
- Pin 3: Privacy Button
- Pin 4: Volume Up Button
- Pin 5: Volume Down Button
- Pin 6: Privacy LED
- Pin 7: Connect LED
- Pin 8: Ground



- Controls:** Soft-touch switches
- Functions:**
- Connect/disconnect
 - Privacy on/off
 - Receive Volume Up
 - Receive Volume Down
- Connecting cable:** CAT 5
- Dimensions:** 2.8 x 4.6 x 1.3 inches including rubber feet
- Construction:** Machined aluminum housing
- Finish:** Electrostatic powder coating and anodize. Nomenclature is laser engraved for durability.

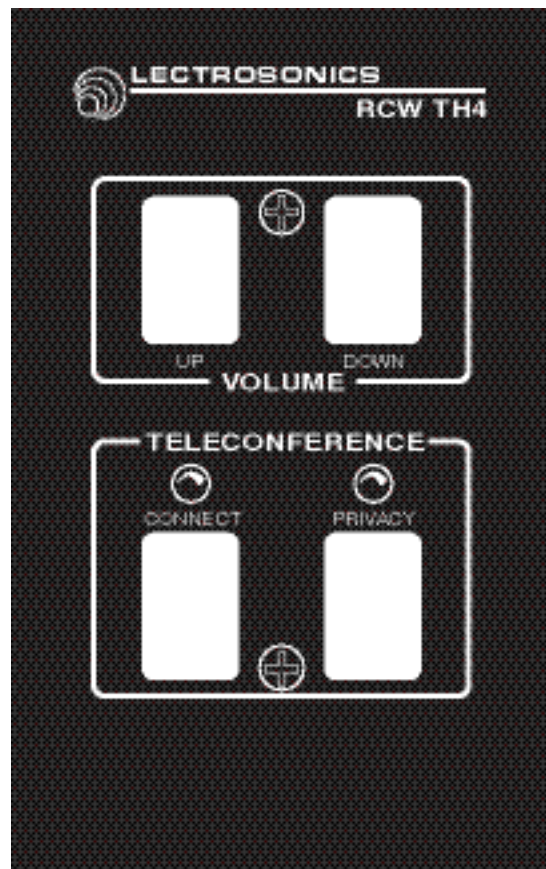

Actual Size

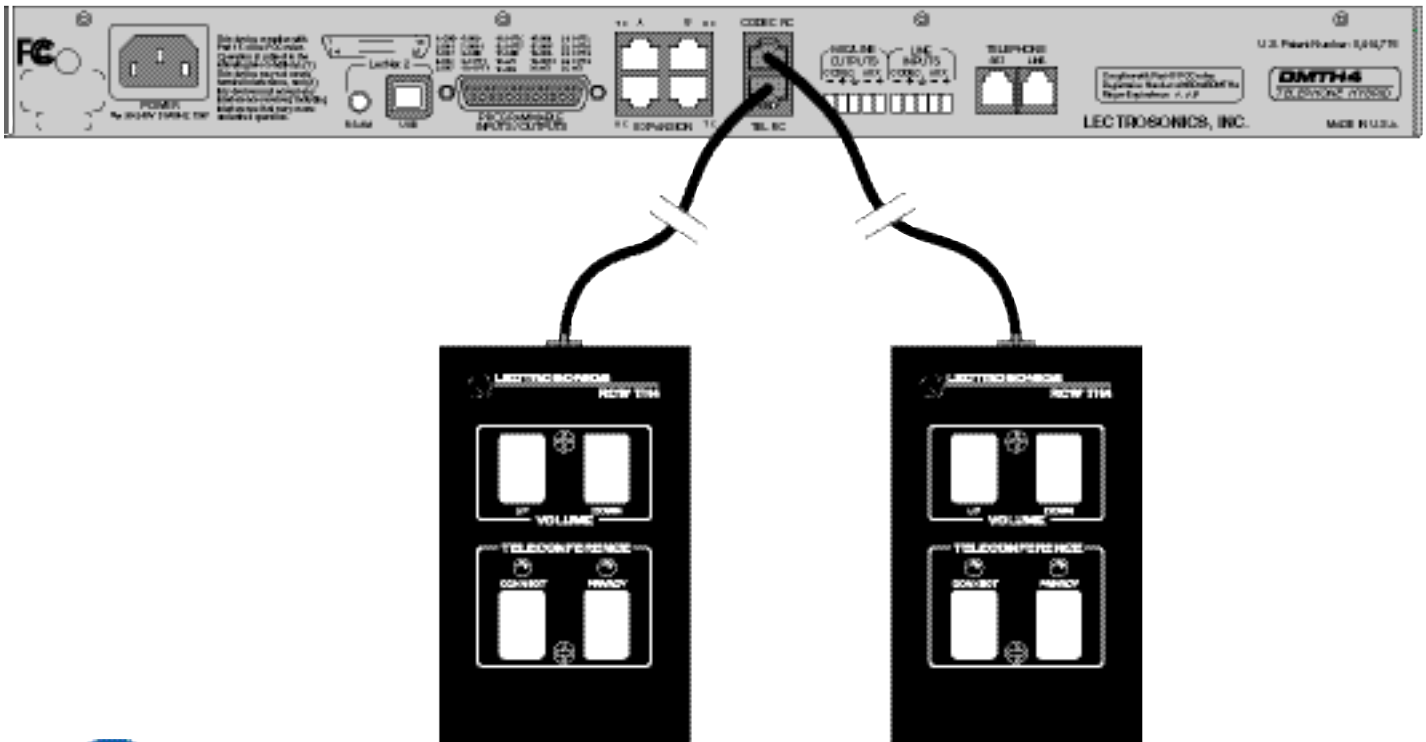

551 Laser Road NE • Flo Ranch, NM 87124 USA • www.lectrosonics.com
 (505) 882-4501 • (800) 821-1121 • fax (505) 882-8245 • sales@lectrosonics.com

February 15, 2006