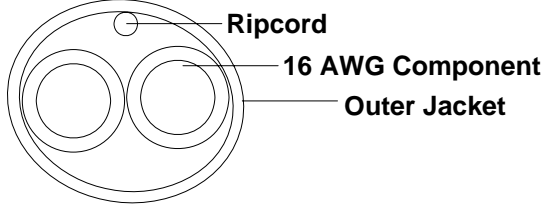
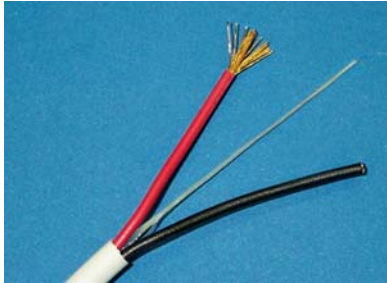


Product Specification Sheet

Catalog Number: 16-2C-TTP

Construction Detail	Product Illustration
 <p style="text-align: center;"> Ripcord 16 AWG Component Outer Jacket </p>	
Physical Construction	Description
<p>Component 1: 16 AWG 26/30 bare copper conductor PL-PVC Insulation: .008-inch nominal thickness</p>	<p>TTP™ (Tight Tube Plenum) Plenum rated wire for control and distributed audio applications in accordance with NEC article 725. TTP™ jacket is a thick smooth plenum PVC compound for roundness and ease of installation.</p>
	Color Code
	Black, Red
	Electrical Specifications
	<p>16 AWG: DCR: 4.0 Ω per 1000 feet Voltage: 300 Volts RMS Temperature: -6°C to 60°C</p>
	Regulatory Specifications
<p>Final assembly: 2 of component 1 twisted in a 3-inch lay Nylon Ripcord under the jacket. PL-PVC jacket: .018-inch nominal thickness Final construction: .192-inch nominal OD Product Print Legend: LWC 16-2C-TTP E190606 16 AWG TYPE CMP C(UL)US Sequential footmarks are applied in a conjunction with the print legend.</p>	<p>(UL) rated CMP C(UL) rated CMP</p>
Specification Control	Product Information
<p>Revision Date: 07/19/2005</p> <p>Liberty Wire & Cable specifications are subject to change without notice. Contact an account representative for current product specifications. Liberty Wire & Cable continuously strives to ensure product specifications are accurate and complete. All physical specifications are nominal.</p>	<p>Jacket Colors: Blue, White, Gray, Black</p> <p>Packaging: 1000 foot reels</p> <p>Special Instructions: Plenum wire should be conditioned for 24 hours at room temperature prior to installation and never installed below 0°C ambient temperature</p>

Form Revision Date: 04/15/2004