


NOTES:

1. DIN 1.0/2.3 FEED-THRU CONNECTOR SPECIFICATIONS:
 IMPEDANCE: 75 Ω
 FREQUENCY RANGE: 0-3 GHz
 W/S VOLTAGE: 250 Vrms
 INSULATION RESISTANCE: 1 GΩ min.
 CONTACT RESISTANCE: 30 mΩ max. (Initial)
 INSERTION LOSS: -1.0 dB max.
 RETURN LOSS: per SMPTE 424 M
 OPERATING TEMPERATURE: -40°C to +85°C
 LIFE: 500 cycles min.
2. MATERIALS:
 FRONT PANEL - ALUMINUM, ANODIZED
 INSERT - THERMOPLASTIC, BLACK
 CONNECTOR SHELL - COPPER ALLOY, NICKEL PLATED
 CONTACT: COPPER ALLOY, GOLD PLATED
 INSULATORS: THERMOPLASTIC
 HORIZONTAL MARKING STRIP - THERMOPLASTIC, WHITE
 DESIGNATION STRIP COVER - THERMOPLASTIC, CLEAR
 KEY-HOLE CLIPS - THERMOPLASTIC
 SCREWS - STEEL, ZINC OR NICKEL PLATED
3. SUPPLIED WITH (4) #12-24 MOUNTING SCREWS.
4. DIMENSIONS SHOWN FOR REFERENCE ONLY
5. THIS PRODUCT IS RoHS COMPLIANT

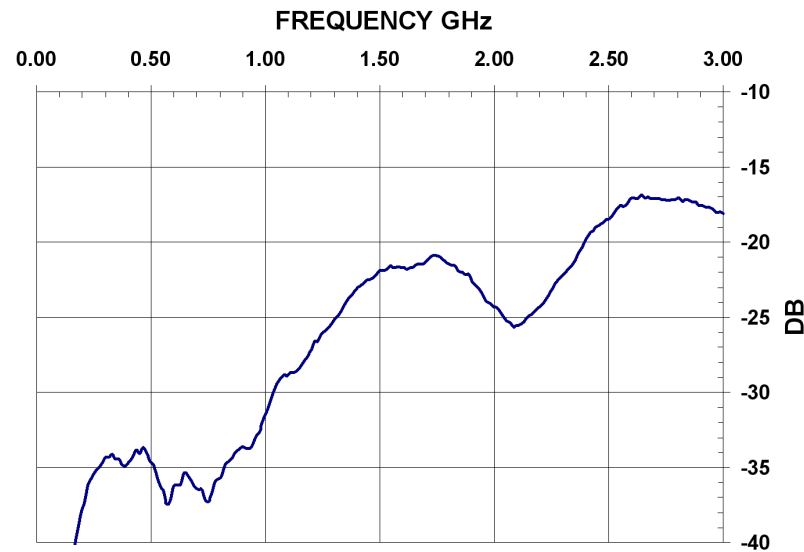

TYPICAL RETURN LOSS

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
					SIZE	WIDTH	MULT	LBS/M	TEMPER
					FINISH			MATERIAL	
					SPEC No.			SPEC No.	
					FIRST USED ON		SCALE		
							1:2		
DATE DRAWN		BY	CHKD		APVD				
5/17/10		PNK	PNK		SRC				
			5/17/10		5/17/10		SHEET 1 OF 1		
REV					NAME		PART No.		REV
ECO NUMBER					DIN 1.0/2.3 FEED-THRU PATCHBAY, RoHS		DIN96K1D		0B
DATE					DO NOT SCALE DRAWING				
BY					SolidWorks CAD File				
APVD									
REVISIONS									