



Output Transformer Rack Mount

OT-4240/ 4480/4960

Features

- OT-4240: 4Ω/60W
- OT-4480: 4Ω/120W
- OT-4960: 4Ω/240W
- Transforms Any Power Amplifier 4Ω Output to a 70V or 100V Level for Use with High Impedance Speakers
- Expansion Line Out for Additional OT-4240/4480/4960 Units
- Four Independent Channels Allow for Four Mono or Two Separate Stereo Zones
- Rack Mount



Description

The OT-4240/4480/4960 are 60, 120 or 240 watt high impedance transformers. They provide a professional way to install transformers in an equipment rack. The units transform the 4Ω output of any power amplifier to a 70V or 100V level for use with high impedance speakers (distributed systems). Input connectors are dual five-way binding posts for all four channels. Each unit provides an expansion output for use with additional OT-4240/4480/4960 units. Four independent channels are provided for four mono or two separate stereo zones. Each unit is rack mountable.

Technical Specifications

ELECTRICAL	OT-4240	OT-4480	OT-4960
Rated Output	70V(81.7Ω) or 100V(166.7Ω)	70V(40.8Ω) or 100V(83.3Ω)	70V(20.4Ω) or 100V(41.6Ω)
Input	4Ω/60W	4Ω/120W	4Ω/240W
Frequency Response	20Hz - 20kHz	20Hz - 20kHz	20Hz - 20kHz
GENERAL			
Weight	25.5lbs.	31.2lbs.	64.3lbs.
	9.5kg	13.5kg	24kg
Dimensions (W x H x D)	19" x 3.5" x 12.2"		19" x 5.2" x 12.2"
	482mm x 88mm x 310mm		482mm x 132mm x 310mm

OT-4240/4480/4960 Architects and Engineers Specifications

The output transformer shall be capable of 60W/OT-4240, 120W/OT-4480 or 240W/OT-4960 RMS output power. Each unit shall provide 70 or 100 volt outputs for use with high impedance speakers. Input connectors shall be dual five-way binding posts for all four input channels.

Each unit shall provide an expansion line out for use with additional output transformer units. Four independent channels shall be provided for four mono or two separate stereo zones.


The output transformer shall meet the following performance criteria:

Frequency response shall be from 20Hz to 20kHz.

The output transformer shall measure 19"(482 mm) wide x 3.5"(88mm) or 5.25"(132mm) high x 12.2"(310mm) deep and incorporate provisions for 19" rack mounting.

The output transformer shall be an Inter-M model OT-4240/4480/4960.

OT-4240/4480/4960 Front and Rear Views

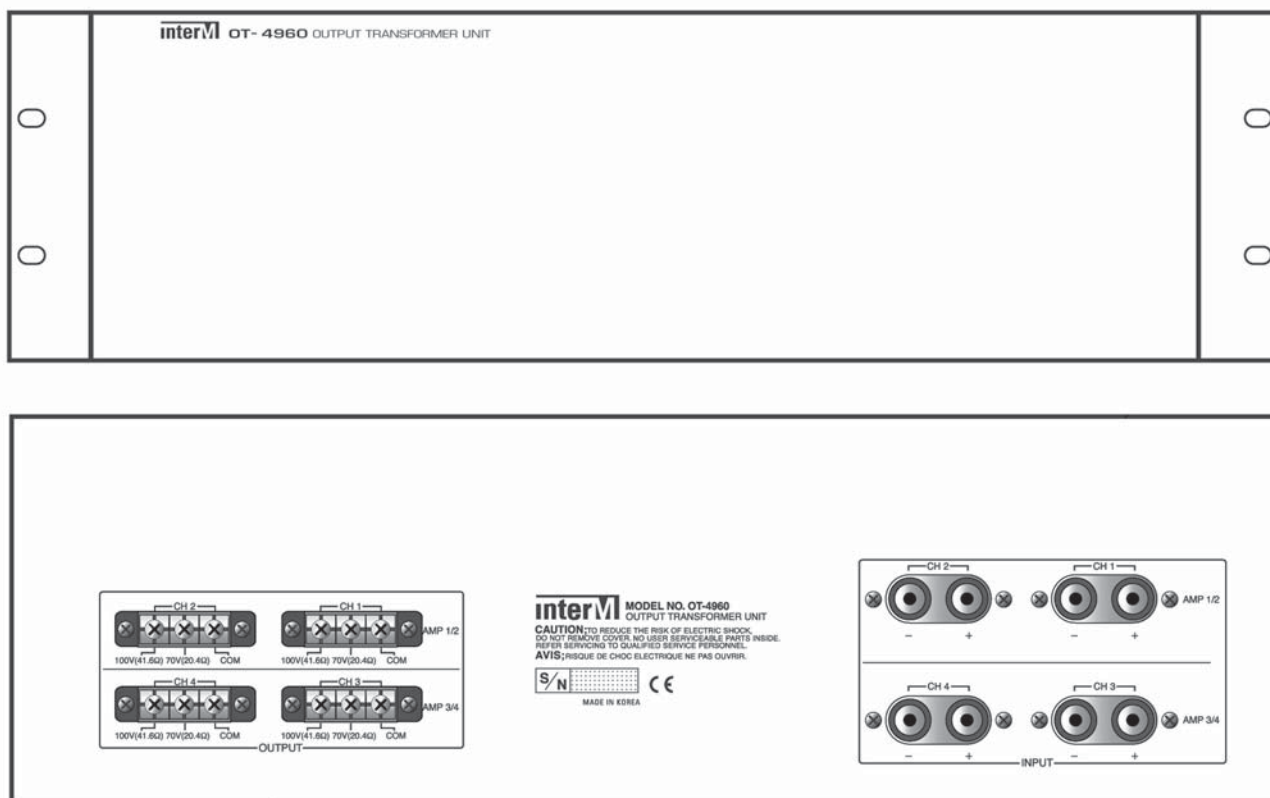

Inter-M Americas, Inc. • 1 E. Beacon Light Lane • Chester, PA 19013
Tel: 610-874-8870 • Fax: 610-874-8890 • E-mail: info@inter-m.net
Website: www.inter-m.net

Inter-M Corp. (Korea) • 653-5 Banghak-Dong • Dobong-Ku • Seoul • Korea
Tel: 82-2-2289-8140~8 • Fax: 82-2-2289-8149 • E-mail: export@inter-m.com
Website: www.inter-m.com