



# Copyette EH™

Series Cassette Duplication



*Your life moves fast. Why should your cassette duplicator slow you down? One of the best values in cassette duplication, the Copyette EH Series zips along as fast as you do. It provides the quality and reliability you demand, and the speed you need, all at the affordable price you want. The series offers one touch copying (tape rewinds to the beginning, copies, then rewinds again), erase heads (allows cassettes to be reused, saving you money), as well as the ability to copy both sides of up to three cassettes in mono or stereo at 16x normal speed. In addition, all Copyette EH duplicators include a track select feature, optical, non-reflective end-of-tape sensing system (for gentle tape handling), a carrying handle for portability, a removable power cord and a protective hard cover for storage. Pick up a Copyette EH Series Cassette Duplicator today and get back up to speed!*

See reverse side for complete specifications, or for more information, contact:  
Telex Communications, Inc., 9600 Aldrich Ave. So., Minneapolis, MN 55420; (800) 828-6107, ext. 498, (612) 887-7498.  
You can also reach us on the Internet at [www.telex.com](http://www.telex.com). Our e-mail address is: [multimedia@telex.com](mailto:multimedia@telex.com).

**TELEX®**

# Copyette EH™

Series Cassette Duplication

Erase Heads • 16x Normal Speed • Track Select  
One Touch Copying • Stereo or Mono • Gentle Tape Handling



- 1) **Start** – The Copyette EH™ start switch is the key to its simplicity. After inserting the cassettes, the operator simply presses this switch and the Copyette EH does the rest – rewinding all tapes back to the beginning, copying, then rewinding back to the beginning again.
- 2) **Side Select** – This feature allows the user to set up the unit to copy one side of a tape or both sides at once.
- 3) **Cycle** – Skip from the current phase of the rewind/copy/rewind cycle with one press of this button.

## Specifications

Copyette EH	1 • 2 • 1		1 • 2 • 3	
	Mono	Stereo	Mono	Stereo
Track Configuration	1/2 Track, 2 Channel	1/4 Track, 4 Channel	1/2 Track, 2 Channel	1/4 Track, 4 Channel
Frequency Response	50 Hz - 6.3 kHz	50 Hz - 8 kHz	50 Hz - 6.3 kHz	50 Hz - 8 kHz
Crosstalk Rejection, Typically at 1 kHz	50 dB or greater Channel 1-2	50 dB or greater Channel 2-3	50 dB or greater Channel 1-2	50 dB or greater Channel 2-3
Copy Speed (60 Hz) (50 Hz)	30 ips (76 cm/s) 25 ips (63 cm/s)		30 ips (76 cm/s) 30 ips (76 cm/s)	
Rewind (Approx. C-60) (60 Hz) (50 Hz)	70 ips (178 cm/s) 60 ips (152 cm/s)		70 ips (178 cm/s) 70 ips (178 cm/s)	
Equalization (EIA)	Type 1 (normal bias)		Type 1 (normal bias)	
Signal-to-noise ratio (A weighted)	48 dB		48 dB	
Erase Heads	Yes/Ferrite		Yes/Ferrite	
Distortion (Typically at nominal level)	Below 1% T.H.D.		Below 1% T.H.D.	
Flutter/Wow (RMS Weighted)	0.35% WRMS		0.35% WRMS	
Bias Oscillator	500 kHz		500 kHz	
Record Level (Typically at 1 kHz)	Within 2 dB of original		Within 2 dB of original	
Power Requirement (100 V) (120 V) (220 V) (240 V)	90-110 VAC 50/60 Hz 70 Watts Max 105-125 VAC 60 Hz 65 Watts Max 210-235 VAC 50 Hz 75 Watts Max 235-260 VAC 50 Hz 75 Watts Max		90-110 VAC 50/60 Hz 60 Watts Max 105-125 VAC 60 Hz 60 Watts Max 210-235 VAC 50/60 Hz 60 Watts Max 235-260 VAC 50/60 Hz 60 Watts Max	
Weight	10 lbs (4.5 kg)		14 lbs (6.3 kg)	
Head Warranty	90 Days		90 Days	
Unit Warranty	1 Year		1 Year	

Copyette EH 1•2•1




Produces one copy from a cassette master. Stereo (1/4 track) and Mono (1/2 track) versions

Copyette EH 1•2•3



Produces up to three copies from a cassette master. Features DC servo motors for unmatched reliability. Stereo (1/4 track) and Mono (1/2 track) versions

Copyette EH Dimensions

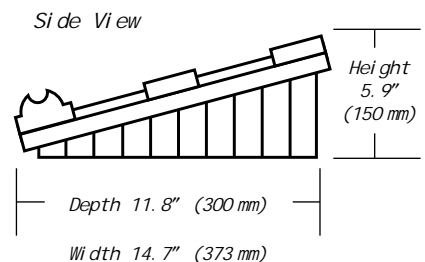

## TELEX®

TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave. So., Minneapolis, MN 55420 U.S.A.  
Telephone: (800) 828-6107, ext 498, (612)887-7498  
Fax: 612-884-0043  
E-mail: multimedia@telex.com  
Web: www.telex.com

U.K. Office  
Tel: +44 (0) 1908 690880  
Fax: +44 (0) 1908 694020

Australia Office  
Tel: +61 29 648 3455  
Fax: +61 29 648 5585

Canada Office  
Tel: 416-431-4975  
Fax: 416-431-4588

Germany Office  
Tel: +49 9421 706 392  
Fax: +49 9421 706 287

Hong Kong Office  
Tel: +852 2 351 3628  
Fax: +852 2 351 3329

Singapore Office  
Tel: +65 746 8760  
Fax: +65 746 1206