

QLIGHT™ SERIES ENGINEERING INFORMATION

The TQ-315 is a trapezoidal, switchable active/passive, full range two-way loudspeaker enclosure designed for use in mobile speech and music sound reinforcement applications as well as in a wide range of fixed installations.

The loudspeaker complement consists of a front loaded 15" low frequency driver and a 3" diaphragm high frequency compression driver on a 80°H x 50°V HF waveguide. The TQ-315 may be used either in bi-amped mode, or in fully passive mode by means of a rear panel switch.

The TQ-315 features Turbosound's Converging Elliptical Waveguide™ (CEW™). The comparatively short flare allows physical alignment of the HF and LF devices, and ensures that the wavefront is shaped smoothly, eliminating reflections in the throat area. Additionally this design does not suffer from the distortion typical of horns employing diffraction edges. The waveguide can be rotated within the enclosure, making it possible to swap the horizontal and vertical coverage patterns, for example when installing the TQ-315 horizontally.

The quasi-trapezoidal enclosure has been designed with a 15° side angle on one side, and with a 15° and 45° angle on the other. This shape allows the loudspeaker to be used for either front of house applications or as a floor monitor.



The TQ-315 includes the provision for fitting optional RT-767 ring-type fittings, two on the top and bottom and one on the rear, enabling it to be rigged in permanent installations as well as in mobile applications. A pole mount socket is fitted for use with 35mm poles and speaker stands. It is also compatible with Omnimount™ 300 series and Powerdrive™ 120 series wall and ceiling brackets. M10 rigging points are provided on the sides for installing in a horizontal orientation.

The cabinet is constructed from 15mm (5/8") birch plywood, screwed and glued together for maximum strength and rigidity, and it is finished as standard in durable semi-matt black textured paint. TurboBlue™ textured paint is optionally available. An acoustically transparent, reticulated foam and perforated steel mesh grille protects the drive units.

A rear panel connector plate carries two Neutrik Speakon NL4MP connectors for loop in and loop out connections to additional enclosures, and a recessed toggle switch for bi-amped/passive mode selection.

The TQ-315 must be used with professional quality digital controllers, such as the LMS-D4 or LMS-D6, providing two inputs and four outputs, with at least five parametric EQ points per output, and output limiting functions.

Recommended complementary products:

TQ-115, TQ-425 subwoofer enclosures

LMS-D6, LMS-D4 loudspeaker management systems

FEATURES

- CEW™ technology
- Trapezoidal cabinet
- Rotatable HF waveguide
- High power handling
- RT-767 flying points
- Pole mount socket
- Omnimount™ compatible
- Powerdrive™ compatible

APPLICATIONS

- Front of house
- Floor monitor
- Theatre
- Houses of Worship
- Corporate / industrial

DIMENSIONS (HxWxD)	691mm x 443mm x 381mm (27.2" x 17.4" x 15")	
NET WEIGHT	35.5 kg (78.1 lbs)	
COMPONENTS	1 x 15" (381mm) LF driver, 1 x 3" (76mm) diaphragm HF driver on an Converging Elliptical Waveguide™	
FREQUENCY RESPONSE¹	55Hz - 20kHz ±4dB	
NOMINAL DISPERSION²	80°H x 50°V@-6db points. Rotatable waveguide allows swap of horizontal and vertical pattern	
POWER HANDLING	Passive: 680 watts r.m.s., 1360 watts program, 1700 watts peak Recommended amplifier 1360 watts @ 8 ohms Bi-amp: LF 600 watts r.m.s., 1200 watts program, 1500 watts peak HF 80 watts r.m.s., 160 watts program, 200 watts peak	
SENSITIVITY³	99dB 1 watt @ 1 m	
MAXIMUM SPL	130dB continuous ⁴ , 136dB peak ⁵	
CROSSOVER	Configurable for passive/bi-amp operation with integral rear panel switch. Internal passive crossover at 1k58Hz, 12dB/octave Butterworth	
RECOMMENDED CONTROLLERS	Turbosound LMS-D4 Turbosound LMS-D6 BSS Minidrive FDS344	
NOMINAL IMPEDANCE	Passive: 8 ohms, Bi-amp LF: 8 ohms, HF: 8 ohms	
CONSTRUCTION	15mm (5/8") birch plywood; rebated, screwed and glued. Finished in black semi-matt textured paint. Three recessed carrying handles. Integral pole mount socket	
GRILLE	Powder coated perforated steel with acoustically transparent reticulated foam	
CONNECTORS	(2) Neutrik Speakon NL4MP, wired (passive mode) pin1+: positive, pin1-: negative (active mode) pin1+: LF positive, pin1-: LF negative, pin2+: HF positive, pin2-: HF negative	
FLYING HARDWARE	RT-767 ring type flypoints on the top (2), bottom (2) and back (1) M8 rigging points for Omnidrive 300 series and Powerdrive 120 series mounting brackets M10 rigging points for M10 shoulder eyebolts	
OPTIONS	Optional colour: TurboBlue™ textured paint	
SPARES AND ACCESSORIES	LS-1520	15" (381mm) LF loudspeaker
	RC-1520	Recone kit for LS-1520
	CD-208	3" diaphragm (76mm) HF compression driver
	RD-208	Replacement diaphragm for CD-208
	PX-315	Crossover assembly
	MG-315	Replacement grille
	RT-767	Ring-type flying points

Notes

¹Measured on axis


²Average over stated bandwidth

³Average over stated bandwidth


⁴Unweighted diode-clipped pink noise. Measured in a half space environment

⁵Verified by subjective listening tests of familiar program material, before the onset of perceived signal degradation

FREQUENCY RESPONSE

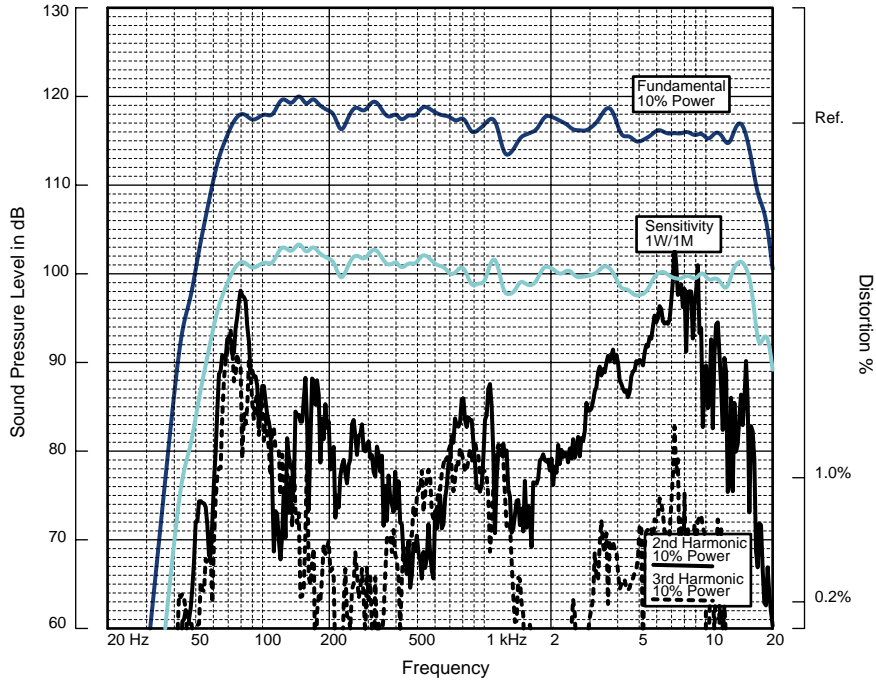


IMPEDANCE

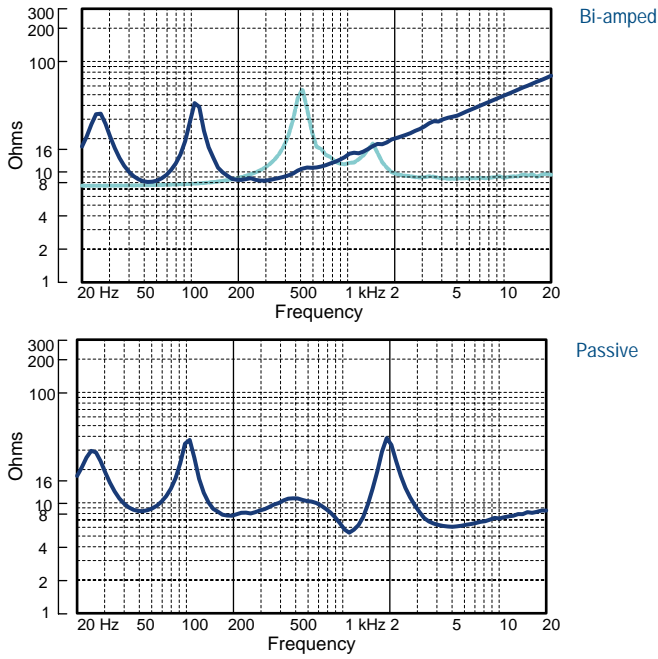







Impedance A constant current circuit was used to measure the impedance. **Frequency response** The frequency response shown was obtained by feeding a swept sine wave through the system in a full space environment. The position of the microphone was vertically on-axis at a distance of 2 metres, then scaled to represent 1 metre. **2nd & 3rd Harmonic Distortion** Distortion measurements were obtained using an Audio Precision harmonic distortion analysis system and comply with AES recommendations for enclosure measurement (AES paper ANSI S4-26-1984). **Data Conversion** All graphs were digitally generated using the APEX custom software system, designed to translate data derived from Audio Precision 'System One' test equipment into AutoCAD™. This program enables graphical information to be plotted to a high degree of accuracy.

NOTES ON MEASUREMENT CONDITIONS


HORIZONTAL THIRD
OCTAVE POLARS

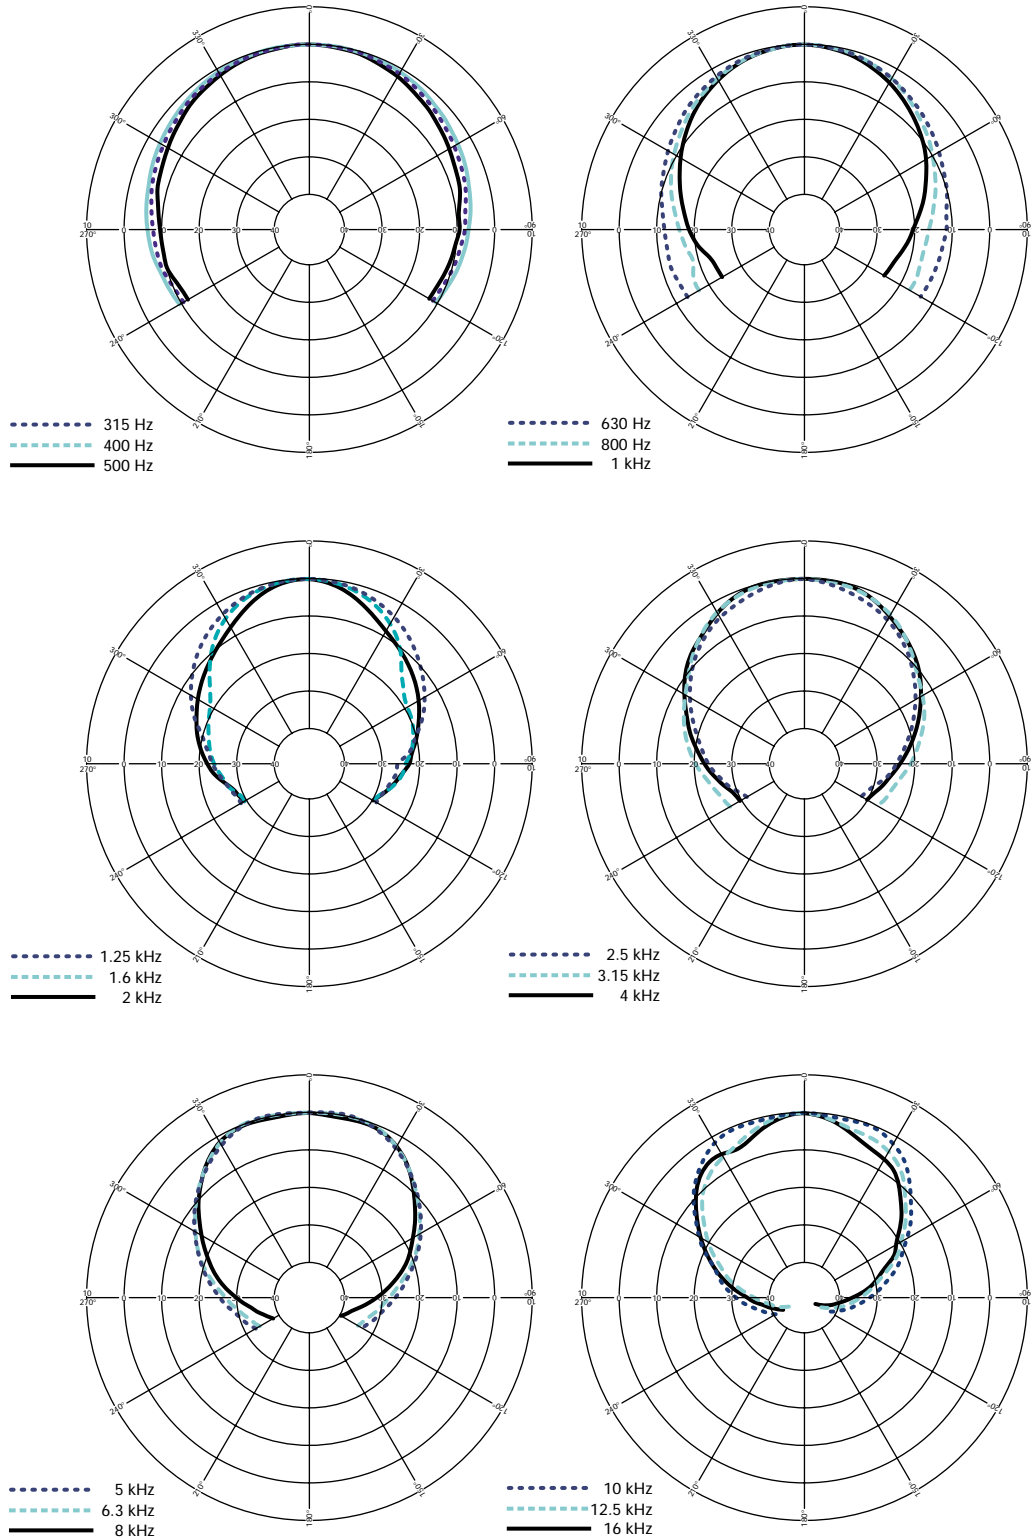

VERTICAL THIRD
OCTAVE POLARS

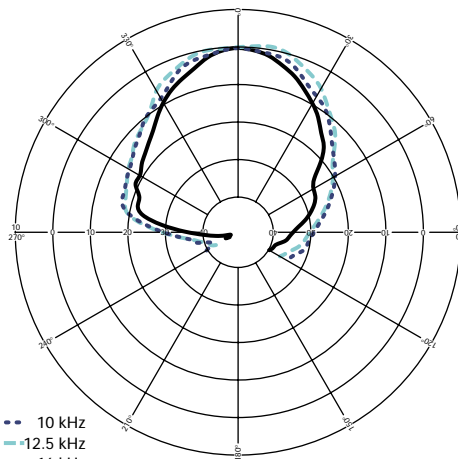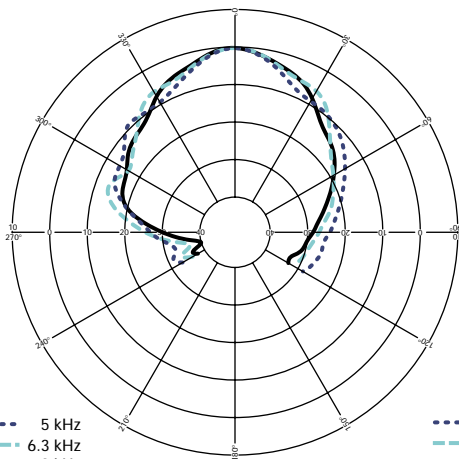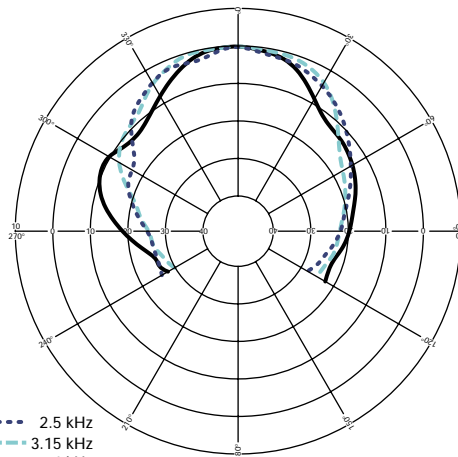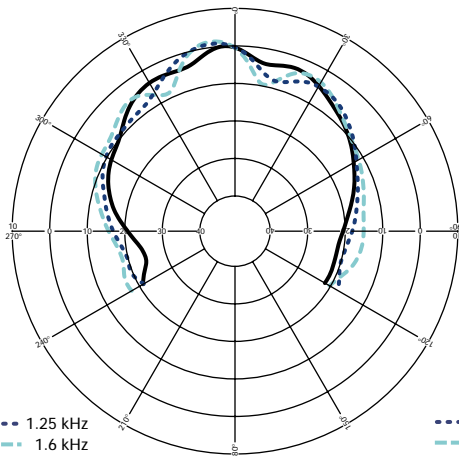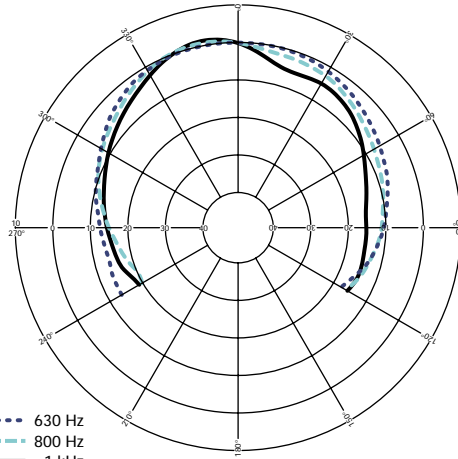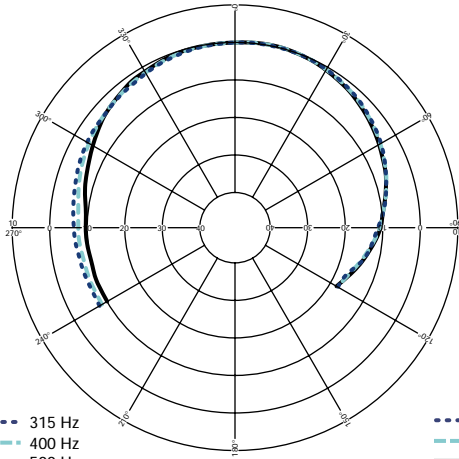

BEAMWIDTH

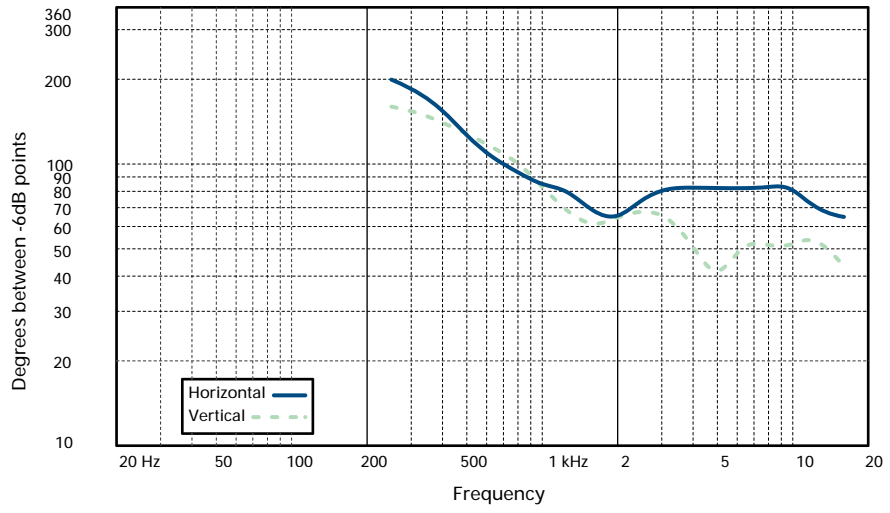


The enclosure is fitted with rigging points on the top and rear of the cabinet for use with optional RT-767 ring type flying points, enabling it to be rigged in permanent installations and for mobile applications. The rear RT-767 rigging point provides a means of adjusting the downward angle of the cabinet.

M10 rigging points are provided on each side to allow the enclosure to be flown horizontally using the rear RT-767 point as a pull-back.

M8 rigging points are provided on the rear of the cabinet for use with Omnidrive 300 series and Powerdrive 120 series wall and ceiling brackets.

**INSTALLATION AND
FLYING HARDWARE**

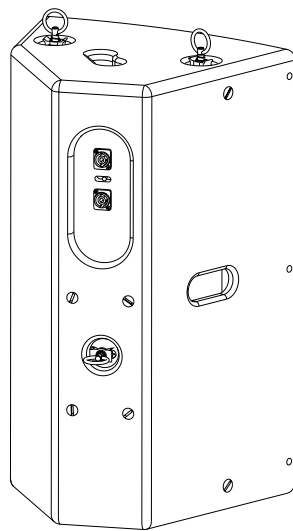

RT-767 ring type
flypoints

**ARCHITECTURAL
& ENGINEER'S
SPECIFICATIONS**

The system shall be of the two-way switchable active/passive trapezoidal type consisting of one 15" (381mm) low frequency loudspeaker and one 3" (35mm) diaphragm high frequency driver on a rotatable 80° x 50° Converging Elliptical Waveguide™. Performance specifications of a typical production unit when used with a recommended digital crossover shall meet or exceed the following: frequency response, measured with swept sine wave input, shall be flat within ±4dB from 55Hz to 20kHz. Nominal dispersion, at -6dB points, shall average 80°H x 50°V. Nominal impedance shall be passive: 8 ohms; bi-amp LF: 8 ohms, HF: 8 ohms. Power handling shall be passive: 680 watts r.m.s., 1360 watts program, 1700 watts peak; bi-amp LF: 600 watts r.m.s., 1200 watts program, 1500 watts peak, HF: 80 watts r.m.s., 160 watts program, 200 watts peak. Sensitivity, measured with 1 watt input at 1 metre distance on axis, mean averaged over stated bandwidth, shall be 99dB. Maximum SPL (peak) measured with music program at stated amplifier input shall be 136dB. Dimensions: 691mmH x 443mmW x 381mmD (27.2"H x 17.4"W x 15"D). Weight: 35.5 kg (78.1lbs). The loudspeaker system shall be the Turbosound TQ-315. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verify that the above combined performance / size specifications are equalled or exceeded.

DIMENSIONS

