


IF 501 Control Interface

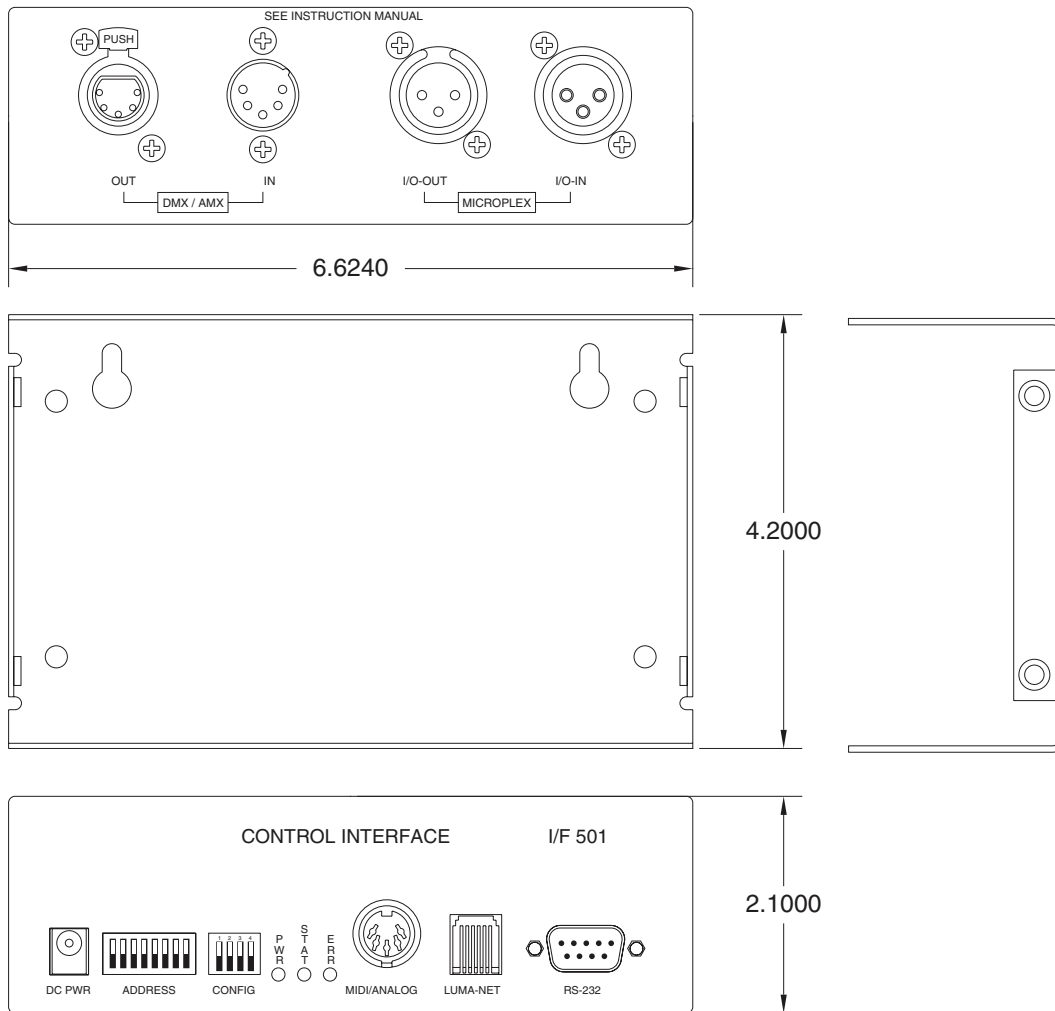

The Leviton-NSI IF 501 Control Interface is your simple solution for dimmer and control systems compatibility. Increased flexibility of control system design is achieved with the multiple signal ports and protocols available with the IF 501. The IF 501 may be configured to combine and convert analog, analog multi-plex and digital control signals.

In addition to interfacing a variety of control signals, the IF 501 is programmable as a stand-alone auto sequence control device. Eight preprogrammed crossfading chase effects with step times from 1 to 60 seconds may be selected. A precision 20 cue sequence with fade and wait times from .1 second to 50 minutes may be programmed into the non-volatile memory via the RS-232 port and triggered remotely.

DIMENSIONAL DATA - IN. [CM] LBS. [KG]	
Width	6.62 [16.81]
Depth	4.2 [10.67]
Height	2.1 [5.33]
Shipping Weight	4 [1.82]

CONVERSION CAPABILITIES

- Micro-plex converts to DMX512
- Micro-plex converts to AMX192
- DMX512 converts to Micro-Plex
- DMX512 converts to AMX192
- MIDI converts to Micro-Plex
- MIDI converts to DMX512
- MIDI converts to AMX192
- RS-232 converts to Micro-Plex
- RS-232 converts to DMX512
- RS-232 converts to AMX192
- 4 Channels 0-10V Analog converts to Micro-Plex
- 4 Channels 0-10V Analog converts to DMX512
- 4 Channels 0-10V Analog converts to AMX192

COMBINE AND CONVERT CAPABILITIES

- Micro-Plex and Luma-Net® convert to Micro-Plex
- Micro-Plex and Luma-Net® convert to DMX512
- Micro-Plex and Luma-Net® convert to AMX192
- DMX512 and Luma-Net convert to Micro-Plex
- DMX512 and Luma-Net convert to DMX512
- DMX512 and Luma-Net convert to AMX192
- Micro-Plex or DMX512 and 4 Channels 0-10V convert to Micro-Plex
- Micro-Plex or DMX512 and 4 Channels 0-10V convert to DMX512
- Micro-Plex or DMX512 and 4 Channels 0-10V convert to AMX192

FEATURES

- 8 Pre-programmed auto sequence chases for stand-alone operation
- Programmable 20 cue sequence ASCII text files control 16 channels for stand-alone operation
- Interface between a computer and the Luma-Net network for programming Luma-Net stations
- Trigger Luma-Net pre-sets with external contact closures

PORTS

- Micro-Plex in (3 pin XLR male)
- Micro-Plex out (3 pin XLR female)
- DMX512 in (5 pin XLR male)
- DMX512 out (5 pin XLR female)
- Optional AMX192 out (4 pin XLR male)
- RS-232 (9 pin D-Sub/DB9 male)
- MIDI in/0-10V analog in (5 pin DIN, 180 degree)
- Luma-Net (RJ14)

CAT. NO.	DESCRIPTION
N0501-000	Protocol Converter and Auto Sequence Control Device. DMX512, LUMA-NET, RS232, MIDI & 0-10V
N0501-001	Protocol Converter and Auto Sequence Control Device. CMX to DMX
N0501-002	Protocol Converter and Auto Sequence Control Device. MPX/DMX to CMX
N0501-003	Protocol Converter and Auto Sequence Control Device. AMX to DMX
N0501-004	Protocol Converter and Auto Sequence Control Device. AMX Output Only

LEVITON SPECIFICATION SUBMITTAL	
JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc. Lighting Management Systems

20497 SW Teton Avenue, Portland, OR 97062
 Telephone: 1-800-736-6682 • FAX: 503-404-5594 • Tech Line (6:00AM-4:00PM P.S.T. Monday-Friday): 1-800-959-6004

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • FAX: (+52) 5386-1797 • www.leviton.com.mx

Visit our Website at: www.leviton.com/lms