

ATEM Mini Pro



ATEM Mini Pro is fast to set up and easy to use. It includes 4 standards converted HDMI inputs, USB webcam out, HDMI out, Fairlight audio mixer with EQ and dynamics, DVE for picture in picture, transition effects, green screen chroma key, 20 stills media pool for titles and free ATEM Software Control. ATEM Mini Pro also includes direct recording to USB flash disks in H.264 and direct streaming via Ethernet to YouTube Live and more. There's also a multiview with 4 cameras, media, preview and program plus status of recording, streaming and audio.

\$595

Connections

Total Video Inputs

4

Total Outputs

2

Total Aux Outputs

1

Total Audio Inputs

2 x 3.5mm stereo mini jack.

Total Audio Outputs

None, embedded audio only.

Timecode Connection

None

HDMI Video Inputs

4 x HDMI type A, 10-bit HD switchable.

2 channel embedded audio.

Video Input Re-Sync

On all 4 HDMI inputs.

Frame Rate and Format Converters

On all 4 HDMI inputs.

HDMI Program Outputs


1

Ethernet

Ethernet supports 10/100/1000 BaseT for live streaming, software control, software updates and direct or network panel connection.

Computer Interface

1 x USB Type-C 3.1 Gen 1 for external drive recording, webcam out, software control, software updates and panel connection.

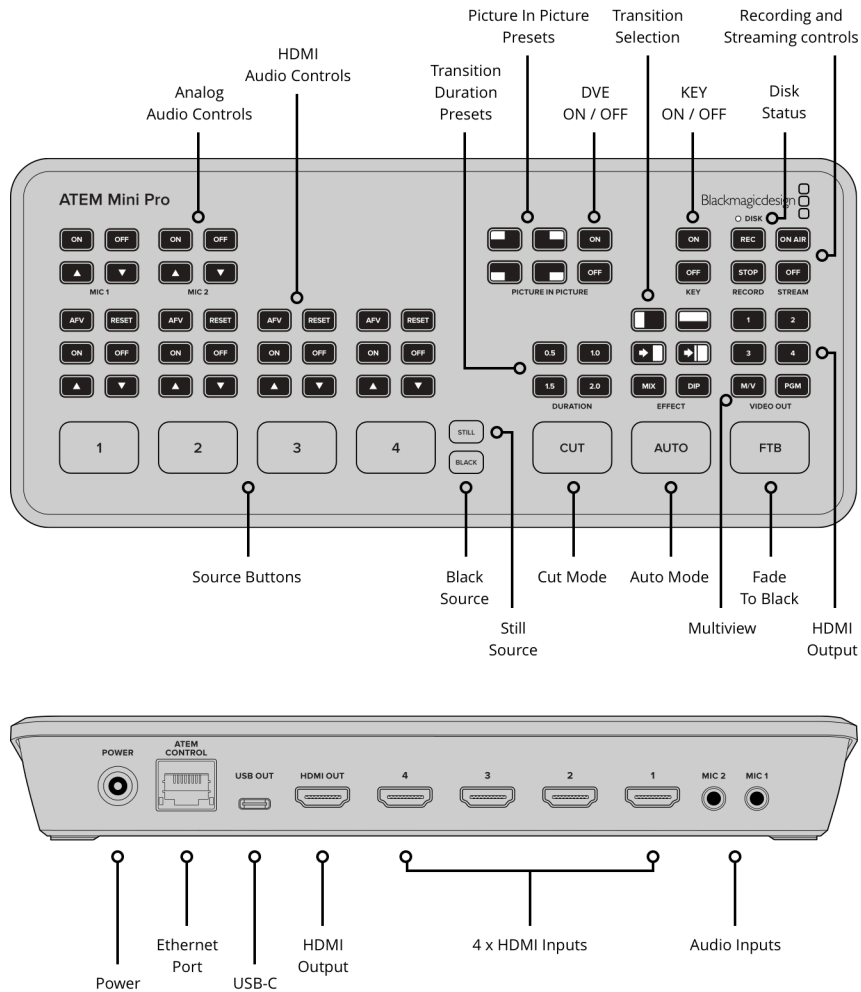

Standards

HD Video Input Standards

720p50, 720p59.94, 720p60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080i50, 1080i59.94, 1080i60

HD Video Output Standards

1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60

Ultra HD Video Standards

None

Video Sampling

4:2:2 YUV

Color Precision

10-bit

Color Space

Rec 709

HDMI Input Resolutions from Computers

1280 x 720p 50Hz, 59.94Hz and 60Hz
 1920 x 1080p 23.98, 24, 25, 29.97,30,
 50, 59.94 and 60Hz
 1920 x1080i 50 and 59.94Hz 60Hz

Colorspace Conversion

Hardware based real time.

Audio Mixer

6 input x 2 channel mixer.
 Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel.
 Level and Peak metering. Plus new Fairlight audio enhancements:
 Compressor, Gate, Limiter, 6 bands of parametric EQ. Master gain control.

Product Specifics

Upstream Keyers

1

Transition Keyer

DVE only.

DVE with Borders and Drop Shadow

1

Downstream Keyers

1

Total Number of Layers

5

Interface

Minimum monitor resolution of 1366 x 768.

Advanced Chroma Keyers

1

Pattern Generators

1

Linear/Luma Keyers

2

Color Generators

2

Streaming

Direct Streaming

ATEM Mini Pro supports direct live streaming over ethernet using Real Time Messaging Protocol (RTMP).

Recording

Direct Recording

1 x USB-C 3.1 Gen 1 expansion port for external media to direct record a .mp4 H.264 with AAC audio at the ATEM video standard.

Media Format

Can format media to ExFAT (Windows/Mac) or HFS+ (Mac) file systems.

Multi View Monitoring

Multi View Monitoring

1 x 10 Views including left right configurable Program/Preview, 4 HDMI inputs, Media Player, Streaming Status, Recording Status and Audio Meters.

Multi View Video Standard

HD

Media Player

Media Players

1

Media Pool Still Image Capacity

20 with fill and key.

Channels

Fill and key for each Media Player.

Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

Control

Control Panel

Built in control panel. Software control panel with camera control included. Supports optional hardware panel.

Control Panel Connection

Ethernet supports 10/100/1000 BaseT. Ethernet used for direct connection between panel and chassis or via network. ATEM Mini Pro also supports direct USB-C connection. Ethernet or USB-C used for updating the software.

Control Panel Compatibility

Includes ATEM Software Control Panel. Also compatible with ATEM 1 M/E Advanced Panel and ATEM 2 M/E Broadcast Panel.

Control Panel Included

ATEM Software Control Panel included free for Mac 10.14 Mojave, Mac 10.15 Catalina or later and Windows 10 64 bit only.

Software


Software Updates

Using USB or Ethernet connection directly connected to Mac OS X or Windows computers. Includes ATEM Switcher Utility.

Configuration

Set via ATEM Software Control Panel, excluding ATEM chassis IP address which is set via the ATEM Switcher Utility connected via USB to chassis.

Operating Systems



Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 10 64 bit only.

Power Requirements


Power Supply

1 x External 12V power supply.

Power Usage

36W

Physical Specifications

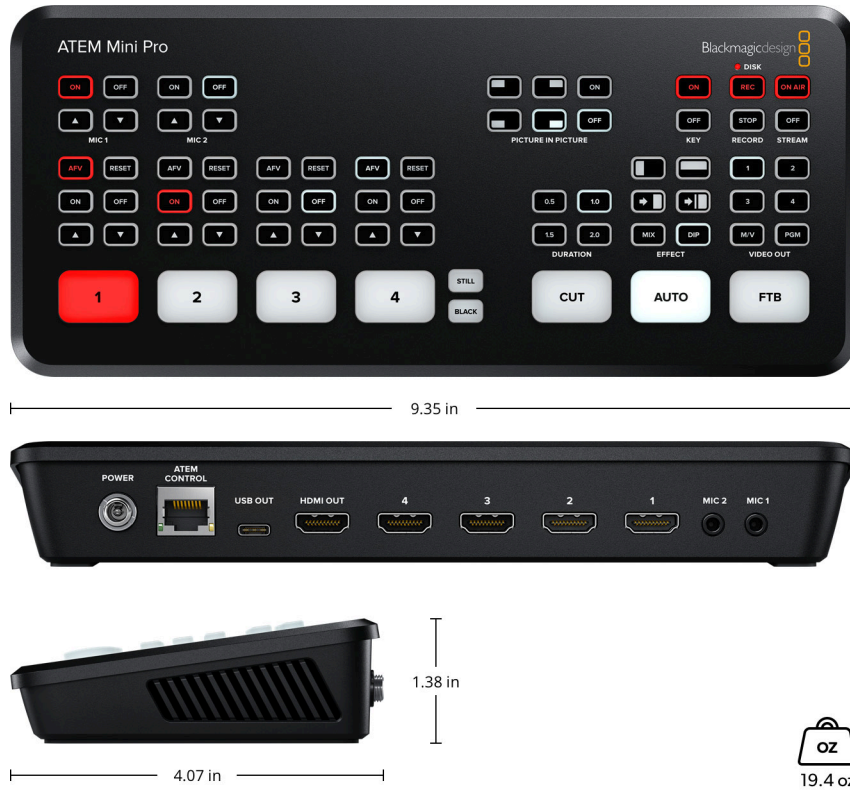

Environmental Specifications

Operating Temperature
5° C to 40° C (41° - 104° F)

Storage Temperature
-10° to 60° C (14° to 140° F)

Relative Humidity
0% to 90% non-condensing

What's Included

ATEM Mini Pro
External 12V DC power supply with international socket adapters

Warranty

12 Months Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved.
All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller