



# SINGLE MOTOR LOW VOLTAGE CONTROL (LVC)


## SPECIFICATION DATA

DA-LITE SCREEN COMPANY, INC.  
3100 North Detroit Street  
Post Office Box 137  
Warsaw, Indiana 46581-0137  
Phone: 574-267-8101  
800-622-3737  
Fax: 574-267-7804  
www.da-lite.com  
e-mail: info@da-lite.com

**SUGGESTED SPECIFICATIONS:** Electrical rating 115 VAC 60 Hz 5A. The single motor LVC is used to operate Da-Lite single motor electric screens from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary, dry contact switch. Any combination of single or multiple 3-button switches, optional radio frequency remote or infrared remote, or a control panel with momentary dry contacts may control the LVC. Control board to be mounted in a galvanized steel housing measuring 2<sup>1</sup>/<sub>4</sub>" H x 4<sup>1</sup>/<sub>2</sub>" W x 10<sup>1</sup>/<sub>2</sub>" L. Standard knockouts provided on housing for 1/2" conduit connections. Control to be listed by Underwriter's Laboratories.



**NOTE:** This control cannot be used with the Horizon Electrol<sup>®</sup>, Ascender<sup>®</sup> Electrol<sup>®</sup>, or Motorized Scenic Roller screens.

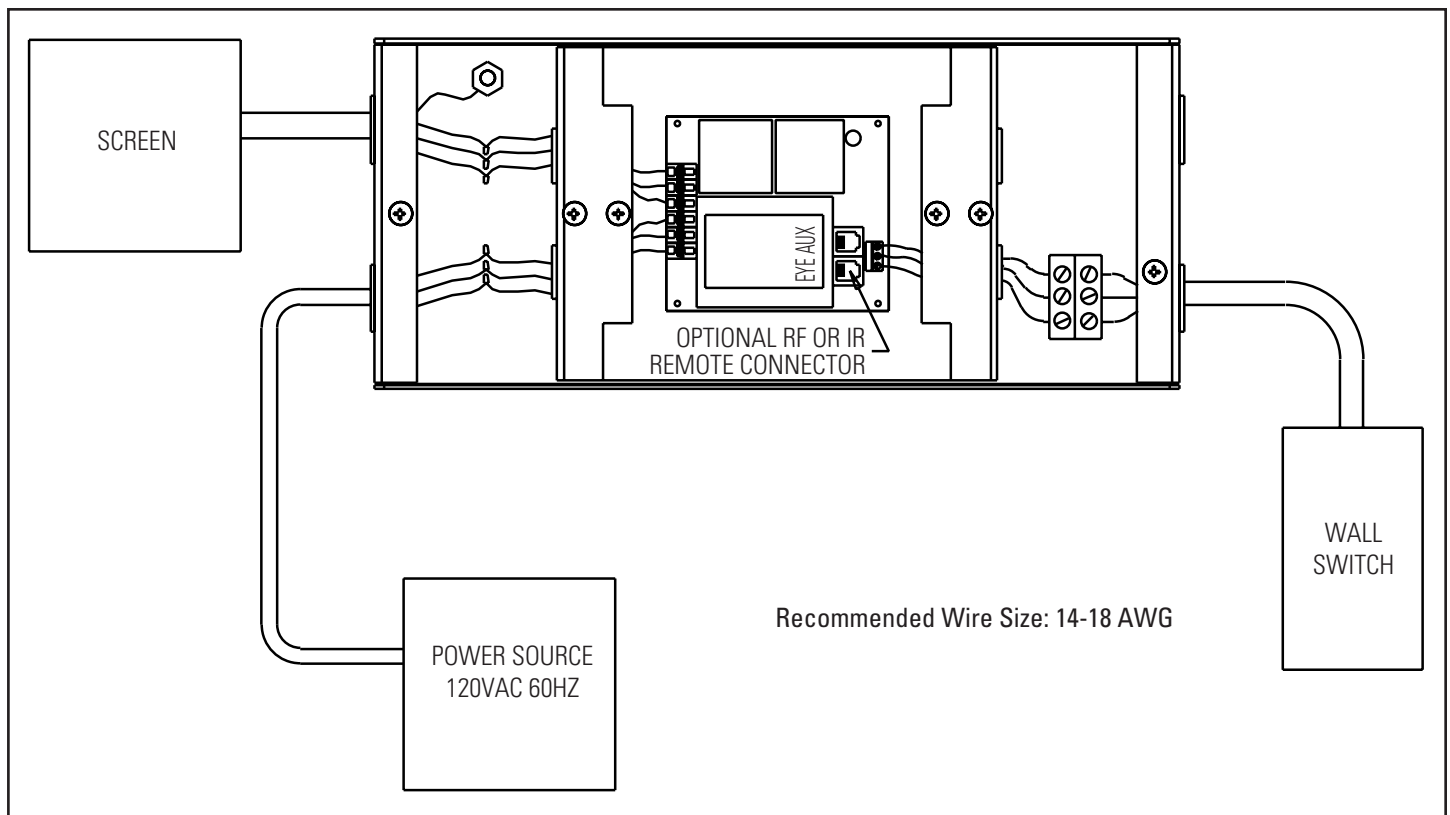

**NOTE:** Do not seal in – allow access.

**Options:**

- Radio Frequency Remote Control.
- Infrared Remote Control.
- Additional 3-button Wall Switch.
- 240V Model Available.
- Key Locking Cover Plate for 120V or Low Voltage Control (LVC).

Specifications are subject to change without notice.

Project: \_\_\_\_\_  
 \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Supervisor: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Revised: \_\_\_\_\_