



USER'S MANUAL



www.pyleaudio.com




USER'S MANUAL



- PPHP84, PPHP86A, PPHP124, PPHP126A, PPHP127AI, PPHP104, PPHP106A, PPHP154, PPHP156A, PPHP157AI

www.pyleaudio.com

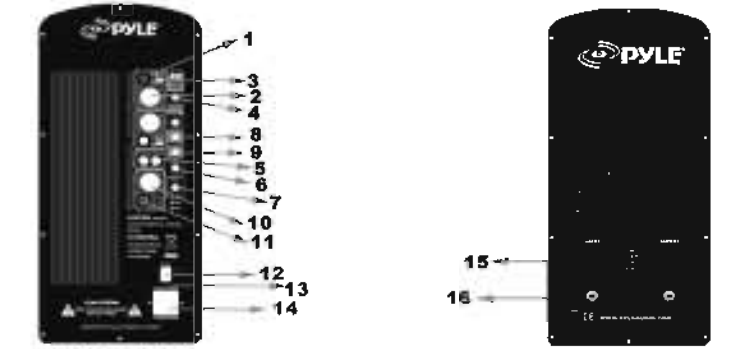

- 1) Microphone Input, 2) Balanced Microphone Input, 3) Mic/Line Input button, 4) Microphone Control, 5) RCS Line-in, 6) Line-in signal volume control, 7) Volume Control, 8) Treble, 9) Bass, 10) Signal output, 11) Signal output, 12) On/Off Power Switch, 13) AC 115V/230V Voltage Selectable, 14) AC power, 15) Speaker Input/Output, 16) 1/4" Jack Input/Output

Pyle Audio-www.pyleaudio.com-Instruction Manual Page 5

FEATURES:

- PPHP127AI 12" 1200 Watt Powered 2 Way Full Range PA Speaker w/Built-in iPod Dock. Features include 12" Subwoofer, Power Switch and Digital Amplifier, Built-in iPod Docking Station, 1.34" Titanium Compression Driver, XLR and 1/4" Mic Inputs, XLR Stereo RCA Line Input, XLR and 1/4" Line Outputs, Volume, Bass Treble Controls, 2-Way, 2-Speaker Professional speaker, High Efficiency Mid-Low Woofer, 35mm Titanium Dome Horn Driver, PTC Driver Protect, Power Output: 600 Watts RMS, Impedance: 8 Ohm ±20%, Sensitivity: 101±3dB, Frequency Response: 50Hz-20 KHz (-3dB), Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover Frequency: 3.5K Hz, 35mm Speaker Stand Mount.

- PPHP157AI: 15" 1400 Watt Portable Powered 2 Way Full Range PA Speaker w/Built-in iPod Dock. Features include 15" Subwoofer, Built-in iPod Dock, Power Switch and Digital Amplifier, 1.75" Titanium Compression Driver, XLR and 1/4" Mic Inputs, XLR Stereo RCA Line Input, XLR and 1/4" Line Outputs, Master Volume, Bass Treble Controls, High Efficiency Mid-Low Woofer, 35mm Titanium Dome Horn Driver, PTC Driver Protect, Power Output: 700 Watts RMS, Impedance: 8 Ohm ±20%, Sensitivity: 101±3dB, Frequency Response: 40Hz-22 KHz (-3dB), Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover Frequency: 3.5K Hz, 35mm Speaker Stand Mount.

Before using your new Speaker System Please review the following instructions, for the safety and investment.

INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

- 1.-Plug the power cable to the AC outlet and to the system and to the speaker
2.-Plug the Microphone in the "MIC" Input
3.-Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" Input
4.-Turn on the systems. A green LED will light up to indicate the speaker is on
5.-Set the volume on the low level on the MIC and LINE IN Input
6.-Increase the master volume (place on the right side of LINE OUT * connector)
7. Set TREBLE and BASS controls to equalize the sound
8.-A red LED will light up when the system detects overload power. You will must decrease the volume.

CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system.

EXTRA FUNCITONS

6.3 and canon connectors marked as LINE OUT can handle an amplifier or even another powered speaker cabinet, in cascade. On the bottom of the speaker there is a hole to place a stand.

Table with 5 columns: Model, Subwoofer, Sensitivity, Frequency, and other specifications for PPHP127AI and PPHP157AI.

FEATURES:

- PPHP84 400 Watts 8" 2 Way Plastic PA Speaker. Features include 8" Woofer, 1.5" Titanium Compression Driver, Dual 1/4 And Speakon Jacks Input, 2-Way Ported Enclosure For Extra Bass Resaponse, Ptc Driver Protect, Power Max:400Watts, Power Rms:200Watts, Impedance 8OHM +/-20%, Sensitivity:96+/-3DB, Frequency Responce :45HZ-20KHZ, Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover Frequency: 3.0KHZ, 35MM Speaker Stand Mount.

- PPHP86A: 400 Watts 8" Powered 2 Way PA Speaker. Features include 8" Woofer, 1.5" Titanium Compression Driver, Xlr Mic Input, Xlr&Stereo Rca Line Input, Xlr Line Output, Master Volume,Bass&Treble Control, Frequency Response:45HZ-20KHZ, Power Output:200Watts Rms,400Watts Peak, Crossover Frequency:3.0KHZ, 35MM Speaker Stand Mount.

- PPHP104 600 Watts 10" 2 Way Plastic PA Speaker. Features include 10" Woofer, 2" Titanium Compression Driver, Dual 1/4 And Speakon Jacks Input, 2-Way Ported Enclosure For Extra Bass Resaponse, Ptc Driver Protect, Power Max:600Watts, Power Rms:300Watts, Impedance:8OHM +/-20%, Sensitivity:96+/-3DB, Frequency Responce :45HZ-20KHZ, Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover frequency : 3.0KHZ, 35MM Speaker Stand Mount.

- PPHP106A: 600 Watts 10" Powered 2 Way PA Speaker. Features include 10" Woofer, 2" Titanium Compression Driver, Xlr Mic Input, Xlr&Stereo Rca Line Input, Xlr Line Output, Master Volume,Bass&Treble Control, Frequency Response:45HZ-20KHZ, Power Output:300Watts Rms,600Watts Peak, Crossover Frequency:3.0KHZ, 35MM Speaker Stand Mount.

Table with 5 columns: Model, Subwoofer, Sensitivity, Frequency, and other specifications for PPHP84, PPHP86A, PPHP104, and PPHP106A.

FEATURES:

- PPHP124 1000 Watts 12" 2 Way Plastic PA Speaker. Features include 12" Woofer, 2.5" Titanium Compression Driver, Dual 1/4 And Speakon Jacks Input, Ptc Driver Protect, Power Max:1000Watts, Power Rms:500Watts, Impedance:8OHM +/-20%, Sensitivity:96+/-3DB, Frequency Responce :45HZ-5KHZ, Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover frequency: 3.0KHZ, 35MM Speaker Stand Mount.

- PPHP126A: 1000 Watts 12" Powered 2 Way PA Speaker. Features include 12" Woofer, 2.5" Titanium Compression Driver, Xlr Mic Input, Xlr&Stereo Rca Line Input, Xlr Line Output, Master Volume,Bass&Treble Control, Frequency Response:45HZ-5KHZ, Power Output:500Watts Rms,1000Watts Peak, Crossover Frequency:3.0KHZ, 35MM Speaker Stand Mount.

- PPHP154: 1200 Watts 15" 2 Way Plastic PA Speaker. Features include 15" Woofer, 3" Titanium Compression Driver, Dual 1/4 And Speakon Jacks Input, 2-Way Ported Enclosure For Extra Bass Resaponse, Ptc Driver Protect, Power Max:1200Watts, Power Rms:600Watts, Impedance:8OHM +/-20%, Sensitivity:97+/-3DB, Frequency Responce :30HZ-3.5KHZ, Metal Grill To Protect The Woofer/Plastic Cabinet, Crossover frequency : 3.0KHZ, 35MM Speaker Stand Mount.

- PPHP156A: 1200Watts 15" Powered 2 Way PA Speaker. Features include 15" Woofer, 3" Titanium Compression Driver, Xlr Mic Input, Xlr&Stereo Rca Line Input, Xlr Line Output, Master Volume,Bass&Treble Control, Frequency Response:30HZ-3.5KHZ, Power Output:300Watts Rms,1200Watts Peak, Crossover Frequency:3.0KHZ, 35MM Speaker Stand Mount.

Table with 5 columns: Model, Subwoofer, Sensitivity, Frequency, and other specifications for PPHP124, PPHP126A, PPHP154, and PPHP156A.