

LS9

Digital Mixing Consoles



LS9-32



REV-X MIDI MY16

LS9-32 Rear Panel



LS9-16

LS9-16
12U



REV-X MIDI MY16

LS9-16 Rear Panel

Lightweight, compact, all-in-one digital mixers with advanced features and outstanding sound quality.

- 32 or 16 mono mic/line input channels plus 4 stereo input channels, expandable up to 64 or 32 channels in two layers.
- 16 mix buses, 8 matrix buses, plus stereo and mono buses with LCR mode.
- Top-performance analog mic/line preamplifiers.
- Compact and light enough for one person to move and set up easily.
- Yamaha Selected Channel interface allows smooth, intuitive access to detailed channel functions via a color LCD display and logically arranged encoders.
- Extensive gating, compression, and equalization facilities.
- Built-in USB memory recorder/player for recording or BGM playback.
- Virtual Rack packed with effects and EQ for just about any processing requirements.
- Scene memory for instant store and recall of all console parameters, including head amp gain.
- Advanced access management includes user keys (standard USB memory devices) that can be issued with different access levels for different users.
- LS9 Editor Software for enhanced operability and programmability.

OPTIONS

RK-1

Rack-mount Kit for LS9-16



LA1L

Gooseneck Lamp




SYSTEM EXAMPLE

Small / Medium Scale Live Sound System with LS9-32

This example depicts a live sound system built around an LS9-32 console. This system offers 32 inputs/16 outputs on stage, with additional 32 inputs/16 outputs available at the FOH position.

The two stage boxes and the LS9-32 are daisy-chained using CAT5e cables. SB168-ES dedicated Quick Setup feature within the AVS-ESMonitor software allows quick and easy configuration of your setup. You can use the SB168-ES head amp remote function from the LS9-32 to control microphone gain.

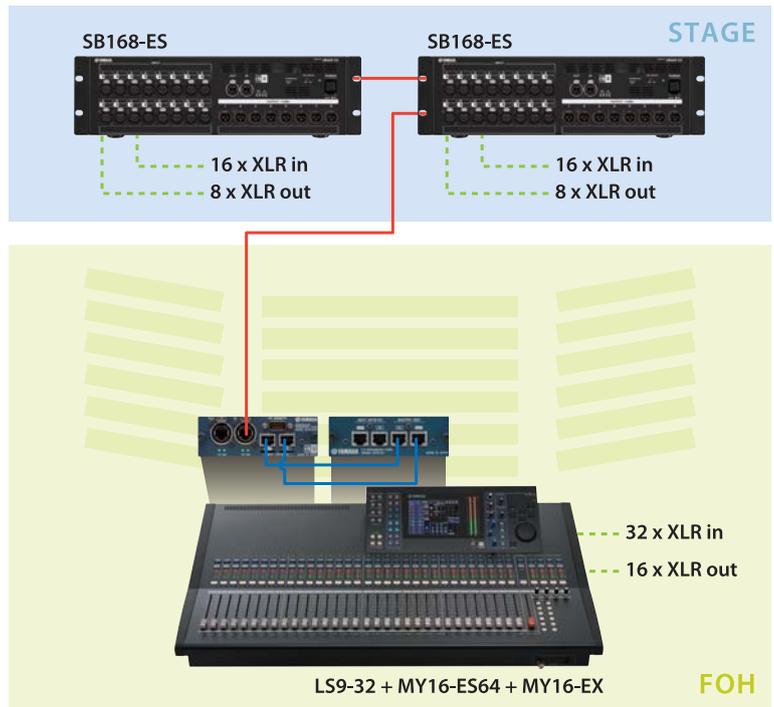

GENERAL SPECIFICATIONS

Internal processing	32bit (Accumulator=58bit)
Number of scene memories	300
Sampling frequency rate	Internal: 44.1kHz,48kHz External: 44.1kHz (-10%) to 48kHz (+6%)
Signal Delay	Less than 2.5ms INPUT to OMNI OUT (@fs=48kHz)
Total harmonic distortion^{*1} CH INPUT to OMNI OUT Input Gain=Min.	Less than 0.05% 20Hz to 20kHz @+4dBu into 600Ω
Frequency response CH INPUT to OMNI OUT	20Hz - 20kHz, 0, +0.5,-1.5dB @+4dBu into 600Ω
Dynamic range (maximum level to noise level)	110dB, DA Converter (OMNI OUT) 108dB, AD+DA (OMNI OUT)
Hum & noise level^{*2}	-128dB, Equivalent input noise (20-20kHz, Rs=150Ω, Input Gain=Max) -84dB, Residual noise
Crosstalk (@1kHz) Input GAIN=min	-100dB ^{*3} , -80dB, Adjacent input channels -100dB ^{*3} , -80dB, Input to output
Power requirements	110V-240V, 50/60Hz
Power consumption	LS9-32: 170W, LS9-16: 95W
Dimensions (W x H x D)	LS9-32: 884 x 220 x 500mm (34.8" x 8.6" x 19.6") LS9-16: 480 x 220 x 500mm (18.9" x 8.6" x 19.6")
Weight	LS9-32: 19.4kg (42lbs) LS9-16: 12.0kg (26lbs)


*1. Total harmonic distortion is measured with a 6dB/oct filter @80Hz

*2. Hum & noise are measured with 6dB/oct filter @12.7kHz; equivalent to a 20kHz filter with infinite dB/oct attenuation.


*3. Crosstalk is measured with a 30 dB/octave filter @22 kHz

DIMENSIONS

unit : mm

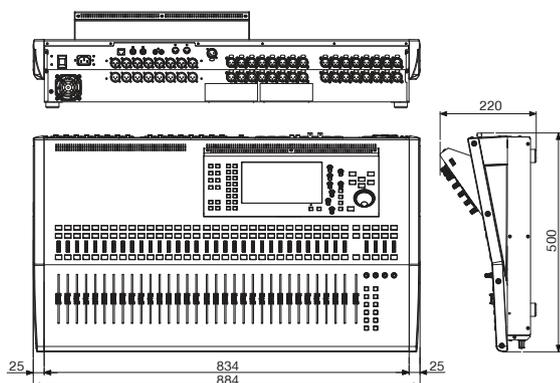

LS9-32

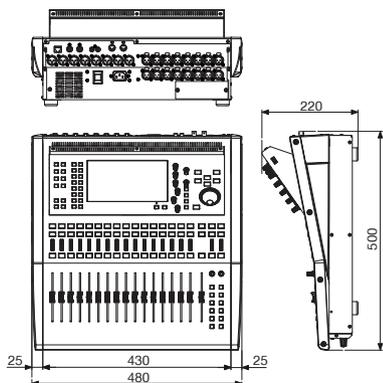

LS9-16

ANALOG INPUT SPECIFICATIONS

Input terminal	GAIN	Actual load impedance	For use with nominal	Input level			Connector
				Sensitivity	Nominal	Max. before clip	
INPUT 1-n ^{*1}	-62dB	3kΩ	50-600Ω Mics & 600Ω Lines	-82dBu	-62dBu	-42dBu	XLR3-31 type*
	+10dB			-10dBu	+10dBu	+30dBu	

*1. LS9-32: n=32, LS9-16: n=16

ANALOG OUTPUT SPECIFICATIONS

Output terminals	Actual source impedance	For use with nominal	GAIN SW	Output terminals		Connectors
				Nominal	Max. before Clip	
OMNI OUT 1-n ^{*1}	75Ω	600Ω Lines	+24dB	+4dBu	+24dBu	XLR3-32 type*
			+18dB	-2dBu	+18dBu	
PHONES	15Ω	8Ω Phones	--	75mW	150mW	ST Phone jack**
		40Ω Phones	--	65mW	150mW	

*1. LS9-32: n=16, LS9-16: n=8

DIGITAL INPUT SPECIFICATIONS

Terminal	Format	Data length	Level	Connector
2TR IN DIGITAL	IEC60958	24bit	0.5Vpp/ 75Ω	RCA Pin jack

DIGITAL OUTPUT SPECIFICATIONS

Terminal	Format	Data length	Level	Connector
2TR OUT DIGITAL	IEC60958 (Consumer Use)	24bit	0.5Vpp/ 75Ω	RCA Pin jack

CONTROL I/O SPECIFICATIONS

Terminal	Format	Level	Connector
NETWORK (Ethernet)	100Base-T	100Base-T	RJ-45
MIDI	IN	MIDI	DIN Connector 5P
	OUT	MIDI	DIN Connector 5P
WORD CLOCK	IN	--	TTL/75Ω terminated
	OUT	--	TTL/75Ω
USB	USB 1.1 Host	USB	USB A Connector (female)

