

NEXO


RST-BUMPER18







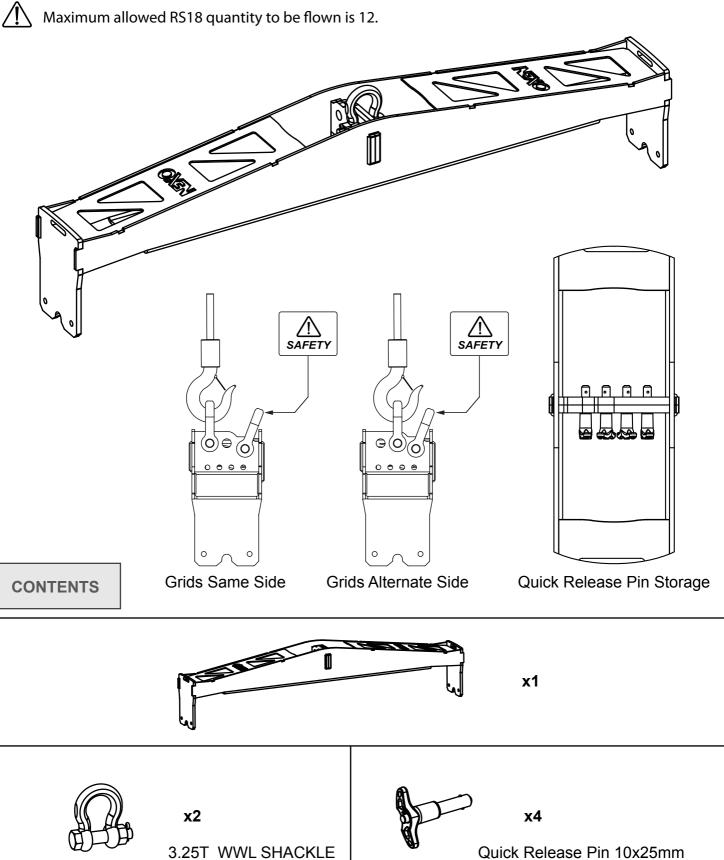

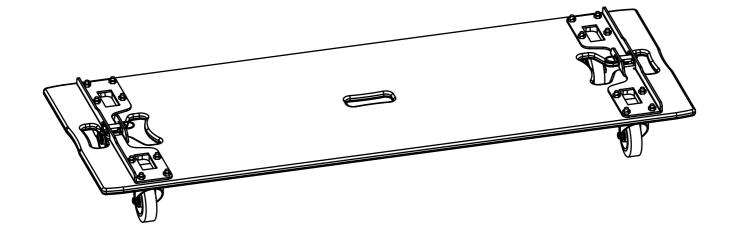


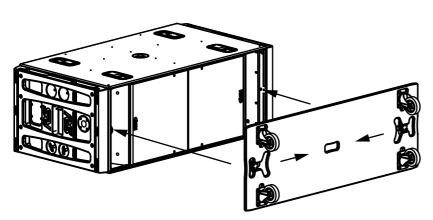






2 - Release the 2 latches.



CONTENTS

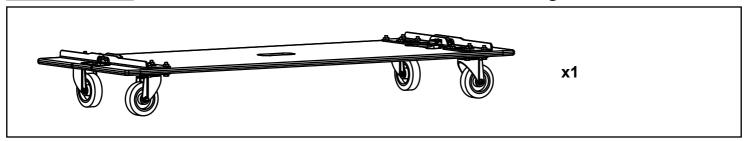



RST-FPLATES18



Maximum allowed RS18 quantity to be flown is 12.


ASSEMBLY:


TOOLS: Allen Key 6mm, Torx n°40.


- 1 Remove Handle.
- 2 Remove the 6 threated Plug.
- 3 Fill each screw hole with Loctite 243 [™] or equivalent.
- 4 Insert rubberised Spacer between Rigging plate and cabinet (Painted version only).
- 5 Tighten the 6 rigging plate screws alternately, at the rate of 4 revolutions each time.
- 6 Insert rubberised Spacer between handle and cabinet (Painted version only).
- 7 Reinstall Handle.




WARNING : Screws must be secured using LOCTITE 243 ™



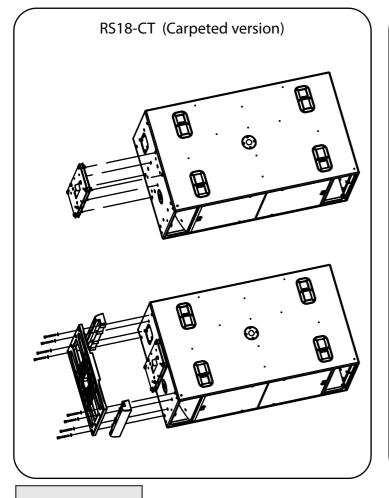

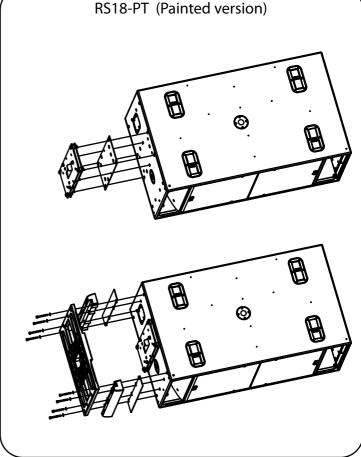

CONTENTS



Rev02 - DI

Dolly RS18



Maximum allowed RS18 quantity to be stacked on dolly is 3.




Contents:



Weight: 31 Kg




Dimensions:




Storage:



- 1. Dismount the rubber pad.
- 2. Insert the metal corner.
- 3. Put the rubber back and tight.
- 4. Repeat the steps for the others.

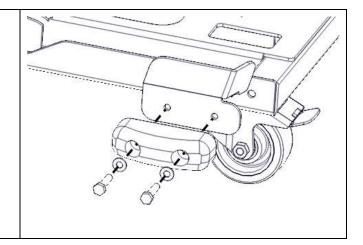

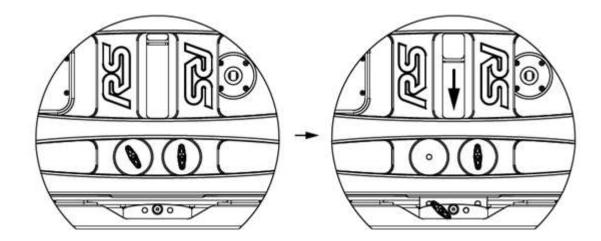

- 1. Place the first RS18 on the Dolly.
- 2. Push down-wards the mobile part of the rigging system right until it is on the Dolly.
- 3. Remove 1 of the 2 Quick Release pins from its parking position and insert it into the Dolly.
- 4. Secure all the RS18s by inter-locking themselves.

