


## 2-Channel 4K Scaling HDMI® Output Card for DM® Switchers

- > Modular output card for a DM-MD8X8, DM-MD16X16, or DM-MD32X32 switcher
- > Provides two independent 4K HDMI® outputs
- > Includes a discrete 4K/60 scaler on each output<sup>[1]</sup>
- > Upscales video and computer sources to match the native resolution of any screen up to Ultra HD and 4K<sup>[1]</sup>
- > Downscapes 4K, UHD, and ultra high-resolution computer signals to enable viewing on 1080p and lower-resolution displays<sup>[1]</sup>
- > Handles any input resolution from standard NTSC 480i or PAL 576i, to UHD and 4K<sup>[1]</sup>
- > Provides intelligent frame rate conversion<sup>[1]</sup>
- > Includes content-adaptive noise reduction<sup>[1]</sup>
- > Includes motion-adaptive de-interlacing<sup>[1]</sup>
- > Allows adjustable overscan or underscan up to 7.5%<sup>[1]</sup>
- > Automatically passes 3D video without scaling to 3D capable displays<sup>[1,5]</sup>
- > Supports up to 8x8 video wall processing using multiple cards<sup>[1]</sup>
- > Handles Dolby® TrueHD, DTS-HD®, and uncompressed 7.1 linear PCM audio
- > HDCP 2.2 compliant
- > Each output includes a balanced analog stereo audio output with volume control<sup>[1]</sup>
- > Allows extraction of stereo 2-channel audio signals
- > Enables device control via CEC
- > Occupies a single output card slot

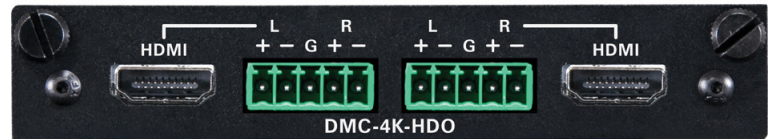

**Please note: Scaling functionality is a future feature that will be enabled through a firmware update.**

The DMC-4K-HDO is an output card designed for use with any card-based Crestron® DigitalMedia™ Switcher. It provides two independent HDMI® outputs with complementary balanced analog stereo audio outputs. The HDMI outputs are each capable of handling Full HD 1080p, Ultra HD, 2K, and 4K video signals. Built-in 4K/60 scaling enables devices connected to either HDMI output to handle any video resolution from NTSC 480i to 4K DCI.<sup>[1]</sup> DVI signals are also supported using HDMI-to-DVI adapters or interface cables.<sup>[2]</sup>

### 4K Ultra HD

The DMC-4K-HDO is capable of handling video resolutions up to 4K and Ultra HD. Support for 4K video also ensures support for the latest generation of computers and monitors with native resolutions beyond 1080p and WUXGA.

### 4K/60 Scalers<sup>[1]</sup>

An independent, high-performance 4K scaler is provided at each output to ensure that input sources of any resolution or frame rate can be routed and displayed reliably on virtually any display device without compromising the original input signal. As part of a DM® switcher with many outputs, this allows any video or computer source to be viewed simultaneously on multiple disparate displays, scaling the signal up or down to match the

native resolution of each display while simultaneously delivering a pure, unprocessed signal to any display with the same native resolution as the source.

No matter what source is selected, or where it's routed, the DMC-4K-HDO helps to ensure an optimal image on every screen. It can take any input resolution from standard definition NTSC 480i to ultra high-definition 4K DCI, and scale it beautifully to any output resolution up to 4K DCI (4096 x 2160 @ 60 Hz). Interlaced sources are converted to progressive scan using motion-adaptive deinterlacing. Intelligent frame rate conversion enables support for 24p and PAL format sources. Fully automatic operation eliminates any complicated setup by utilizing the displays' EDID to configure each scaler.<sup>[4]</sup>

### Video Wall Processing<sup>[1]</sup>

The DMC-4K-HDO has another trick up its sleeve, providing zoom capability and bezel compensation on each output to display just a portion of the source image. Using this feature, up to 32 output cards may be combined to provide processing for a video wall composed of up to 64 individual displays. Video wall configurations up to eight wide by up to eight high are supported.

### Audio Extracting

Each HDMI output on the DMC-4K-HDO is accompanied by a balanced analog audio output, allowing stereo audio signals to be extracted from the digital stream and fed to a sound system. The output volume is adjustable via a control system using a keypad, touch screen, handheld remote, or mobile device.<sup>[3]</sup>

### CEC Embedded Device Control

DigitalMedia offers an alternative to conventional RS-232 and IR display control by harnessing the CEC (Consumer Electronics Control) signal embedded in HDMI. Through its connection to a control system (via the DM switcher), the DMC-4K-HDO provides a gateway for controlling display devices right through their HDMI connections, potentially eliminating the need for any dedicated control wires or IR emitters.

# DMC-4K-HDO 2-Channel 4K Scaling HDMI® Output Card for DM® Switchers

To configure a DM switcher complete with input and output cards, cables, and other peripherals, please use the online [DigitalMedia Switcher Configuration Tool](#).

Are you upgrading an existing DM switcher that has older “multi-gang” DMCO-series output cards? Use the online [Output Card Additions and Upgrades Tool](#) to update your existing output cards and switcher to the new “single-gang” output card format.

Please refer to the [DigitalMedia Resources Webpage at <http://www.crestron.com/dmresources/>](#) for additional design tools and reference documents.

## SPECIFICATIONS

### Video

**Scalers<sup>[1]</sup>:** (2) 4K video scalers with motion-adaptive deinterlacing, intelligent frame rate conversion, Deep Color support, content-adaptive noise reduction, widescreen format selection (zoom, stretch, maintain aspect-ratio, or 1:1), and video wall processing (up to 8 wide x up to 8 high using multiple cards)

**Output Signal Types:** HDMI® w/Deep Color, 3D<sup>[5]</sup>, & 4K (DVI compatible<sup>[2]</sup>)

**Maximum Scaler Input<sup>[1]</sup> & Pass-Through Resolutions:**

Scan Type	Resolution	Frame Rate	Color Sampling	Color Depth
Progressive	4096x2160 4K DCI & 3840x2160 Ultra HD	24 Hz	4:4:4	30 bit
		30 Hz	4:4:4	24 bit
		30 Hz	4:2:2	36 bit
		60 Hz <sup>[1]</sup>	4:2:0	24 bit
	2560x1600 WQXGA	60 Hz	4:4:4	36 bit
	1920x1080 HD1080p	60 Hz	4:4:4	36 bit
Interlaced	1920x1080 HD1080i	30 Hz	4:4:4	36 bit

**Maximum Scaler Output Resolutions<sup>[1]</sup>:**

Scan Type	Resolution	Frame Rate	Color Sampling	Color Depth
Progressive	4096x2160 4K DCI & 3840x2160 Ultra HD	24 Hz	4:4:4	30 bit
		30 Hz	4:4:4	24 bit
		30 Hz	4:2:2	36 bit
		60 Hz <sup>[1]</sup>	4:2:0	24 bit
	2560x1600 WQXGA	60 Hz	4:4:4	36 bit
	1920x1080 HD1080p	60 Hz	4:4:4	36 bit

NOTE: Common resolutions are shown; other custom resolutions are supported at pixel clock rates up to 300 MHz

### Audio

**Output Signal Types:** HDMI, Analog Stereo<sup>[3]</sup>

**Digital Formats:** Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby® TrueHD, DTS®, DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio™, LPCM up to 8 channels

**Analog Formats:** Stereo 2-channel<sup>[3]</sup>

**Digital-To-Analog Conversion:** 24-bit 48 kHz

**Analog Performance:** Frequency Response: 20 Hz to 20 kHz ±0.5 dB;  
S/N Ratio: >95 dB, 20 Hz to 20 kHz A-weighted;  
THD+N: <0.005% @ 1 kHz;  
Stereo Separation: >90 dB

**Analog Volume Adjustment:** -80 dB to 0 dB

### Communications

**HDMI:** HDCP 2.2, EDID, CEC

NOTE: Supports management of HDCP and EDID; supports management of CEC between the connected HDMI devices and a control system

### Connectors

**HDMI:** (2) 19-pin Type A HDMI, female, comprising (2) HDMI digital video/audio outputs (DVI compatible<sup>[2]</sup>)

**L, R:** (2) 5-pin 3.5mm detachable terminal blocks comprising (2) balanced/unbalanced stereo line-level outputs<sup>[3]</sup>;  
Output Impedance: 200 Ohms balanced, 100 Ohms unbalanced;  
Maximum Output Level: 4 Vrms balanced, 2 Vrms unbalanced

### Construction

Plug-in card, occupies (1) DM switcher output card slot, includes metal faceplate w/black finish

### Weight

6.2 oz (176 g)

## MODELS & ACCESSORIES

### Available Models

**DMC-4K-HDO:** 2-Channel 4K Scaling HDMI® Output Card for DM® Switchers

### Available Accessories

**CBL Series:** Crestron® Certified Interface Cables

**MP-WP Series:** Media Presentation Wall Plates

**MPI-WP Series:** Media Presentation Wall Plates - International Version

# DMC-4K-HDO 2-Channel 4K Scaling HDMI® Output Card for DM® Switchers

## Notes:

1. Passes 4K video at up to 60 Hz. Scaling and video wall processing are future features that will be enabled soon through a firmware update. When scaling is initially enabled, it will support 4K resolutions at frame rates up to 30 Hz. Support for 4K scaling at 50 and 60 Hz will be enabled in a later firmware update.
2. DVI is supported via either HDMI output using a suitable adapter or interface cable. [CBL-HD-DVI](#) interface cables are available separately.
3. The analog stereo audio outputs are only active when the selected input source is outputting a 2-channel stereo signal. For applications using multichannel surround sound sources, the DM switcher should be equipped with “DSP” type input cards, which can downmix the surround sound signals to stereo.
4. EDID (Extended Display Identification Data) is data embedded in an HDMI or DVI signal that enables a display device to tell the scaler what resolutions and formats it can support.
5. Does not support scaling of 3D signals. Reverts to pass-through mode if a 3D signal and 3D-capable display are detected.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/salesreps](http://www.crestron.com/salesreps) or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: [patents.crestron.com](http://patents.crestron.com).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron, the Crestron logo, DigitalMedia, and DM are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS-HD, and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.

©2015 Crestron Electronics, Inc.