

GENERAL INFORMATION

Get smart – get moving! Moving light control comes to the Smart Solutions product suite. SmartFade ML offers professional moving light control in a compact, lightweight package. Direct access controls including color-coded backlit elastomer keys and encoder or fader control of moving light parameters, memory driven operation and built-in effects make SmartFade ML perfect for small gigs, meetings, parties, and other events where conventional and moving lights are used.

APPLICATIONS

- One-Off events
- Corporate Theatre
- Touring Productions
- School Auditoriums/Theatres
- Community Theatre
- House of Worship
- Small TV Studio
- Trade Show

FEATURES

- Memory style operation
- Up to 24 Devices (Moving Lights or Dimmer/Scrollers)
- Up to 48 Intensity Channels (multiple dimmers per channel)
- Encoders or fader controls for moving light parameters
- 24 Groups
- 24 x 3 Palettes (Focus, Color Beam)
- 288 Memories (24 x 12 pages)
- 11 Shape Effects
- 11 Linear Effects
- Parameter “Fan”
- Hue/Saturation control of color mixing
- Backlit color-coded elastomer keys indicate current color mix
- Fully programmable 199-step stack
- 24-step Sequences (12 x 12 pages)
- Tap tempo mode for sequence timing
- 10 Snapshot memories for temporary storage
- Undo function
- Master fader and Blackout button
- Bumps master fader
- Solo or pile-on mode for bump buttons
- 2 x LCD displays for configuration and programming

GENERAL INFORMATION

- Multiple consoles may be linked via MIDI*
- DMX512A Outputs (2 full Universes)
- MIDI In*
- MIDI Out*
- USB interface to PC for software upgrades

* MIDI support not available in initial software release.

ORDERING INFORMATION

SmartFade ML

MODEL	DESCRIPTION
SFML	SmartFade ML 24 moving light/48 intensity channel console

SmartFade Accessories

MODEL	DESCRIPTION
SFMEM	SD RAM Card
PS-INTL	International Power Supply, replacement. Includes plugs for American/Japanese, European 2-pin, British 3-pin and Australian/Chinese 2-pin.
SF-DC2	Dust Cover for SmartFade 2496/SmartFade ML

Other Consoles in the SmartFade Family

MODEL	DESCRIPTION
SF1248	SmartFade 1248, 48 channel console
SF1296	SmartFade 1296, 96 channel console
SF2496	SmartFade 2496, 96 channel console



SmartFade Console Series

SPECIFICATIONS

MECHANICAL

- 24 channel/parameter/memory faders
- 24 direct select keys with RGB LED backlights
- 3 rotary encoders for configuration, programming
- 2 2x20 LCD displays for configuration, programming
- 2 x DMX512A Outputs (5-pin XLR)
- MIDI In*
- MIDI Out*
- USB for connection to PC
- Crossfader pair with GO, PAUSE, GO BACK
- Master fader and Blackout key
- Bumps Master and SOLO key
- Kensington lock point for security

PLAYBACK CONTROLS

- 24 x 12 pages Memories
- 12 x 12 pages 24-step Sequences
- 199-step Stack
- Crossfader pair with GO, PAUSE, GO BACK
- Master fader and Blackout key
- Bumps Master and SOLO key
- Independent channels (IND1 and IND2)

PROGRAMMING TOOLS

- 24 x 2 pages parameter faders
- 3 rotary encoders
- 2 2x20 LCD displays
- 24 direct select keys for access to devices, groups, palettes and effects
- 24 Groups
- 24 x 3 Palettes (Focus, Color, Beam)
- Parameter "Fan"
- 22 Effects (11 shape effects/11 linear effects)
- 10 Snapshot memories for temporary storage
- Memories, Stack and Sequences can be edited
- Sequence/Stack steps can be inserted, moved and deleted individually

INTERFACES

- DMX512A Output
- USB
- MIDI In*
- MIDI Out*

* MIDI support not available in initial software release.

PHYSICAL

Product Dimensions


MODEL	HEIGHT		WIDTH		DEPTH	
	inches	mm	inches	mm	inches	mm
SmartFade ML	2.5	64	27	686	10	254

Product Weights*

MODEL	WEIGHT	
	lbs	kgs
SmartFade ML	10	4.5

*Weights and dimensions typical

DMX Console Applications

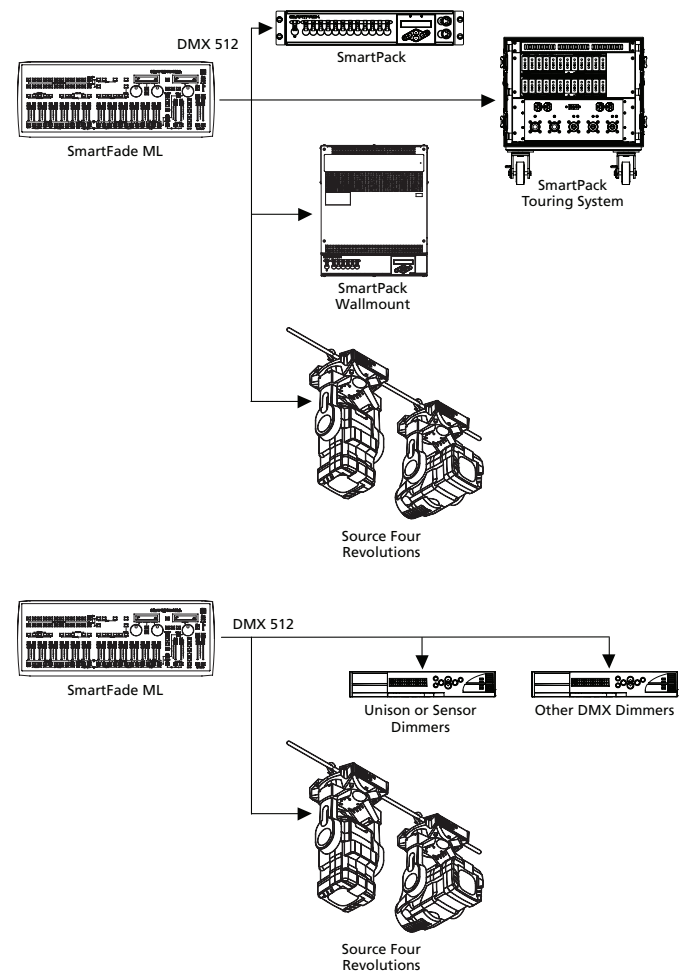

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736
London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000
Rome, IT • Via Ennio Quirino Visconti, 11, 00193 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +39 (06) 32 656 990
Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00
Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325
Web • www.etcconnect.com • Copyright©2006 ETC. All Rights Reserved. All product information and specifications subject to change. 7219L1006 Rev. A Printed in USA 03/07