

Model No.

CB84

Surface-mount Backbox

• For 8" speakers

White steel backbox with four inch depth is ideal for ceiling or wall surface installation of a standard 8" speaker (or Lowell Unihorn model LUH-15T) in schools, offices, restaurants, hotels and similar venues.

Features

- 12.312" square x 4" deep
- Precision-formed from 20-gauge steel, welded seams, white powder epoxy finish.
- Front formed flanges with U-clips to add a screw-mount grille.
- Universal mounting pattern in rear for installation to 4" square, 4" octagon, 2-gang or 1-gang E.O. box (not included).
- .375" hole with grommet for wire access in rear
- Side planished knockouts for .5" and .75" conduit.
- 8" x 8" mounting dimensions
- 1.5" thick acoustic batting
- Made in the U.S.A. with certified U.S. steel

A&E Specifications

The surface-mount backbox shall be Lowell Model CB84, which shall be fabricated of 20-gauge steel and lined with 1.5" thick acoustic batting. The rear of the backbox shall include provisions to mount to a 4" square, 4" octagon, 2-gang or 1-gang E.O. box (not included). The backbox shall feature a 3/8" dia. hole with grommet for wire access. Sides shall have knockouts for .5" and .75" conduit. The backbox shall also include four mounting holes and 8-32 U-clips at flanged corners to accept a grille. The backbox shall measure 12.312" square x 4" deep and have a white powder epoxy finish.

Compatible Components (order separately)

- Lowell Grille Models: JG8X, SQLK-8L

Model Number




Product No.	Description	Dimensions	Volume (cu.ft.)	Lining	Finish
CB84	Surface-mount steel backbox	12.312" square x 4" deep	0.351	1.5" batting	white




Universal mounting pattern punched in rear



Technical Drawings

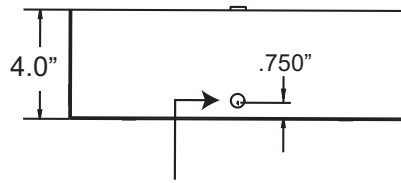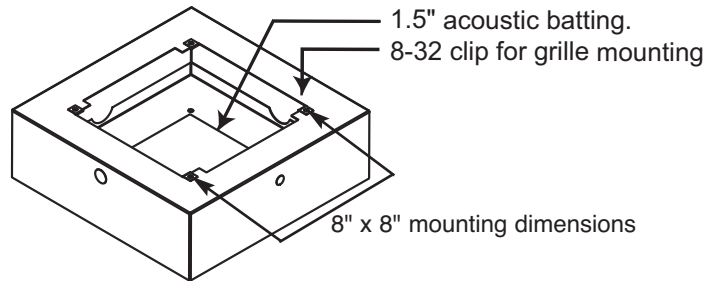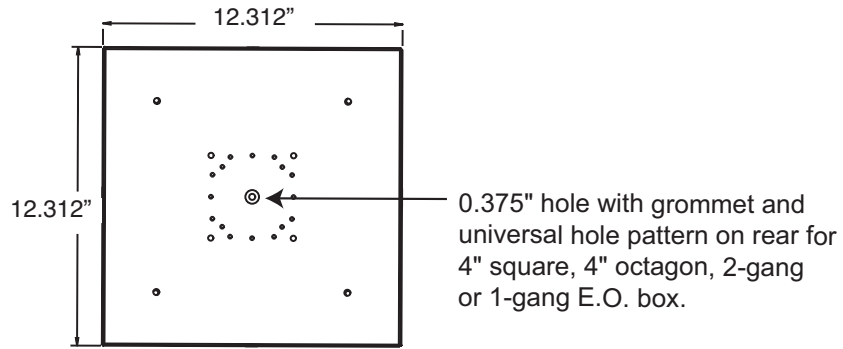

Single planished (.875" Dia) knockout for 1/2" conduit.

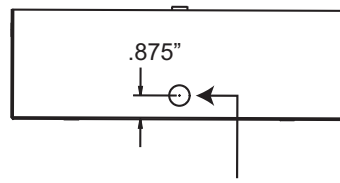

Single planished (1.11" Dia) knockout for 3/4" conduit.