



# Grommes~Precision Precision Electronics



## The MICRO Series

**3 Input Channel Mixer Amplifier: From 15 to 30 Watts of Continuous RMS Power**  
**M15 • M15X • M30 • M30X**

Grommes~Precision has gone back to the "basics" with the new **BASIX Series** of utility amplifiers.

Sensible, practical, and economical, the **BASIX Series** combines "barebones" features and Grommes~Precision know-how to save you money, without compromising quality or reliability! Designed for background music telephone/microphone page, the **BASIX Series** will automatically mute the music input channel for higher page intelligibility and then "soft-start" ramp the music back up to its previous volume level.

The **BASIX Series** delivers 7.5/15/30/60/125 watts of continuous RMS power and features 2 channels (1 mic/1 600 ohm/Tel-Page, 1 aux) of low distortion, wide frequency response, tone control, and an optional isolated transformer Tel-Page input.


With over a half-century of experience in the industry, Grommes~Precision backs the **BASIX Series** of utility amplifiers with its unbeatable expertise and Precision Assurance Pledge: a **5 year warranty** and a **30 day money back guarantee**.

### FEATURES

- 15 or 30 Watts of Continuous RMS Power
- 3 Channel Variable Input Mixing Flexibility: All Built-in—No Expensive Modules Required
- Compact Size: 2U in Height—1U in Width
- Automatic Mute (Defeatable)
- 15V Phantom Power (Defeatable)
- Separate Bass & Treble Controls
- Built Tough: Multiple Protections Including Built-In Circuit Breaker and Thermal & Current Limiting
- 25V & 70.7V Built-in Output Transformers
- Rack & Wall Mountable with Optional Kits
- 5 Year Warranty & 30 Day Money Back Guarantee

	MICRO SERIES
POWER OUTPUT RMS	15W / 30W
DISTORTION @RPO	≤0.5%
MIXING CHANNELS	3
OUTPUTS	4-8 ohm / 25V-70.7V LINE / BOOSTER
FREQUENCY RESPONSE DIRECT	+/-1dB 20-20kHz
LINE	+/-1dB 50-15kHz
INPUTS	2-MIC; 4-AUX; 1-600 ohm/TEL-PAGE
tone	BASS & TREBLE
MICROPHONE	SCREW (M15 & 30) or XLR & ¼" COMBO CONNECTORS +15V PHANTOM POWER
RACK UNITS	2U HIGH - 1U WIDE
DIMENSIONS	8.4"Wx3.25"Hx7.25"D
WEIGHT	6LBS / 9LBS

Ideal for any Telephone Interconnect and/or Background Music Application.

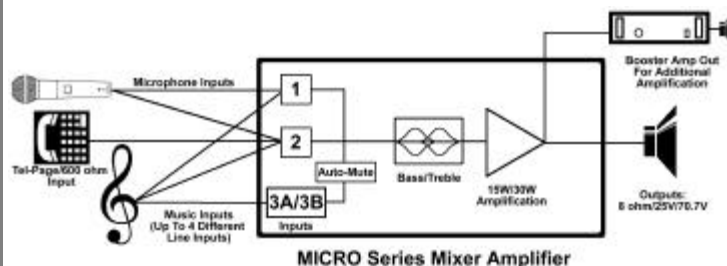

## Grommes~Precision

847-678-5350 800-SINCE-46 FAX: 847-678-0511

9101 King Ave. Franklin Park, IL 60131 USA



[www.grommesprecision.com](http://www.grommesprecision.com)

Grommes~Precision


Grommes~Precision is an American manufacturer of original, custom, and private labeled audio/electronic equipment for use in commercial, consumer, and industrial applications since 1946.



# Grommes~Precision Precision Electronics

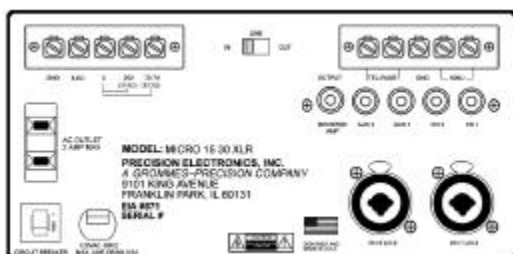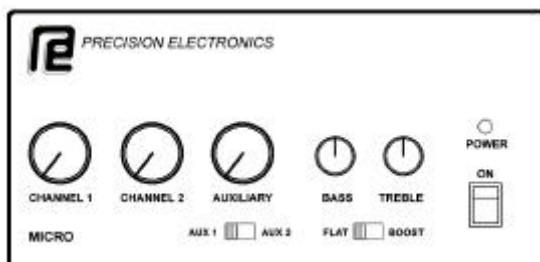

**MICRO STANDARD VERSION  
(SCREW TERMINALS)**

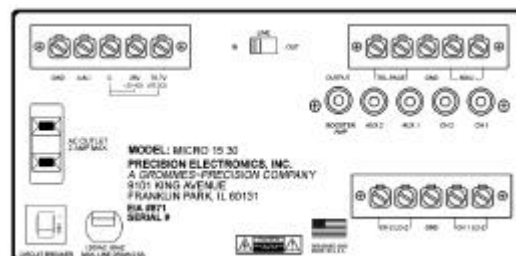

**MICRO XLR VERSION  
(COMBO XLR & 1/4" CONNECTORS)**

## MICRO 15 & MICRO 30 Architects Specifications

The mixer amplifier shall be a Grommes~Precision Electronics, Inc. model Micro 15/30. The power amplifier shall provide 15/30 watts of continuous, monaural RMS power into a direct coupled 4-8 ohm, 25V, or 70.7V lines. The 25V and 70.7V output shall be supplied through a fully isolated output transformer. Total harmonic distortion at rated output shall be less than or equal to 0.1%. The frequency response for 4-8 ohm output shall be 20Hz to 20kHz, +0 to -1 dB. The frequency response for 25V and 70.7V output shall be 50Hz to 15kHz,  $\pm 1$ dB. Hum and noise shall be at least 75dB below rated output for auxiliaries and 65dB below for microphones, unweighted.

The inputs shall be capable of: Channel 1 either microphone level or Hi-Z line level; Channel 2 either microphone level, 600 ohm/Tel-Page, or Hi-Z level; Channel 3 either one of two Hi-Z levels. The input sensitivity required to receive full rated output shall be: microphone

600 ohm - 0.50V, and Hi-Z - 0.50V. The input impedance shall be microphone level - 330 ohm, 600 ohm/Tel-Page - 600 ohm, 600 ohm - 600 ohm, and Hi-Z - 10K ohm.

The mixer amplifier shall have full range bass and treble controls that adjust  $\pm 12$ dB at 50Hz for bass control and  $\pm 12$ dB at 10kHz for treble control.

The front panel shall include a power indicator, power switch, controls for each of three channels, and one each for the bass and treble. A switch shall be included on the front panel to switch between two Hi-Z inputs for channel 3 and a switch shall be included to provide for the boost on the tone circuit, +6dB at 50Hz and 10KHz.

The back panel shall include input connectors, microphone inputs (either screw terminals for the standard model or XLR-Combo connectors for the XLR version), phono (RCA) connectors for all Hi-Z inputs, and screw terminals for the

connectors shall be screw terminals.

An output switch shall connect the output transformer in circuit for 25V and 70.7V line outputs and also switch in a low cut filter that begins to roll-off at 120 Hz. The circuit breaker and 2 ampere maximum convenience outlet shall also be on the back panel.

The mixer amplifier shall be available in either 120VAC 60Hz or 240VAC 50Hz versions (add DV to the model). The maximum power consumption of the 15 watt unit shall be 60W. The maximum power consumption of the 30 watt unit shall be 120W.

The unit shall measure 8.375"W x 3.25"H x 7.25"D (21.3cm x 8.3cm x 18.4cm). The unit shall weigh, 15 watt - 6lbs (2.7kg) and 30 watt - 9lbs (4 kg). The unit shall be rack mountable with optional rack mount kit RP-MIC. The unit shall include a full 3 year warranty be designed and manufactured in the United States of America.



**Grommes~Precision**

## Grommes~Precision

847-678-5350 800-SINCE-46 FAX: 847-678-0511

9101 King Ave. Franklin Park, IL 60131 USA

[www.grommesprecision.com](http://www.grommesprecision.com)

Grommes~Precision is an American manufacturer of original, custom, and private labeled audio/electronic equipment for use in commercial, consumer, and industrial applications since 1946.