

Model:

LFD Series

- **Surface-mount front door — solid steel, fully vented or smoked plexiglass**

Construction & Features

- For Lowell rack series LDTR, LER, LFR, LGR, LGNR, LGVR, LGTR, LPR, LSER, LSGR, LWBR, LWR, LWSR
- Extends 1" from rack frame, providing 0.75" space to accommodate equipment knobs
- 20"W x 1"D
- Features integral recessed handle and lock, which is keyed differently than the rack's rear door lock.
- Mounts left or right. Change orientation by moving two hinges and hinge nutserts on matching Lowell racks. Hinges install with 10-32 x 1" socket-head machine screws
- 180-degree swing
- Made in the U.S.A. with certified U.S. steel
- Black plugs cover screws for finished appearance

A&E Specifications

The surface-mount rack front door shall be Lowell Model No. _____, which shall measure 20"W x 1"D x _____ rack units. It shall be _____ (solid steel, fully-vented steel, or steel frame with smoked plexiglass insert). The door shall mount to the rack frame with left or right-hand swing and shall extend 1". The door shall include an integral recessed handle and key lock.


Option (order separately)

- **Extra keys (No. LK-FD):** Two extra keys



Heard Everywhere Since 1947

Changing from right to left swing: Doors mount right or left (with hinges relocated) to premounted nutserts on each side of the rack frame. This method eliminates drilling and allows doors to be installed after equipment is loaded.

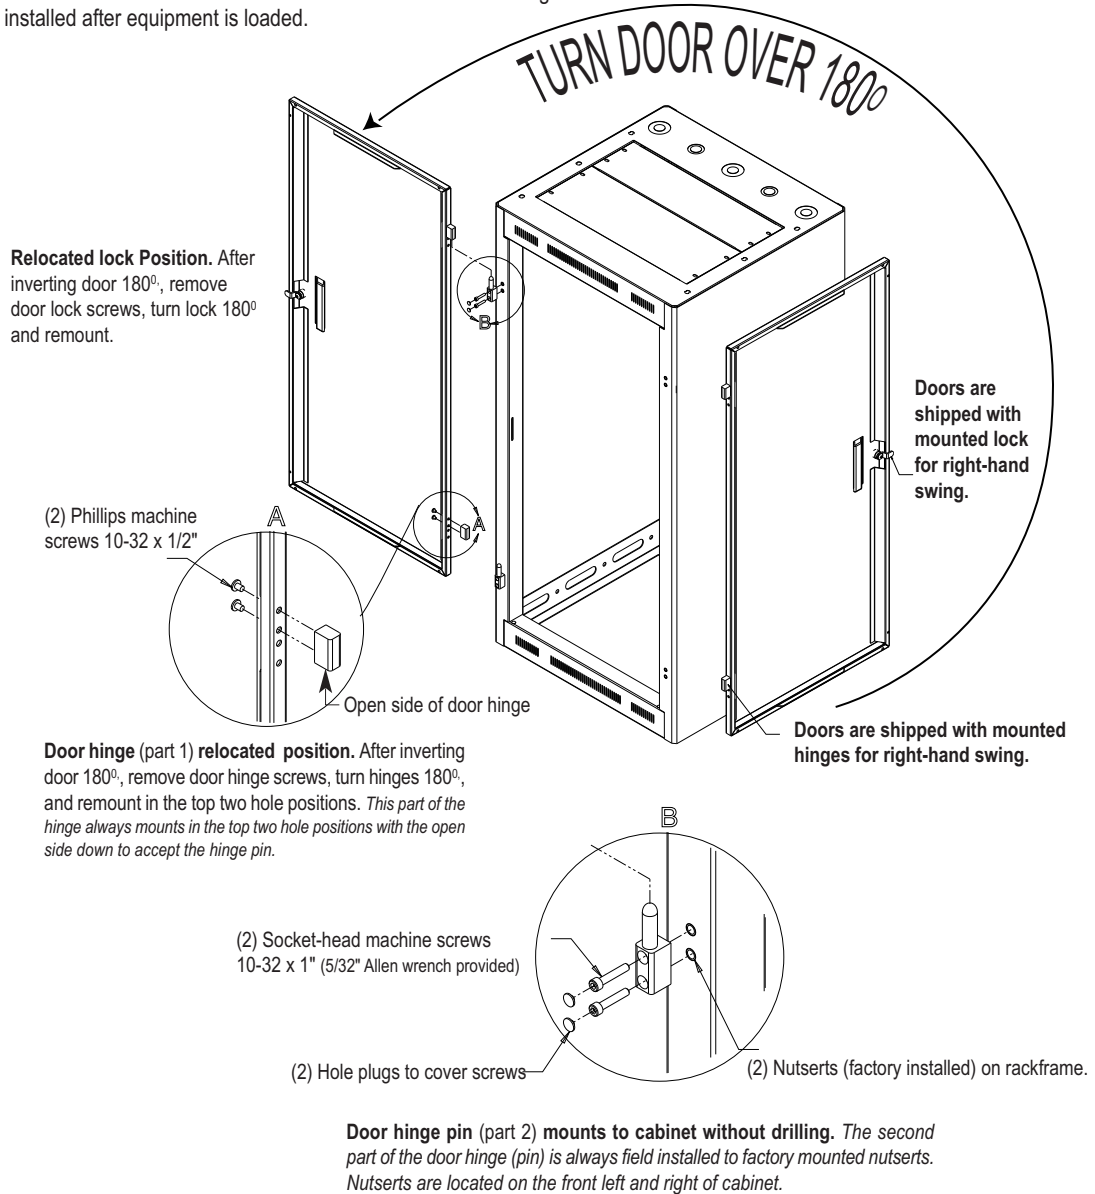

Model No. Summary

Rack Height	Solid Steel Door Model No.	Fully Vented Steel Door Model No.	Smoked Plexiglass Door Model No.
7U	LFD-7	LFD-7FV	LFD-7P
10U	LFD-10	LFD-10FV	LFD-10P
12U	LFD-12	LFD-12FV	LFD-12P
14U	LFD-14	LFD-14FV	LFD-14P
16U	LFD-16	LFD-16FV	LFD-16P
18U	LFD-18	LFD-18FV	LFD-18P
21U	LFD-21	LFD-21FV	LFD-21P
24U	LFD-24	LFD-24FV	LFD-24P
35U	LFD-35	LFD-35FV	LFD-35P
37U	LFD-37	LFD-37FV	LFD-35P
40U	LFD-40	LFD-40FV	LFD-40P
44U	LFD-44	LFD-44FV	LFD-44P
54U	LFD-54	-----	-----