

# CV345-CSB/CS Quick Start Guide

Full-HD (3G/HD-SDI) 2.5MP Compact Broadcast Camera with AUDIO + HDMI (CS/C mount w/ Auto-Iris)




- WARNING** Do not use the camera if fumes, smoke or a strange odor is emitted from the unit, or if it seems to not function correctly. Disconnect the power source immediately and consult your supplier.
- CAUTION** Always follow the instructions in the installation guide when applying power. Fire and equipment damage can occur if power is applied incorrectly. For the correct power supply, refer to the specification sheet.
- CAUTION** Do not install or operate in small, unventilated areas. Heat build up can significantly reduce the performance and operating life of the product and may cause a fire.
- CAUTION** To prevent damage, do not drop the camera or subject it to strong shock or vibration.
- CAUTION** If installed close to a TV, radio transmitter, magnet, electric motor transformer or audio speakers the magnetic field generated may interfere with or distort the image.
- CAUTION** Whether or not the camera is used outdoors, never point it toward the sun. Use caution when operating the camera in the vicinity of spot lights or other bright lights and light reflecting objects.
- CAUTION** Do not use the camera in extreme environments where high temperatures or high humidity exists. Use the camera under conditions where temperatures are between 14°F ~ 122°F (-10°C ~ 50°C), and humidity is below 90%.

## Features


- 2.5 Megapixel 1/3-inch CMOS Sensor
- CS/C Mount with DC-Auto Iris (lens sold separately)
- **CV345-CSB**: 1920x1080p59.94/29.97, 1920x1080i59.94, 1280x720p59.94/29.97fps
- **CV345-CS**: 1920x1080p60/50/30/25, 1920x1080i60/50, 1280x720p60/50/30/25fps
- Lemo-style (I/O) connector contains: RS-485(+/-), 12V power connector & TRS microphone input with 2.5V power supplied
- 3G/HD-SDI (BNC) & HDMI (full size-v1.3) built into rear panel
- Audio Mic 3.5mm TRS Stereo input embedding w/ 2.5V power supplied
- OSD Menu Joystick, RS-485 (Pelco/Visca)
- 12VDC

## Rear Panel Video/Power Connection

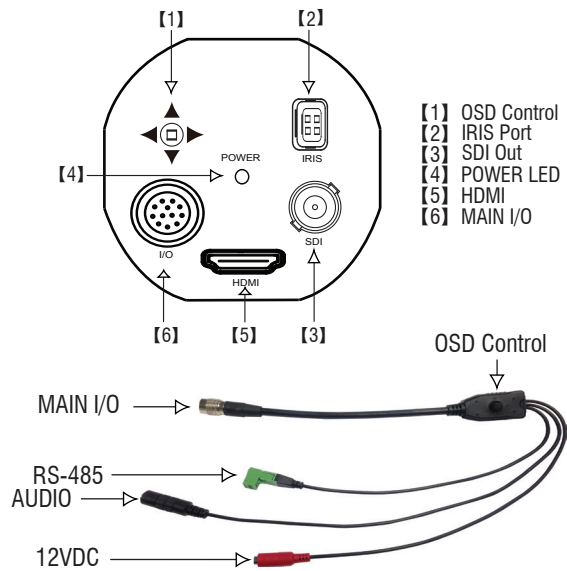


## Manual Iris Lens Connection

1. Please check whether lens mount type is C mount or CS mount.
2. CS mount type: Mount the lens after removing the rubber cap.  
C mount type: attach the C mount ring and mount the lens.
3. Go to the camera setup and set the LENS mode as ESC.

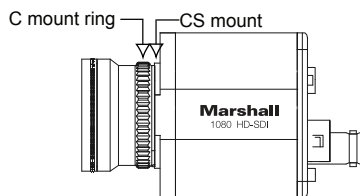

## Auto Iris Lens Connection


1. Mount the lens as described in the manual lens connection.
2. Connect the auto IRIS lens connector to the connector on IRIS port on the rear panel.
3. Go to the camera setup and set the LENS mode as DC IRIS

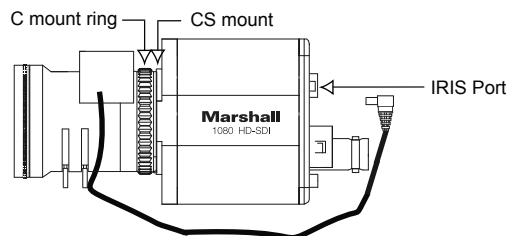

## Specifications

CV345		SPECIFICATIONS
Sensor	Image Sensor	1/3" Progressive CMOS (Approx. 2.1 mega)
	Scanning System	16:9 Progressive
	Sync. System	Internal
	Effective Pixel	1920(H) x 1080(V)
	Min. Illumination	0.2Lux (Day), 0.1Lux (Night), 0.005Lux (DSS on)
	Horizontal Resolution	1,000TVL
Optics	Lens	C/CS Mount, DC-IRIS
Functions	Back Light Compensation	WDR/BLC HLC (High Light compensation)
	Exposure	Auto / Manual
	White Balance	Auto (3,000°K~8,000°K) ATW (1,900°K~11,000°K) Manual
	Day & Night System	AGC / TDN (ICR)
Electronic Shutter	NTSC:	1/30~1/30000
	PAL:	1/25~1/30000
DSS ( ~X64)		
	Functions	Privacy Mask, Image Mirror, 3DNR, Flickerless Sharpness, Defog, DIS (Digital Image Stabilizer) Motion Detection, DSS (Digital Shutter Speed)
Video Output	SDI (BNC)	SMPTE 292M (1.485Gbps)
		1080p@25/30 or 29.97
		1080i@50/60 or 59.94
		720p@50/60 or 59.94
		720p@25/30
		SMPTE 424M (2.97Gbps)
HDMI (HDMI Type A)	1080p@50/60 or 59.94	
	800mVp-p, 75Ω, Unbalanced Generator (Single-Ended)	
	HDMI 1.3 compliant (Embedded Audio)	
	1920x1080p@50/60 or 59.94	
	1920x1080i@50/60 or 59.94	
	1920x1080p@25/30 or 29.97	
MIC Input	1280x720p@50/60 or 59.94	
	1280x720p@25/30	
	Mic Level (1Vrms). 2.5V Mic bias Bit Depth: 16,20,24,32Bits. 48KHz sample rates Gain : -12dB ~ 59.5dB	
Control	RS-485	PELCO-P/D, SONY-VISCA Protocol 8Bits Data, 1Stop Bit, No Parity, 2400~115200bps
	General	Operation Temperature
Power Input		12VDC (7VDC to 15VDC)
Power consumption		Max 6W
Dimensions (W X H X D)		60 X 60 X 56mm / 2.36 X 2.36 X 2.20Inches
Net Weight	Approx. 160g/0.35Lbs (Without Lens)	

## Dimensions

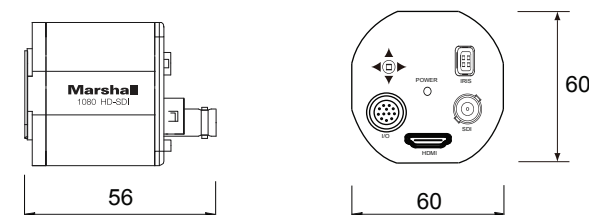

# HD-SDI 1080p Camera Setup: CV345-CS, CV345-CSB

SETUP	SUB MENU	SUB MENU	DESCRIPTION	
LENS	ESC		IRIS is fixed. Shutter controls exposure automatically if shutter is set as auto.	
	DC IRIS		Controls exposure automatically.	
WB CONTROL	AUTO		Color temperature is automatically adjusted to 3,000°K ~ 8,000°K	
	ATW		Continuously adjusts camera color balance in accordance with any change in color temperature. Compensates for color temperature changes within the range of 1,900K to 11,000K.	
	PUSH		Color temperature will be manually adjusted by pushing the OSD button. Place the white paper in front of the camera when OSD button is pressed to obtain the optimum result.	
	MANUAL	COLOR TEMPERATURE		Select color temperature from LOW, MIDDLE, or HIGH.
		RED GAIN		Adjust the Red tone level manually. Adjust the red tone of the image (0~20).
	BLUE GAIN		Adjust the Blue tone level manually. Adjust the Blue tone of the image (0~20).	
AE CONTROL (EXPOSURE)	BRIGHTNESS	0~20	Adjust the screen brightness. The bright control function adjusts gain and iris, to keep a brightness level.	
	AGC LIMIT	0~20	A function which controls the amplification/gain process automatically if the illumination falls under the usable level. Camera raises up gain to selected gain limit when dark conditions.	
	SHUTTER	AUTO		Shutter controls exposure automatically when IRIS is manual. Shutter control has the exposure control priority
		MANUAL		Shutter speed is fixed. The exposure control priority is given to other resources.
		FLICKERLESS		Use this function when you experience picture flicker, this happens when there is a conflict with the installed lighting frequency.
	DSS (SENS-UP)	OFF, x2~64	When luminance condition is low, DSS can adjust the picture quality by maintaining the light level. Minimum slow shutter limit is down to x64.	
BACK LIGHT	BACK LIGHT	WDR	Enable user to view both object and background more clearly when background is too bright. (LOW, MIDDLE, HIGH).	
		BLC	Enable a back light compensation feature.	
		SPOT	Enables a user to select a desired area on a picture and view that area more clearly when background is too bright.	
	ACE	LOW, MIDDLE, HIGH	Brightness correction of the dark image area.	
	ECLIPSE	LEVEL	Highlight the bright area with a masking box with a selected color. Adjust the masking level (0~20).	
	COLOR		Select the color for masking (GRN, MAG, RED, BLUE, BLK, WHT, YEL, CYN)	
DAY/NIGHT	AUTO	ANTI-SAT.	Adjust the anti-saturation level manually. This feature will reduce the saturation phenomenon in which part of the camera receiving the light affected by the IR or light in Night mode.	
		AGC LEVEL	The camera will stay in DAY in a normal environment, but switched to NIGHT mode when ambient illumination become this pre-set level. This level is threshold for switching day to night. It is same as the exposure gain level.	
		AGC MARGIN	Set the margin between Day →Night switching level and Night →Day switching level.	
		DWELL TIME	Select the checking time of light condition to confirm to change from the day mode to the night mode.	
	COLOR		The camera keeps color mode constantly.	
NIGHT		The camera keeps black/white mode constantly.		
IMAGE STABILIZER	RANGE	10%, 20%, 30%	This function will reduce image blurriness due to vibrations caused by hand shake or Pan/Tilt operation. The image will be digitally zoomed in to compensate the shifted pixels. Set the digital zoom level for image stabilizing. (Max. 30% : x1.4 Digital Zoom)	
	FILTER	LOW, MIDDLE, HIGH	Select the level of correction hold filter for the worst case of image. HIGH: Less image correction. Low: More image correction.	
	AUTO C	OFF, HALF, FULL	OFF: Disable the auto centering function. FULL: The camera will correct the blurriness due to vibrations caused by both hand shake or Pan/Tilt operation. HALF: The camera will correct the blurriness due to vibrations caused by hand shake.	
AUDIO	AUDIO LEVEL	0~143	Enabled when AUDIO AGC is set OFF. Adjust the audio level manually.	
	AUDIO AGC	OFF, ON	Automatically adjusts the MIC gain as the input signal becomes overly loud or very weak.	
	AGC MAX	0~119	Enabled when AUDIO AGC is set ON. Set the maximum level of AUDIO AGC.	
	SAMPLE BITS	16, 20, 24, 32 BITS	Select the bit depth of audio.	
IMAGE CONTROL	COLOR LEVEL	0~20	Adjust the color level value for a fine color tune.	
	SHARPNESS	0~20	Adjust the sharpness of the image. As you increase this value, the picture outline becomes stronger and clearer.	
	MIRROR		Video output is rotated horizontally.	
	FLIP		Video output is rotated vertically.	
	D-ZOOM	1.0X ~ 16.0X	Enlarge digitally the video output up to 16X.	
	DEFOG	AUTO		This feature will help increase visibility in extreme weather conditions, such as fog, rain or in a very strong luminous intensity.
		MANUAL		Set the level of defogging function (LOW, MIDDLE, HIGH).
	DNR	OFF, LOW, MIDDLE, HIGH	This feature will reduce the video noise at low ambient light.	
	MOTION		This feature will observe the object movement by motion zone and sensitivity that are pre-set with sub menu.	
	SHADING		This feature will correct the inconsistent brightness level in the image.	
GAMMA		This feature will adjust video output brightness (STANDARD, STRAIGHT, LOW, MIDDLE, HIGH).		
FRAME RATE		Change video output format.		
DISPLAY CONTROL	CAM VERSION		Display the firmware version of the camera.	
	CAM TITLE		The camera title can be entered and it will appear over the video output.	
	PRIVACY		Mask an area you want to hide on the screen with sub menu.	
	CAM ID	0~255	Select the camera ID number for RS-485 communication.	
	BAUDRATE		Set the baudrate of RS-485 communication (2400, 4800, 9600, 19200, 38400, 57600, 115200).	
	LANGUAGE		Select the menu language.	
RESET			Reset the camera settings to the factory defaults.	
EXIT			Exit the setup.	