



## RemoteAmp Three

PORTABLE HEADPHONE AMPLIFIER



### FEATURES

- 3 pin XLR Line Input
- XLR source selector switch
- Integrated speaker
- 3.5 mm Headphone / Earpiece Jack
- 1/4" Headphone Jack
- Compatible with party line intercoms
- >20 Hours on one 9 Volt Battery
- Uses Party Line intercom power when available.


RemoteAmp Three provides a listen only connection for IFB or full bandwidth audio monitoring. The XLR line level input accepts either a balanced mono signal or a one or two channel party-line intercom feed (listen-only). The XLR source switch selects between balanced input and intercom monitoring. An integrated speaker is disabled when headphones or earphones are connected. Separate volume controls for two channel party-line monitoring. The 1/2 watt, 1/4" headphone jack will cut through any crowd noise. Connect a mono IFB earpiece or stereo headphones to the 3.5 mm earpiece jack.

# RemoteAmp Three

STEREO HEADPHONE AMPLIFIER



BACK VIEW

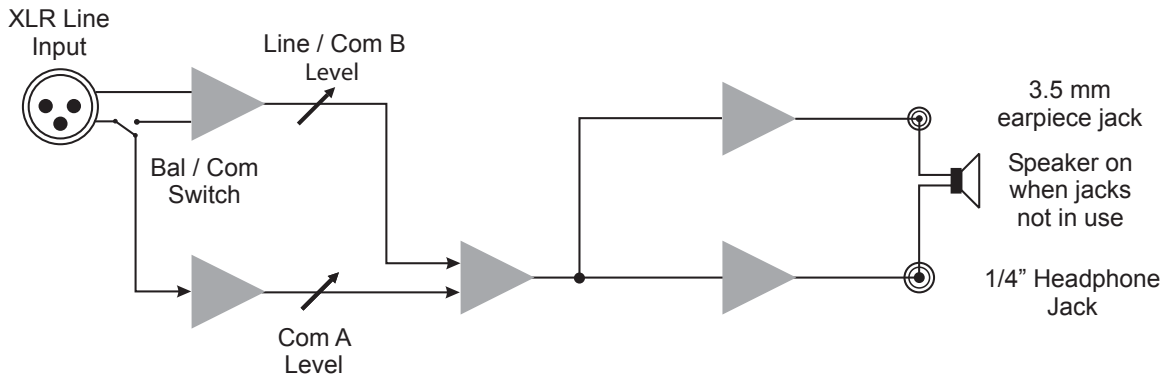

## Specifications

	Input		Output	
	XLR Line Input	Earpiece 1/8" (3.5mm) Stereo	Headphones 1/4"	
Impedance:	20k ohms	16 ohms	8 ohms	
Level:	775 mV RMS (0 dBu) nom.	250 mW per channel	½ watt per channel	
Frequency Response:	20Hz – 20 kHz	Size:	4.7" x 3.75" x 1.65" (12 x 9.5 x 4.2 cm)	
Power:	One 9 volt Alkaline Battery	Weight:	10 ounces (275 grams)	