


# JG11 SERIES

## STANDARD POWER DISTRIBUTION CENTERS

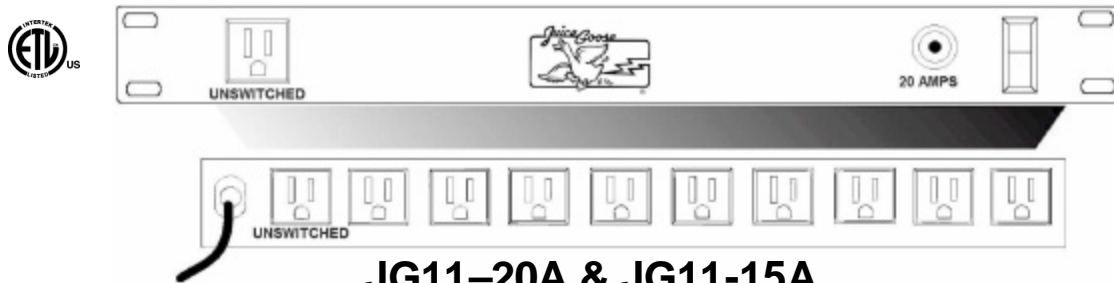

### JG11-20A & JG11-15A

**CONNECTIVITY AND CURRENT** Both of the JG11s feature 11 AC receptacles, including an unswitched outlet on the back as well as one on the front. All outlet receptacles are NEMA 5/15R, rated at 15 amps each and are rotated to better accommodate “wall wart” power supplies. While each of the outlets is rated for 15 amps the overall rating of the JG11-20A is 20 amps. This extra capacity coupled with 11 outlets makes this product a real work horse for high density power requirements. Because of this higher current rating the JG11-20A features a 12 gauge power cord with a NEMA 5-20P plug which will not fit into a 15 amp receptacle. For lower current but high connectivity requirements, the JG11-15A contains all the features of the 20 amp model, but with a 15 amp rating and, therefore, a 15 amp power cord.

**LONGER POWER CORD** The power cord on the JG11 is an accommodating 14 3/4 feet long to allow its use in difficult to reach applications. NOTE: due to the 20 amp rating of the JG11-20A the power cord has a NEMA 5-20P plug which requires a 20 amp receptacle for connection to main power. This plug is not compatible with wall receptacles rated at 15 amps.

**UP FRONT CIRCUIT BREAKER** Both JG11s feature a circuit breaker mounted on the front of the chassis to protect against current overload. Resetting the breaker in the event of an overload is easy. Circuit breakers are rated at either 15 amps or 20 amps, depending on the model.

**THREE YEAR WARRANTY** Every JG Series product is manufactured to exact Juice Goose specifications. Every JG Series product is subjected to a complete functional test before shipping. And every JG11 packs a 3 year warranty and the full backing of the best name in power products, Juice Goose.

**SERVICE & SAFETY** There are no user serviceable parts inside the JG11. For service or repair please call 719-772-1404 to speak with our Technical Support Representatives. The JG Series is designed to operate with 120v 60hz. Operation with 220 or 240 will damage the unit and possibly cause personal injury. To avoid electrical shock please disconnect power cord before installing or removing unit. The JG11-20A is ETL listed.

## SPECIFICATIONS

INPUT VOLTAGE	120vac, 60 Hz
CURRENT CAPACITY	15 or 20 Amps
DIMENSIONS (inches)	1.75H x 19W x 7D
WEIGHT (lbs)	5.5
CHASSIS	All Steel, Finished Semi-gloss Black
POWER CORD	20 AMP 14.75 Foot 12/3 SJT with NEMA 5-20P 15 AMP 14.75 Foot 14/3 SJT with NEMA 5-15P
POWER OUTPUT RECEPTACLES	Eleven NEMA 5-15, 15 Amp Rating Each
CURRENT OVERLOAD PROTECTION	Circuit Breaker, 15 or 20 Amp Thermal on Front
AC LINE FILTRATION	Line Capacitor (Line & Neutral)
VOLTAGE SPIKE PROTECTION	Metal Oxide Varistor