

# EUROPOWER PMP530M

### Ultra-Compact 300-Watt 5-Channel Powered Mixer with Multi-FX Processor and FBQ Feedback Detection System

- Compact and rack-mountable 300-Watt powered mixer with Multi-FX processor
- Revolutionary Class-D amplifier technology: enormous power, incredible sonic performance and super-light weight
- Ultra-compact design at nearly half the depth and weight of conventional powered mixers means no more lugging around dead weight
- Ultra-low noise ULN design for highest possible headroom and ultra-transparent audio
- 5-channel mixer section features 5 mic/line channels, plus separate CD/Tape input/output
- Integrated 24-bit digital FX processor with 100 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- Revolutionary FBQ Feedback Detection system instantly reveals critical frequencies for easy feedback removal
- 5 high-quality mic preamps with switchable Pad and Clip LEDs
- Effective, extremely musical 2-band EQ on all channels
- 7-band graphic EQ allows precise frequency correction
- 3 speaker outputs on ¼" jack and professional speaker connectors



If you need superior sound quality for small club gigs, churches or speeches, but want to keep the outboard gear to a minimum—then look no further than the EUROPOWER PMP530M. This 300-Watt 5-channel powered mixer weighs just 9.5 lbs (4.3 kg) and provides everything you need in one efficient, highly portable package. The PMP530M is ideally suited for vocal groups, small bands, churches, town halls, banquet rooms and much more.

#### Big Power

Most powered mixers in this class tease you with maybe 100 or 200-Watts of peak output power. Not the PMP530M. This bad boy comes armed to the teeth with 300-Watts of the cleanest power you'll find anywhere. Class-D amplifier and Switch Mode Power Supply technology make it possible by reducing the need for heavy transformers and massive heat sinks. The PMP530M's

state-of-the-art design architecture keeps it cool as a cucumber for hours and hours of continuous operation.

#### So Easy to Operate

One of the PMP530M's most impressive features is its ease of use. Simply connect your passive loudspeakers to the rear panel jacks, plug the power cord into the wall and turn the unit on. Oops, be sure the Main volume control is set to zero first. Connect a microphone to the channel 1 XLR socket and speak or sing while adjusting the Channel 1 Level control until the Clip LED barely flickers. If it stays lit for more than a quick flash, you'll need to turn it down a little. Turn up the Main volume control and you should be able to hear yourself through the speakers. Follow the same procedure for the other channels and you are done. See, we told you it was easy!

*Continued on next page*



# EUROPOWER PMP530M

- Internal switch-mode power supply, noise-free audio, superior transient response and very low power consumption
- Rack mount brackets included
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

## Exquisite EQ


Sometimes you may need to fine-tune the sound of a microphone or instrument. That's where you'll appreciate PMP530M's highly musical 2-band channel EQ. The Low control adjusts the amount of bass content in the signal ( $\pm 15$  dB @ 80 Hz) and the High control adjusts the amount of treble ( $\pm 15$  dB @ 12 kHz). Simply dial in the sound you like with these two controls. If the Clip LED stays on too long, or if it doesn't come on at all, readjust the Level control. Done.

## Say Goodbye to Feedback


Nothing detracts from a perfect performance more than feedback. You know, those high-pitched squeals that drive both human beings and dogs over the edge. The PMP530M comes loaded with BEHRINGER's amazing FBQ Feedback Detection System, which automatically pinpoints trouble frequencies so you can snuff them out before you—or your audience—go deaf. Just touch the FBQ button and watch as all feedback-related frequencies are indicated by red LEDs on the 7-band graphic EQ sliders. Pull the illuminated sliders down until the LEDs go out, and voilà—no more feedback!

*Continued on next page*

## Front View

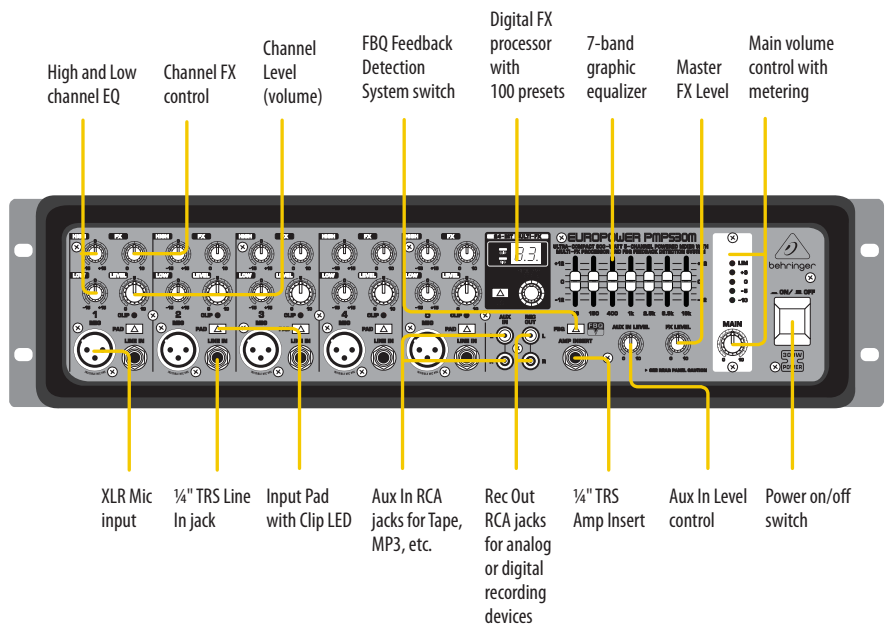

## Rear View

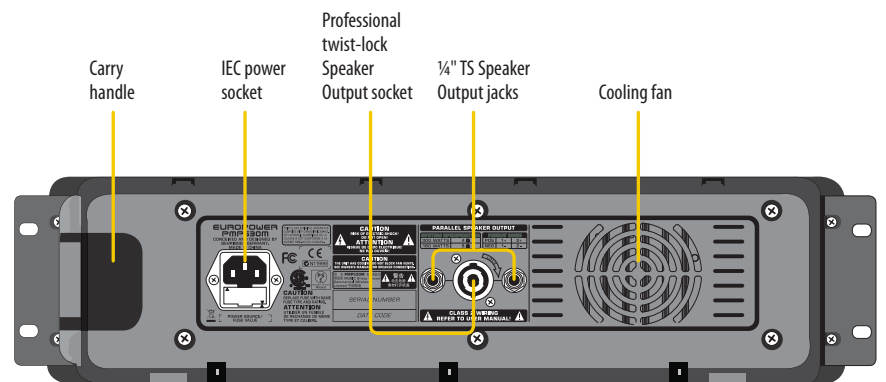

# EUROPOWER PMP530M

## Effective FX

The finishing touch to any performance comes with the proper application of effects. If every room on the planet were perfect, there would always be just the right amount of echo and reverb to make everything sound great. That's why almost anyone can sing in the shower; all those tile and glass surfaces cause the sound to bounce around and come back to you sounding much better than when they left. PMP530M's built-in 24-bit FX processor gives you 100 digital effect presets such as delay (echo), reverb, chorus and multi-FX you can apply to any channel—without the need for expensive outboard gear. Now you don't have to stay in the shower to sound really good!

## The Ins and Outs

The EUROPOWER PMP530M provides more connectivity than anything in its class. RCA Aux In jacks allow you to route an external signal to the main mix and control the volume with the Aux In Level control.





This is an excellent way to add music from CD players, iPods or tape decks, etc. Handy Record Out jacks let you save your performance via any convenient recording device, analog or digital. The TRS Amp Insert jack can be used as an FX loop, allowing you to tap into your favorite external effects devices. Now that's versatility!

## Small, Simple, Superb

Small, simple events call for a lightweight, simple powered mixer.

Easy to learn and operate, the PMP530M provides an impressive feature set, typically found only on more expensive non-powered systems. If you're looking for high-quality audio performance coupled with power and incredible versatility, you owe it to yourself to get in to your BEHRINGER dealer today and try one out. We think you'll agree with us; good things do come in small packages!

## Typical PA Setup

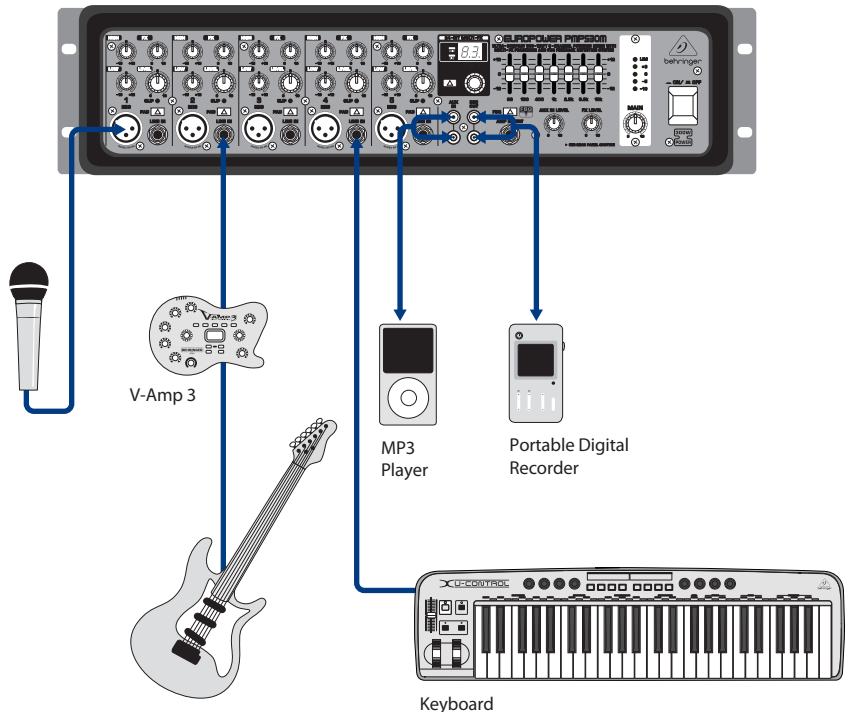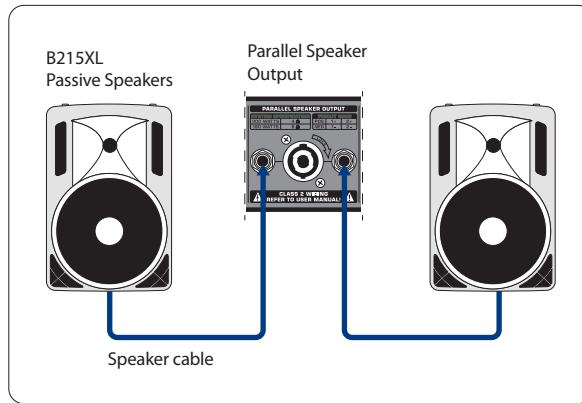

# EUROPOWER PMP530M

## Specifications

### Microphone Inputs

Type	XLR, electronically balanced
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 $\Omega$ source impedance	-110 dB / 112 dB A-weighted
@ 50 $\Omega$ source impedance	-110 dB / 112 dB A-weighted
@ 150 $\Omega$ source impedance	-110 dB / 112 dB A-weighted
Frequency response	10 Hz - 50 kHz (-3 dB)
Gain	+30 dB, +8 dB with pad
Max. input level	+12 dBu @ 10 dB gain
Impedance	approx. 1.6 k $\Omega$ balanced 800 $\Omega$ unbalanced

### Mono Line Inputs

Type	1/4" TRS connector, balanced
Impedance	approx. 20 k $\Omega$ balanced, 10 k $\Omega$ unbalanced
Max. input level	+22 dBu

### Equalizer

Low	80 Hz / +/-15 dB
High	12 kHz / +/-15 dB

### Main Mix System Data

Noise	
Main mix @ - $\infty$ , channel fader @ - $\infty$	-106 dB / -109 dB A-weighted
Main mix @ 0 dB, channel fader @ - $\infty$	-88 dB / -90 dB A-weighted
Main mix @ 0 dB, channel fader @ 0 dB	-78 dB / -80 dB A-weighted

### FX Section

Converter	24-bit Delta-Sigma
Sampling rate	40 kHz
Display	2-digit, 7-segment LED

### Loudspeaker Outputs

Type	Twist-lock professional speaker connector, 1/4" TS connector (2)
Load impedance	4-16 $\Omega$

### Output Power

<b>RMS @ 1 % THD</b>	
8 $\Omega$	120 W
4 $\Omega$	215 W
<b>Maximum Output Power</b>	
8 $\Omega$	180 W
4 $\Omega$	300 W

### Power Supply

<b>Mains voltage</b>	
USA/Canada	120 V~, 60 Hz
China/Korea	220 V~, 50/60 Hz
Europe/UK/Australia	230 V~, 50 Hz
Japan	100 V~, 50/60 Hz
Fuse 100 - 120 V~	T 5 A H 250 V
Fuse 220 - 240 V~	T 2.5 A H 250 V
Power consumption	max. 230 W
Mains connector	Standard IEC receptacle

### Dimensions/Weight

Dimensions (H x W x D)	approx. 4.6 x 17.7 x 8.9" approx. 117 x 450 x 225 mm
Weight	9.5 lbs/4.3 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

**Europe** MUSIC Group Services EU GmbH  
Tel.: +49 2154 9206 4149 / Fax: +49 2154 9206 4199

**USA/Canada** MUSIC Group Services US Inc.  
Tel.: +1 425 672 0816 / Fax: +1 425 673 7647

**Singapore** MUSIC Group Services SG (Pte.) Ltd  
Tel.: +65 6845 1800 / Fax: +65 6214 0275

**Australia** MUSIC Group Services AU Pty Ltd  
Tel.: +61 03 9877 7170 / Fax: +61 03 9877 7870

**Japan** MUSIC Group Services JP K.K.  
Tel.: +81 3 5281 1180 / Fax: +81 3 5281 1181

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULFILLERS AND RESELLERS ONLY. ALL RIGHTS RESERVED. © 2011 MUSIC Group IP Ltd, Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands.