


UB802

EUROSTACK

Technical Specifications

Version 1.1 September 2002

ENGLISH

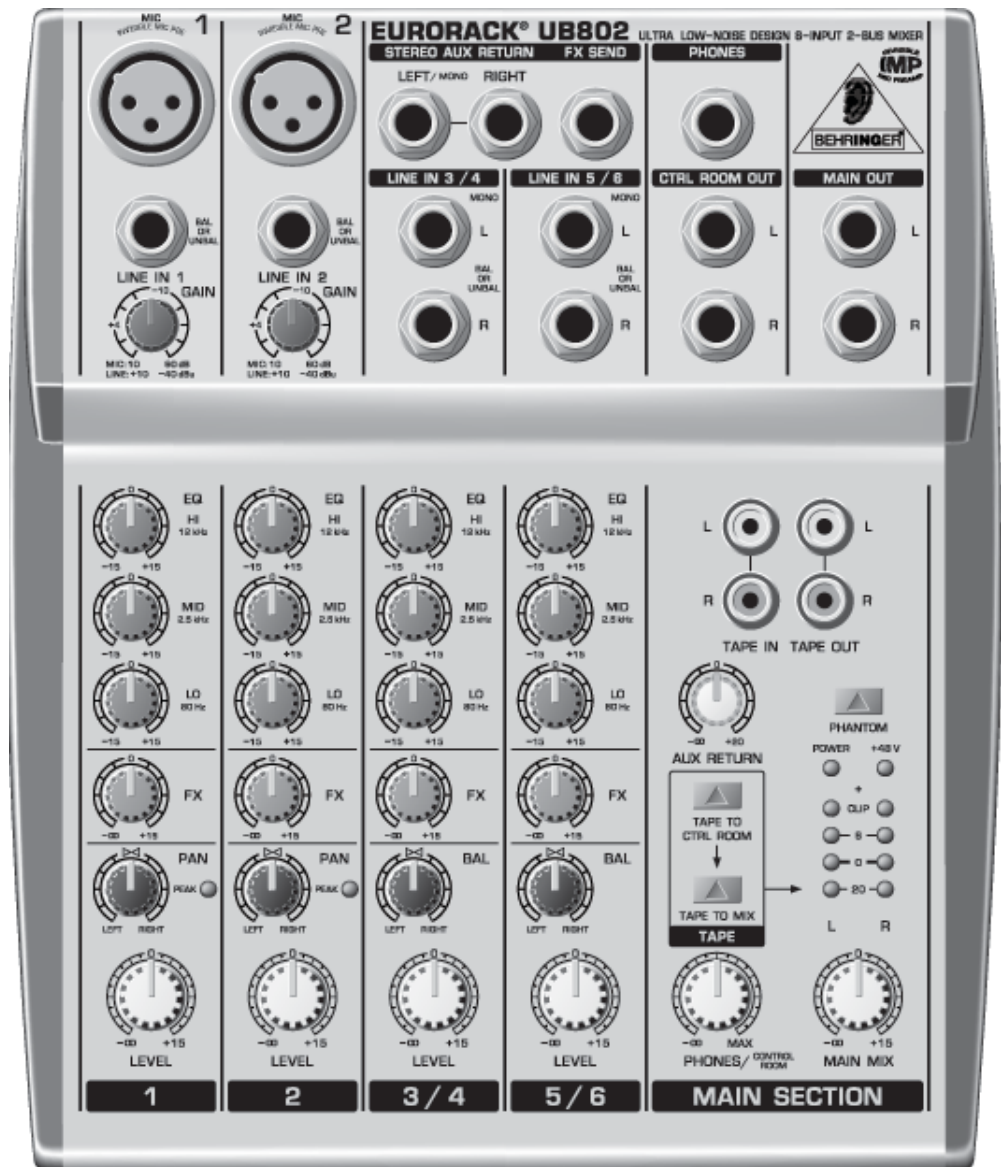

www.behringer.com


EURORACK

Ultra low-noise design 8-input 2-bus mixer

- ▲ Ultra low-noise ULN design, highest possible headroom, ultra-transparent audio
- ▲ 2 new state-of-the-art, studio-grade IMP “Invisible” Mic Preamps with:
 - 130 dB dynamic range for 24-bit, 192 kHz sampling rate inputs
 - Ultra-wide 60 dB gain range
 - Lowest possible distortion 0.0007% (20 Hz - 20 kHz)
- ▲ Effective, extremely musical 3-band EQ on all channels
- ▲ 6 balanced high-headroom line inputs
- ▲ State-of-the-art 4580 operational amplifiers provide lowest noise and distortion—better than 4560 op amps
- ▲ 1 post fader FX send per channel for external FX devices
- ▲ 1 stereo aux return for FX applications or as separate stereo input
- ▲ Peak LEDs on all mono channels
- ▲ Main mix outputs plus separate control room, headphones and stereo tape outputs
- ▲ Tape inputs assignable to main mix or control room/phones outputs
- ▲ Switchable +48 V phantom power for condenser microphones
- ▲ High-quality sealed rotary controls from ALPS® for long-term reliability
- ▲ External power supply for noise-free audio and superior transient response
- ▲ Extremely rugged steel construction ensures long life even under the most demanding conditions
- ▲ Manufactured under ISO9000 certified management system

EURORACK UB802

BLOCK DIAGRAM

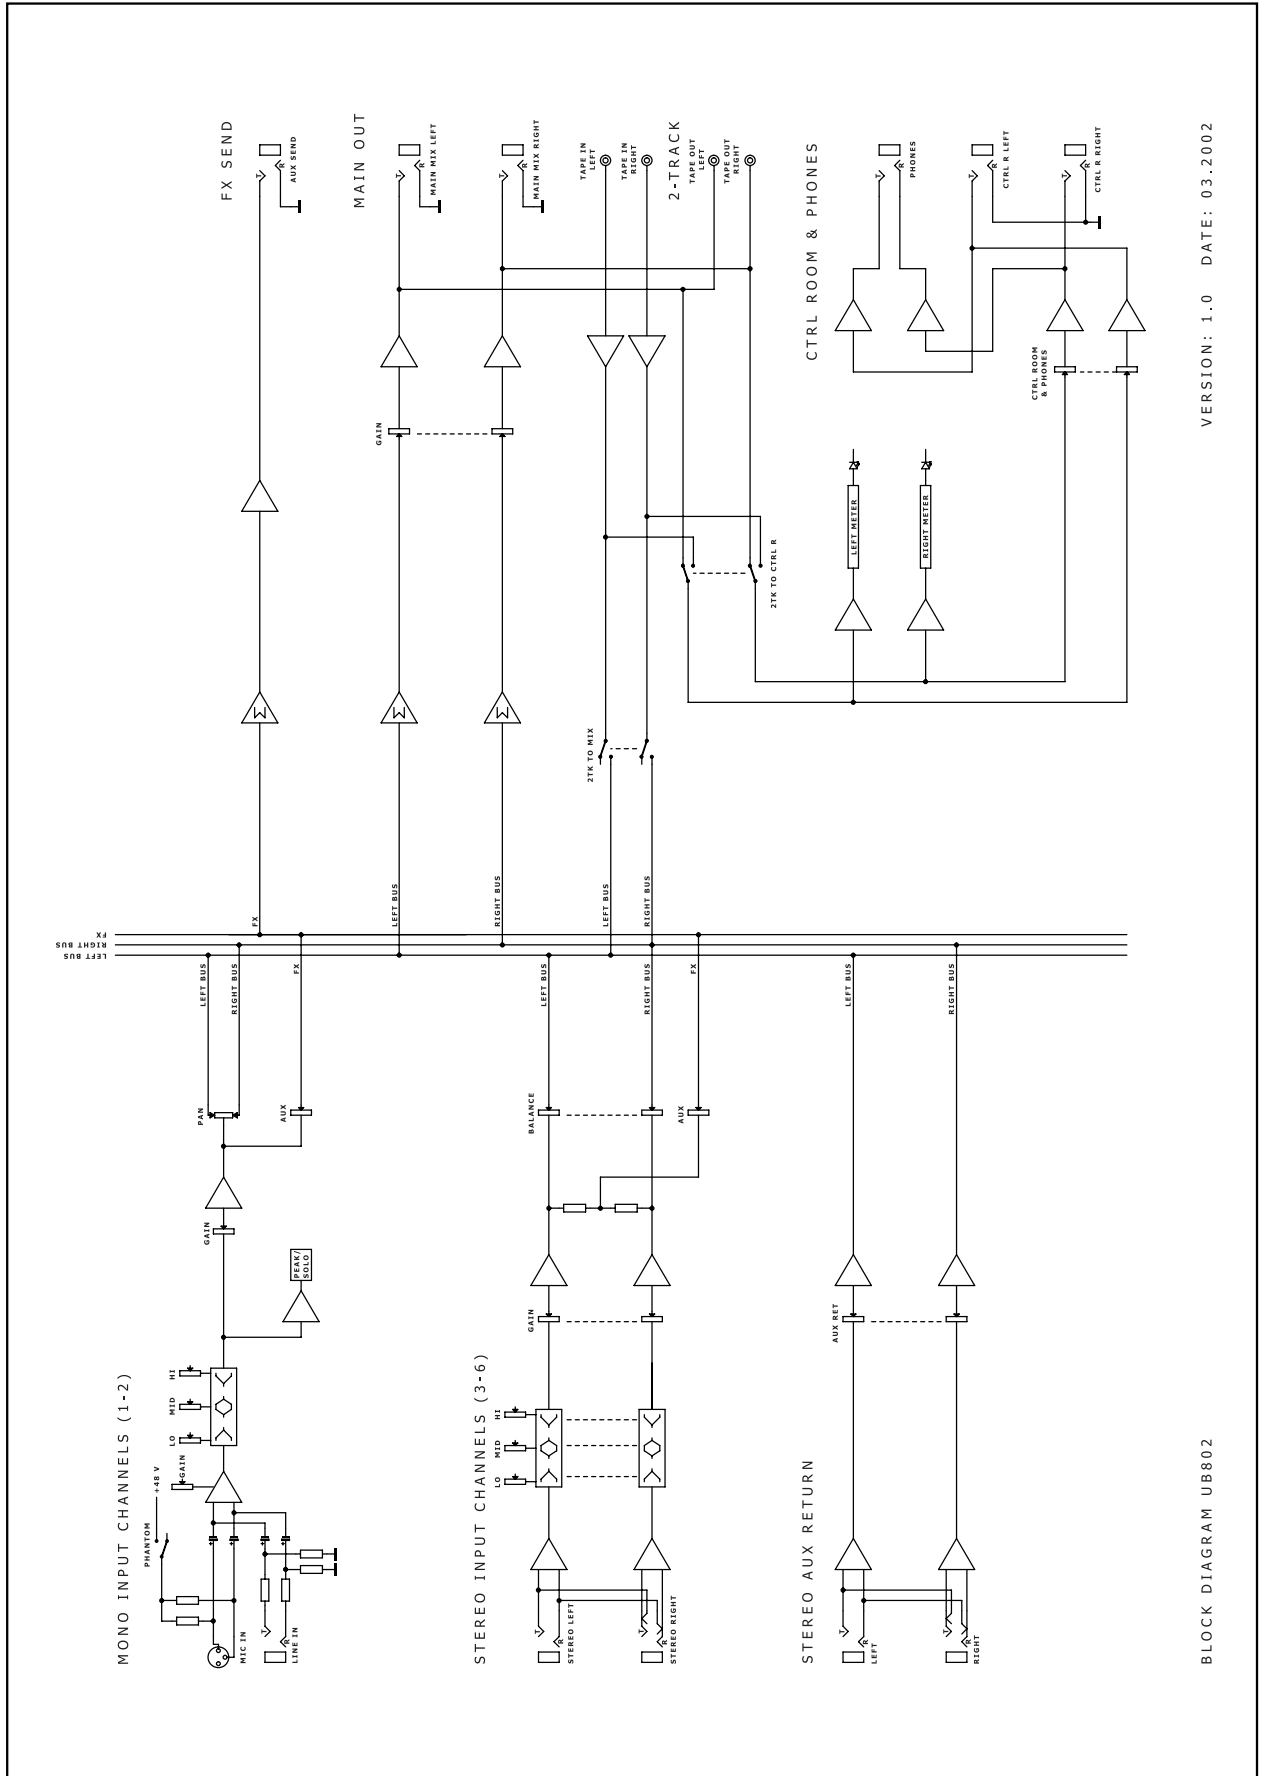

VERSION: 1.0 DATE: 03.2002

BLOCK DIAGRAM UB802

EURORACK UB802

SPECIFICATIONS

Mono inputs

Microphone inputs (IMP "Invisible" Mic Preamp)

Type	XLR, electronically balanced, discrete input circuit
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 Ω source resistance	-134 dB / 135.7 dB A-weighted
@ 50 Ω source resistance	-131 dB / 133.3 dB A-weighted
@ 150 Ω source resistance	-129 dB / 130.5 dB A-weighted

Frequency response	<10 Hz - 150 kHz (-1 dB), <10 Hz - 200 kHz (-3 dB)
--------------------	---

Gain range	+10 to +60 dB
Max. input level	+12 dBu @ +10 dB gain
Impedance	approx. 2.6 k Ω balanced
Signal-to-noise ratio	110 dB / 112 dB A-weighted (0 dBu In @ +22 dB gain)

Distortion (THD+N)	0.005% / 0.004% A-weighted
---------------------------	----------------------------

Line input

Type	1/4" TRS connector electronically balanced
Impedance	approx. 20 k Ω balanced 10 k Ω unbalanced
Gain range	-10 to +40 dB
Max. input level	30 dBu

Fade-out attenuation¹ (Crosstalk attenuation)

Main fader closed	90 dB
Channel muted	89.5 dB
Channel fader closed	89 dB

Frequency response

Microphone input to main out	
<10 Hz - 90 kHz	+0 dB / -1 dB
<10 Hz - 160 kHz	+0 dB / -3 dB

Stereo inputs

Type	1/4" TRS connector, electronically balanced
Impedance	approx. 20 k Ω
Max. input level	+22 dBu

EQ mono channels

Low	80 Hz / ± 15 dB
Mid	2.5 kHz / ± 15 dB
High	12 kHz / ± 15 dB

EQ stereo channels

Low	80 Hz / ± 15 dB
Mid	2.5 kHz / ± 15 dB
High	12 kHz / ± 15 dB

Aux send

Type	1/4" TS connector, unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Stereo aux return

Type	1/4" TRS connector, electronically balanced
Impedance	approx. 20 k Ω bal. / 10 k Ω unbal.
Max. input level	+22 dBu

Main outputs

Type	XLR, electronically balanced
Impedance	approx. 240 Ω bal. / 120 Ω unbal.
Max. output level	+22 dBu

Control room outputs

Type	1/4" TS connector, unbal.
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Headphones output

Type	1/4" TRS connector, unbalanced
Max. output level	+19 dBu / 150 Ω (+25 dBm)

Main mix system data²

Noise	
Main mix @ - ∞ ,	
Channel fader - ∞	-106 dB / -109 dB A-weighted
Main mix @ 0 dB,	
Channel fader - ∞	-95 dB / -98 dB A-weighted
Main Mix @ 0 dB,	
Channel fader @ 0 dB	-84 dB / -87 dB A-weighted

Power supply

Power consumption	17 W
-------------------	------

Mains voltage

USA/Canada	115 V \sim , 60 Hz, MXUL5 adapter
U.K./Australia	240 V \sim , 50 Hz, MXUK5 adapter
Europe	230 V \sim , 50 Hz, MXEU5 adapter
Japan	100 V \sim , 60 Hz, MXJP5 adapter

Dimensions

Dimensions (H x W x D)	1 5/6" / 1 1/2" (47 mm / 37 mm) x 7 2/5" (189 mm) x 8 2/3" (220 mm)
------------------------	--

Weight (net)	approx. 1.00 kg (2.21 lbs)
--------------	----------------------------

Measuring conditions:

- 1 kHz rel. to 0 dBu; 20 Hz - 20 kHz; line input; main output; unity gain.
- 20 Hz - 20kHz; measured at main output. Channels 1 - 4 unity gain; EQ flat; all channels on main mix; channels 1/3 as far left as possible, channels 2/4 as far right as possible. Reference = +6 dBu.

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

EURORACK UB802

The information contained in this manual is subject to change without notice. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER and EURORACK are registered trademarks. ALL RIGHTS RESERVED.

© 2002 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany

Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30
