ADN-W CASE Transport and charging case

FEATURES

- Transport and charging case with stackable modules for ADN-W system components
- Integrated charging compartments for 10 wireless conference units
- Modular case concept for maximum flexibility and user-friendliness
- Heavy-duty case, suitable for daily rental use

The ADN-W CASE transport and charging case contains three dedicated, stackable modules. The BASE module consists of a case bottom with wheels and a case lid, the UNITS module allows to charge and transport 10 complete wireless conference units and the CENTRAL module has padded compartments to accommodate all other system

components and accessories. Due to its modular design, the ADN-W CASE transport and charging case can be easily adapted to the size of the conference system.



ARCHITECT'S SPECIFICATIONS

The modular transport and charging case shall be capable of storing and charging the basic components of an ADN-W wireless conference system. Three stackable modules shall be available: one module consisting of a case bottom with wheels and a case lid, one module containing a charging case for charging and storing 10 wireless conference units with their battery packs and one module with padded compartments for accommodating all other system components and accessories. The charging case module shall feature a status display with 10 LEDs (one assigned to each charging compartment) for monitoring the overall charging process and a test button for checking the charge status of an individual conference unit. The charging case module shall operate on 100 to 240 VAC at 50 to 60 Hz. Power consumption shall be maximum 250 W. Charging voltage shall be 12 VDC, charging current shall be 1.6 A per charging compartment. The charging time for full charge shall be approximately 4 hours.

Continued on page 2

TECHNICAL DATA

Nominal input voltage	100 to 240 VAC
Mains frequency	50 to 60 Hz
Power consumption	max. 250 W
Charging voltage	12 VDC
Charging current	10 x 1.6 A
Charging time	approx. 4 h

ADN-W CASE BASE:	
Dimensions (W x H x D)case bottom: 931 x 203 x 6	317 mm
(36.65" x 7.99" x 24.29")	
case lid: 931 x 60 x 617 mi	n
Weight (unequipped)approx. 17 kg (37.48 lbs)	
Operating temperature range5 °C to 45 °C	
Operating relative humidity20 to 95 %	

DELIVERY INCLUDES

ADN-W CASE BASE case bottom with wheels and case lid

ADN-W CASE UNITS:

Dimensions (W x H x D)	931 x 283 x 617 mm
	(36.65" x 11.14" x 24.29")
Weight (unequipped)	approx. 21 kg (46,3 lbs)
Operating temperature range	5 °C to 45 °C
Operating relative humidity	20 to 95 %

DELIVERY INCLUDES ADN-W CASE UNITS charging case Mains cable, Quick guide

Continued on page 2



ADN-W CASE Transport and charging case

ARCHITECT'S SPECIFICATIONS

Operating temperature shall range from 5 °C to 45 °C (41 °F to 113 °F), operating relative humidity shall be from 20 to 95 percent.

Dimensions of the modules shall be as follows: case bottom with wheels: 931 x 203 x 617 mm (36.65" x 7.99" x 24.29"); case lid: 931 x 60 x 617 mm (36.65" x 2.36" x 24.29"); charging case: 931 x 283 x 617 mm (36.65" x 11.14" x 24.29"); transport case: 931 x 283 x 617 mm (36.65" x 11.14" x 24.29").

Approximate weights of the unequipped modules shall be as follows: case bottom with wheels and case lid: 17 kg (37.48 lbs); charging case: 21 kg (46.3 lbs); transport case: 13.6 kg (29.98 lbs).

The modular transport and charging case shall be the Sennheiser ADN-W CASE. The modules shall be as follows: the case bottom with wheels and case lid shall be the Sennheiser ADN-W CASE BASE; the charging case shall be the Sennheiser ADN-W CASE UNITS; the transport case shall be the Sennheiser ADN-W CASE CENTRAL.


TECHNICAL DATA

ADN-W CASE CENTRAL:

DELIVERY INCLUDES
ADN-W CASE CENTRAL transport case
Foam inlay



ADN-W CASE Transport and charging case

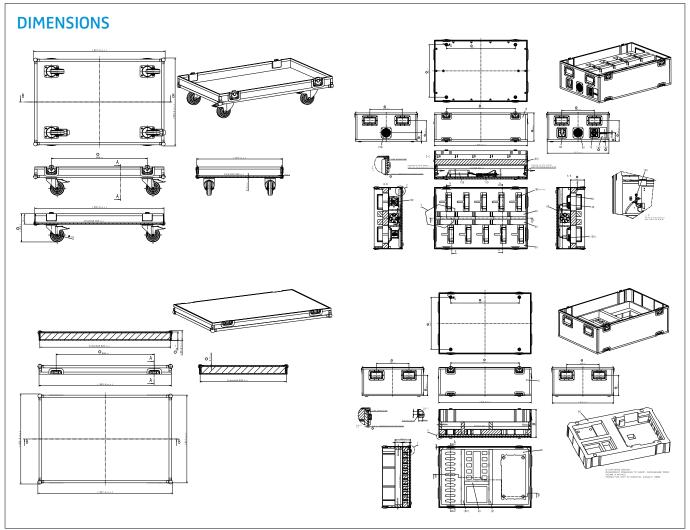

PRODUCT VARIANTS

ADN-W CASE BASE Art.No: 504959
ADN-W CASE CENTRAL Art.No: 504957
ADN-W CASE UNITS-EU Art.No: 505758
ADN-W CASE UNITS-UK Art.No: 505759
ADN-W CASE UNITS-US Art.No: 505757

Contact your local Service Partner:

Sennheiser electronic GmbH & Co. KG Am Labor 1, 30900 Wedemark, Germany www.sennheiser.com