

ANY SPOT[®]

WIRELESS MICROPHONE SYSTEMS

ECM SERIES

The ECM Wireless Receiver is an economical solution for a great wireless microphone system. The ECM has 16 selectable channels, IR Sync, Diversity Antennas mounted to the front of the rugged plastic casing. The ECM is available with a handheld, body pack with headset or lav, instrument cable, or with our popular guitar bud.

**IR
SYNC**

The ECMR can be used and will sync with either the HH52 or MBP52 transmitters. The HH52 has a gain control and an on/off switch. Both transmitters are powered by 2AA batteries. The MBP52 body pack transmitter has a 0/-10/Mic selector switch.


The ECM is available in two frequency ranges:
CODE D: 584~607MHz
CODE L: 655~679MHz



ECM OPTIONS

<p>HANDHELD ECMR/ HH52</p>	<p>LAV SYSTEM ECMR/ 52LV</p>	<p>HEADSET SYSTEM ECMR/ 52HS</p>	<p>GUITAR SYSTEM ECMR/ 52GTR</p>	<p>GUITAR BUD SYSTEM ECMR/ GBD</p>
---	---	---	---	---

**UPGRADE YOUR SYSTEM
WITH A GREAT
HEADSET MIC**

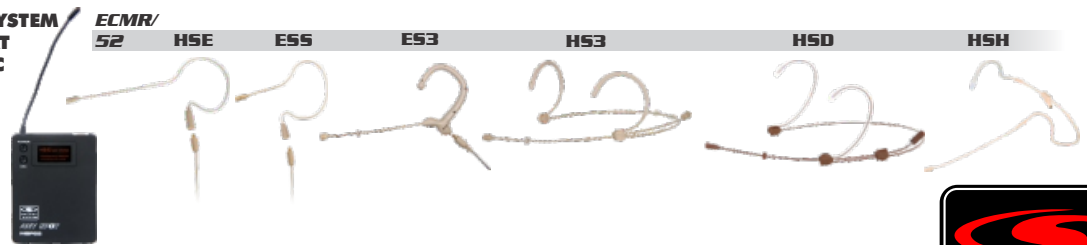

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



Specifications:

ECM System

Available Channels: 16

Frequency Range and Transmitter Output Level

Frequency Range: CODE D: 584~607MHZ

CODE L: 655~679MHZ

Transmitter Output Level: 10mW

Band: UHF

Operating Range Under Typical Conditions: 200' (61m)

Note: actual range depends on RF signal absorption, reflection, and interference

Audio Frequency Response: +/-3dB 60Hz~16KHz

Total Harmonic Distortion: +/-30KHz deviation 1KHz tone <1%

Dynamic Range: >90dB A-weighted

Operating Temperature: Range 14°F to 122°F (-10 C° to +50 C°)

Note: battery characteristics may limit this range

Receiver (ECMR)

Audio Output Level: (+/-30 KHz deviation, 1KHz tone)

XLR connector (into 600Ω load) -12dBV

1/4" connector (into 3KΩ load) -18dBV

Output Impedance: XLR connector 200Ω

1/4" connector 1KΩ

XLR output: Impedance balanced

Pin1: Ground (cable shield)

Pin2: Audio

Pin3: No Audio

Image Rejection: >90dB

Dimensions: 1.75" x 9.25" x 4.75"

(44.45mm H x 235mm W x 121mm D)

Weight: 0.85lbs (0.39 kg)

Power Requirements: 13.5 V DC at 300mA, supplied by external power supply.

Handheld Transmitter (HH52)

Max Audio input level: 0dBV

Gain (Sensitivity): +/-15dBV Control

High/Low: 10mW/1mW RF power switch.

Dimensions: 9.8" x 2.1" dia. (250mm x 53mm dia.)

Weight: 9.5oz. (270 g) (without batteries)

Power Requirements: 2 "AA" size alkaline or NiMH rechargeable batteries

Battery Life: About 8 Hours



ECMR



ECMR -BACK VIEW



HH52



MBP52



MBP52 -TOP VIEW

Bodypack Transmitter (MBP52)

Max Audio Input Level:

0 dBV to + 10dBV

Gain Adjustment Range: mic /0/-10dB

Input Impedance: 5KΩ

Dimensions: 3.3" x 2.6" x 1"

(85mm H x 65mm W x 24mm D)

Weight: 3.0oz (85 g) (without batteries)

Power Requirements: 2 AA Batteries alkaline or NiMH rechargeable batteries

Battery Life: About 8 Hours



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614
562.988.3447 FAX 562.989.3037

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180