

GENERAL INFORMATION

ETC's DMX/RDM Four-Port Gateway provides data distribution using the quality and reliability of ETC's network technology. Built for Net3 using industry-standard streaming ACN and sACN, the Four-Port Gateway unlocks the power of your networked system. The Four-Port Gateway also uses bidirectional Ethernet communication with other network devices to send or receive DMX512 and Remote Device Management (RDM) signals.

APPLICATIONS

- Roadhouses
- Touring
- University/professional theaters
- Convention halls
- Tech tables
- Stage manager panels
- System integration

FEATURES

- Distributes DMX and RDM data to any input/output device over Ethernet
- Supports Net3 protocol powered by ACN
- DMX/RDM Output/Input
- Simple configuration and service of each port
- LCD screen for labeling, status and configuration information
- Power and Network status indicators
- Power over Ethernet (PoE) or external DC power supply
- Configurable using Net3 Concert Software

ORDERING INFORMATION

Four-Port Gateways

| MODEL | DESCRIPTION |
|------------|--|
| N34G-4OUT | 4-port DMX/RDM Gateway - 4 Output |
| N34G-4IN | 4-port DMX/RDM Gateway - 4 Input |
| N34G-4TERM | 4-port DMX/RDM Gateway - 4 Terminal Strip |
| N34G-4RJ | 4-port DMX/RDM Gateway - 4 RJ45 Connectors |
| N34G-DIN | 4-port DMX/RDM Gateway - DIN-rail Mount |

Four-Port Gateway Components


| MODEL | DESCRIPTION |
|----------|---|
| N34G-FB | Gateway - includes 4 blank plates |
| N34G-MM | Input Module - Male 5-pin XLR |
| N34G-FM | Output Module - Female 5-pin XLR |
| N34G-TM | Terminal Strip Module - Input or Output |
| N34G-RJM | RJ45 Module - Input or Output |
| N34G-BM | Blank Module - For any unused port |

Four-Port Gateway Accessories

| MODEL | DESCRIPTION |
|-------------|---|
| N34G-FP4F | Gateway Front-Panel Kit - DMX 4 Out ¹ |
| N34G-4P2M2F | Gateway Front-Panel Kit - DMX 2 In 2 Out ¹ |
| PS-INTL | Gateway Universal Power Supply ² |
| N3GA-RM | Gateway Rack-Mount Kit |
| N3GA-HBU | Gateway Hanging-Bracket Kit with U-Bolt |

¹Does not include required Rack-Mount kit

²PS-INTL includes plugs for United States/Japan, Europe, and Great Britain. Compatible with Four-Port, Two-Port, Show Control and I/O Gateways.



SPECIFICATIONS

FUNCTIONAL

- Supports Net3/ACN (ANSI E1.31 and E1.17)
- Supports RDM (ANSI E1.20)
- Supports USITT DMX512-A (ANSI E1.11)
- USITT DMX512 and ANSI E1.11 DMX512-A compliant
- Advanced Input Patch (AIP) allows any incoming address to be associated with any sACN address
- Flexible Output Patch (FOP) allows a 512-address universe to begin at any output address
- Support for per-address- or per-universe-level priority

MECHANICAL

- Menu button for backlight/paging control
- Backlit LCD display for identification and status reporting and basic configuration.
- Rack-Mount/Portable/Touring
 - Fabricated from 16-gauge cold-rolled steel
 - Black, Fine-textured, powder-coat finish
 - C-clamp and U-bolt hardware available
 - Half 19" equipment rack width allows for up to eight DMX ports in 1U height
- DIN-rail
 - Extruded aluminium enclosure
 - Mounting complies with DIN43880 (35/7.5 rail)
 - DIN installation enclosure available
- Network, power and data activity LED indicators
 - Blue power indicator, green network activity indicator
 - Bi-color DMX activity indicator
- Front-panel RJ45 for connection to lighting network
- Reset button for hard reset or forced reboot

PROCESSOR

- Maximum delay time from input to output not greater than one packet time
- Selectable DMX refresh rate with a maximum at least 40Hz

ENVIRONMENTAL

- Ambient operating temperature: 0° to 40°C (32° to 104°F)
- Operating humidity: 5% - 95% non-condensing
- Storage temperature: -40° to 70°C (-40° to 158°F)

ELECTRICAL

- Compliant with IEEE 802.3i for 10BASE-T, 802.3u for 100BASE-TX and 802.3af for Power over Ethernet
- Optional 8-28VDC power input for use with non-PoE systems
- Maximum five-watt current draw
- CE compliant and ETL listed

MODULAR DMX PORTS (NON DIN-RAIL MODELS)

- Supports up to four DMX ports independently configurable as inputs or outputs
- Module options include:
 - XLR 5-Pin Male DMX input connector
 - XLR 5-Pin Female DMX output connector
 - RJ45 DMX connector
 - Terminal strip connector
- Fully optically-isolated input from the Gateway electronics
- Withstands fault voltages of up to 250VAC
- Integrated DMX/RDM termination

SPECIFICATIONS

CONFIGURATION

- Configuration provided by Net3 Concert
 - Supports up to 512 DMX addresses per port
 - Supports up to 63,999 Streaming ACN universes
- Up to 2,048 channels in combination of data input or output
- DMX data input or output configurable by user
- Multiple outputs of a single DMX universe (DMX splitter) from a single Gateway
- Supports discrete DMX universe outputs per port
- Multiple sources may be combined to the network with each source or address allowed an independent priority
- Individual port start address and offset
- User-configurable labeling

ADDITIONAL INFORMATION

DMX512

Often shortened to DMX (Digital Multiplex), this communication protocol is used mainly to control dimmers and multi-parameter fixtures. A universe of DMX is defined as 512 channels. DMX sends a nearly continuous stream of level information for each control channel. It is a form of RS-485 digital serial communication.

RDM

Remote Device Management (ANSI E1.20) is a protocol enhancement to DMX512 that allows low-speed bidirectional communication between a system controller and attached RDM devices over a standard DMX line. This protocol will allow remote configuration, status monitoring, and management of devices.

sACN

Streaming ACN (ANSI E1.31), sends DMX-style control over TCP/IP networks. It provides a fast and efficient mechanism to transport the well-understood DMX protocol over Ethernet using an industry-standard protocol.


ACN

Architecture for Control Networks (ANSI E1.17) is a standard for high-speed bidirectional communication over TCP/IP on Ethernet network infrastructure. ACN is an open suite of protocols used between network devices for the purposes of greater and more adaptive control.

NET3

ETC's enhanced implementation of the standard ACN Protocol Suite (ANSI E1.17 and E1.31) including additional communication protocols for specialized applications and support of legacy systems.

TYPICAL SYSTEM RISER

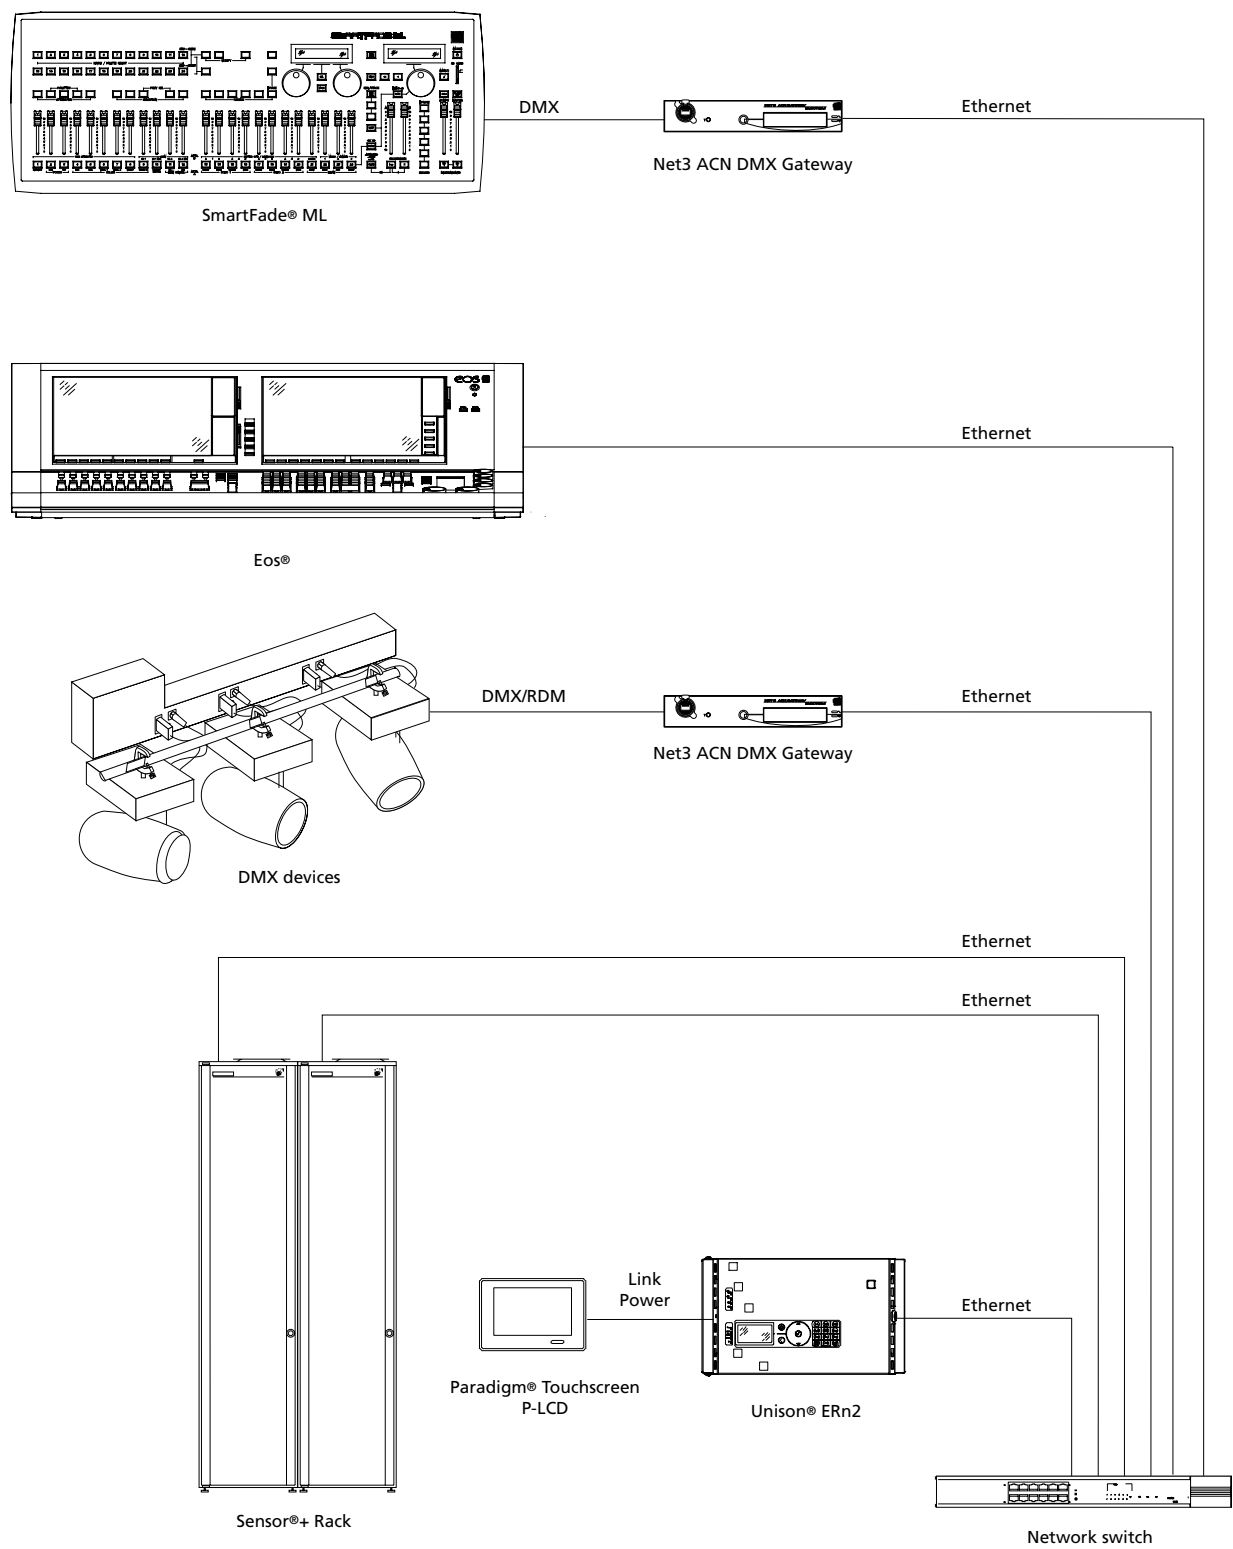

PHYSICAL

Net3 Four-Port Gateway Dimensions

| MODEL | HEIGHT | | WIDTH | | DEPTH | |
|--------------------------|--------|-----|--------|-----|--------|-----|
| | inches | mm | inches | mm | inches | mm |
| Gateway - Standard | 1.71 | 44 | 8.5 | 216 | 8.2 | 208 |
| Gateway - DIN-Rail Mount | 4.13 | 105 | 8.03 | 204 | 1.61 | 41 |

Net3 Four-Port Gateways

| MODEL | WEIGHT | | SHIPPING WEIGHT | |
|------------|--------|-----|-----------------|-----|
| | lbs | kgs | lbs | kgs |
| N34G-4OUT | 6 | 2.7 | 8 | 3.6 |
| N34G-4IN | 6 | 2.7 | 8 | 3.6 |
| N34G-4TERM | 6 | 2.7 | 8 | 3.6 |
| N34G-4RJ | 5.5 | 2.5 | 8 | 3.6 |
| N34G-DIN | | | | |

Bundles come complete with the Gateway, Modules, Rack-Mount Kit and Universal Power Supply.


Net3 Four-Port Gateway Components

| MODEL | WEIGHT | | SHIPPING WEIGHT | |
|----------|--------|-----|-----------------|-----|
| | lbs | kgs | lbs | kgs |
| N34G-4B | 3 | 1.4 | 7 | 3.2 |
| N34G-MM | 0.3 | 0.1 | 1 | 0.5 |
| N34G-FM | 0.3 | 0.1 | 1 | 0.5 |
| N34G-TM | 0.4 | 0.2 | 1 | 0.5 |
| N34G-RJM | 0.4 | 0.2 | 1 | 0.5 |

Net3 Four-Port Gateway Accessories

| MODEL | WEIGHT | | SHIPPING WEIGHT | |
|---------------------------|--------|-----|-----------------|-----|
| | lbs | kgs | lbs | kgs |
| N34G-FP4F1 ¹ | 1.1 | 0.5 | 2 | 0.9 |
| N34G-FP2M2F1 ¹ | 1.1 | 0.5 | 2 | 0.9 |
| N3GA-PS | 0.5 | 0.2 | 1 | 0.5 |
| N3GA-RM | 1.5 | 0.7 | 2 | 0.9 |
| N3GA-HBU | 0.8 | 0.4 | 1 | 0.5 |

¹ Does not include required Rack-Mount Kit

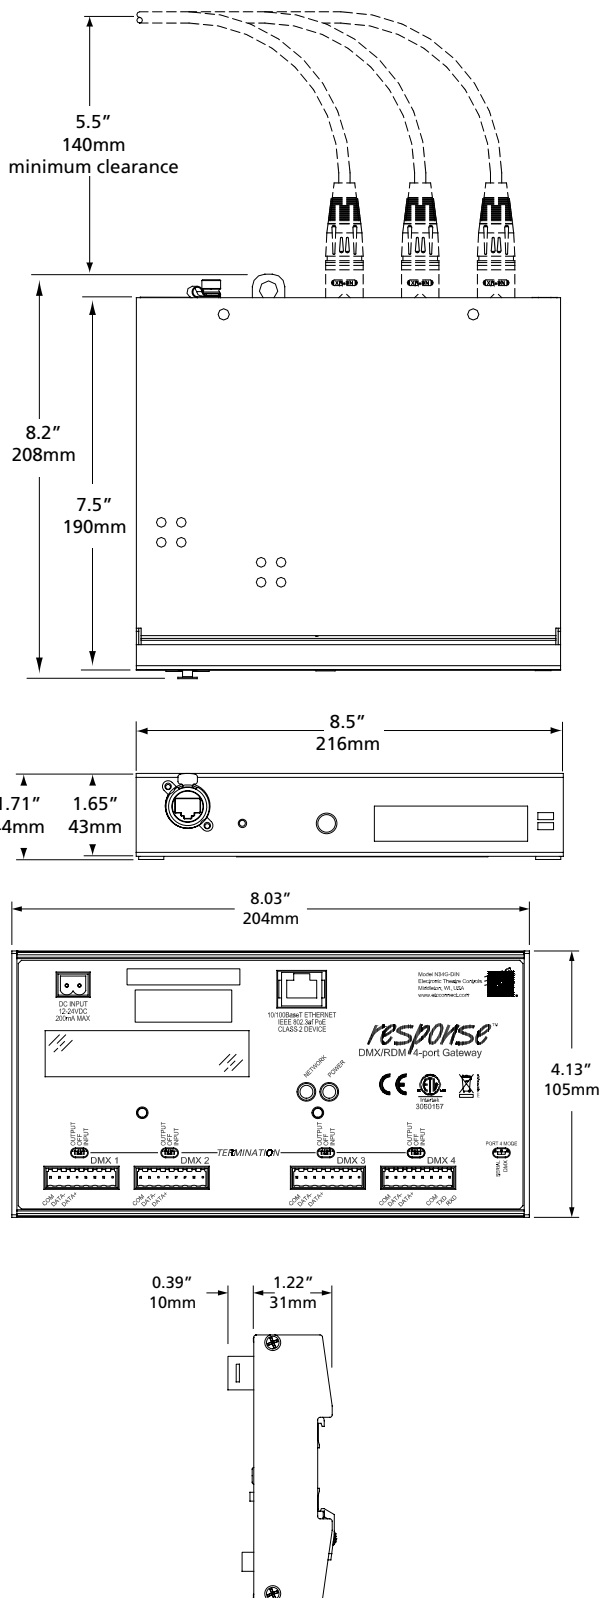

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736

London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000

Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0)20 8752 8486

Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325

Web • www.etcconnect.com • Copyright©2016 ETC. All Rights Reserved. All product information and specifications subject to change. 4260L1001 Rev. I USA 09/16