

MEGAVOX PRO

PORTABLE VOICE AMPLIFICATION SYSTEM

6-YEAR WARRANTY!

Now featuring 16 channel UHF diversity wireless by Anchor Audio

True AC/DC 110/220 switchable power supply

Reach crowds of 3,000+

Signal Alert Button

Powerful amplifier and horn driver combine for 126 db output

Weighing only 15 pounds, it's easy to carry

Built-in rechargeable battery runs up to 10 hours on a charge

High-efficiency re-entrant horn driver

Durable injection-molded case

Speaker stand receptacle molded into bottom

All models include dynamic microphone with coil cord

Speaker output powers optional companion speaker

MADE IN THE USA!



(MEGA-6000U2 Back Panel Shown)

MODELS

MEGA-6000

Battery-powered PA system with wired microphone and built-in rechargeable battery

MEGA-6000U1*

Battery-powered PA system with wireless receiver installed

MEGA-6000U2*

Battery-powered PA system with 2 wireless receivers installed

*order transmitter/microphone separately

WIRELESS MICS

WH-6000

Handheld wireless microphone/transmitter

WB-6000

Wireless body-pack transmitter (order mic separately)

CM-60

CollarMic microphone for use with WB-6000 transmitter

HBM-60

Headband microphone for use with WB-6000 transmitter

LM-60

Lapel microphone for use with WB-6000 transmitter

ACCESSORIES

MEGA-6001

Unpowered companion speaker

MIC-90P

Professional dynamic, cardioid pattern handheld mic w/ 1/4" phone plug

SS-550

Heavy-duty speaker stand

HC-1650MV

Custom travelling hard case

NL-MEGA

Storage cover

RC-6000

Replacement AC charger/adaptor

MEGA-BAT

Replacement battery


SPECIFICATIONS

MegaVox Pro

Rated power:	22 watts
Max SPL @ rated power:	126 dB @ 1 meter
Frequency response:	400 Hz - 10 kHz
Line input:	Hi-Z, unbalanced, 1/4"-phone
Mic input 1:	Lo-Z, unbalanced, 1/4"-phone (used for wireless on MEGA-6000U1)
Mic input 2:	Lo-Z, unbalanced, 1/4"-phone
Line output (post fader):	Lo-Z, 1/4"-phone
Speaker output:	8Ω, unswitched, 1/4"-phone
Battery type:	12 volt rechargeable, 5.4 AH
Operation time:	6 -10 hours (dependent upon use)
Charger (Anchor RC-6000):	18V DC/universal input (100Vac - 240Vac, 50 - 63Hz)
Dimensions (HWD):	13 x 9 x 14", 33 x 23 x 36 cm
Weight:	15 pounds, 6.8 Kg.

MegaVox Pro Daisy-Chain

Simple line-out to line-in connection expands your coverage

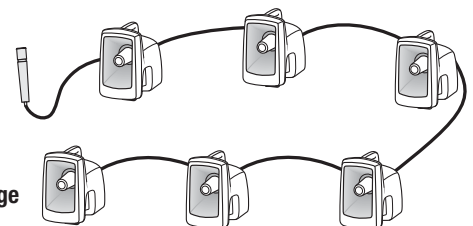

Specifications subject to change without notice.

Anchor Audio, Inc. • Torrance, California



(310) 784-2300 • www.anchoraudio.com