



GENERAL INFORMATION

The ETCnomad Puck lighting controller is a full-featured mini-computer with an embedded ETCnomad lighting control key capable of running Eos, Element™ and Cobalt applications. It provides lighting control with conventional and moving lights, media servers used with either Eos or Cobalt operating systems in primary, backup, client and offline environments.

Optional fader wings, programming wings, X-keys and compatibility with USB–MIDI panels allow extended and customizable control.

FEATURES

- 256, 512, 1024, 1536 or 2048 outputs
- The ETCnomad Puck 256 lighting controller makes an ideal techtable RVI
- Operates in stand-alone, primary, backup and client environments
- When connected as a client, output capacity is determined by the system to which it is connected
- Net3™/ACN/sACN and Artnet Ethernet lighting protocols
- DMX/RDM via ETC Gadget™
- DMX/RDM via Net3 DMX/RDM Gateways
- Two HDMI ports
- Three USB ports
- OSC Transmit/Receive
- UDP Transmit/Receive

See Cobalt, Eos and Element datasheets and operation manuals for ETCnomad lighting control features

ACCESSORIES

- 2x10 Universal Fader Wing
- 2x20 Universal Fader Wing
- Eos Programming Wing
- Cobalt Programming Wing
- Congo jr™ Master Playback Wing (Cobalt only)
- RFR/aRFR/iRFR remote controls
- Alphanumeric keyboard
- USB mouse

ORDERING INFORMATION

ETCnomad Puck Lighting Controller


MODEL	DESCRIPTION
ETCnomad Puck256	ETCnomad Puck 256 Lighting Controller Kit, 256 outputs and RVI
ETCnomad Puck512	ETCnomad Puck 512 Lighting Controller Kit, 512 outputs
ETCnomad Puck1024	ETCnomad Puck 1024 Lighting Controller Kit, 1,024 outputs
ETCnomad Puck1536	ETCnomad Puck 1536 Lighting Controller Kit, 1,536 outputs
ETCnomad Puck2048	ETCnomad Puck 2048 Lighting Controller Kit, 2,048 outputs
ETCnomad512 Up	Output Upgrade - 256 to 512 outputs
ETCnomad256 Up	512 Outputs Upgrade (one universe)
ETCnomad256to1024	Upgrade - 256 to 1024 Outputs

IMPORTANT ETCNOMAD LIGHTING CONTROLLER ORDERING INFORMATION

To increase the capacity of an ETCnomad Puck lighting control system with fewer than 2048 outputs, customers can order additional 512 output upgrades (up to two upgrades are possible on a 1024 output system). The ETCnomad Puck 256 lighting controller can be upgraded to ETCnomad Puck 512 or 1024 lighting controller with a separate part number.

A single universe of output may be distributed using an ETC Gadget USB to DMX/RDM converter. Up to four gadgets are supported. Additional or all outputs may be distributed via Ethernet protocols directly (Net3™/ACN/sACN, or ArtNet) or by compatible Ethernet-distribution hardware, such as Net3 DMX/RDM Gateways. The Gadget and network equipment must be purchased separately from the ETCnomad Puck lighting control kit.

Note: The ETCnomad Puck lighting controller does not support ETCNet2™/EDMX protocol.




ORDERING INFORMATION

ETCnomad Puck Accessories

MODEL	DESCRIPTION
FADW 2x10(CB)	Fader Wing 2x10, Ion® Black or Congo Blue
FADW 2x20(CB)	Fader Wing 2x20, Ion Black or Congo Blue
MASTERWING	Congo jr Master Playback Wing (Cobalt only)
Eos PGW	Eos Programming Wing
Cobalt PGW	Cobalt Programming Wing
Net3-RVI3	Net3 Remote Video Interface 3 (RVI3)
Net3 RVI	Net3 Remote Video Interface (RVI)
Net3-RFR	Net3 Radio Focus Remote (RFR)
GADGET	ETC Gadget USB to DMX/RDM Converter

ETCnomad lighting control software is available for download from www.etconnect.com/NomadLightingController
The ETCnomad Puck lighting controller does not support the ETCNet2™/EDMX protocol.

PHYSICAL

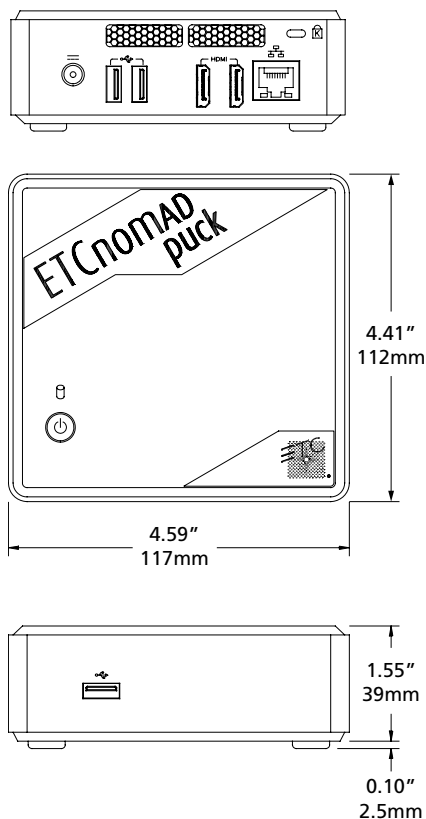


ETCnomad Puck Lighting Controller Shipping Dimensions

MODEL	WIDTH		HEIGHT		DEPTH	
	inches	mm	inches	mm	inches	mm
ETCnomad Puck	15.5	394	3	77	11.75	299

ETCnomad Puck Lighting Controller Shipping Weights

MODEL	WEIGHT		SHIPPING WEIGHT	
	lbs	kgs	lbs	kgs
ETCnomad Puck	2	.91	3.5	1.59



Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736

London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000

Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +39 (06) 32 656 990

Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325

Web • www.etconnect.com • Copyright©2015 ETC. All Rights Reserved. All product information and specifications subject to change. 4380L1002 Rev. E USA 08/2015