

RANE SL4



4 decks and 2 computers with your favorite mixer

The SL4 connects up to four vinyl turntables or CD players to one or two laptops, using the mixer of your choice.


The SL4 is the first standalone DJ interface with two USB ports for seamless DJ changeover and back-to-back performances. Get superior sound with high quality 96 kHz, 24-bit audio. Built-in galvanic isolation between USB and audio, with turn on/off muting, ensures that only the purest interference-free audio signal is heard. Low-latency ASIO and Core Audio drivers allow using the SL4 as a studio production tool with multiple third-party software applications.

The SL4 includes four 12" Serato Control records and four Control CDs, two USB cables, and RCA audio cables to your mixer. An international power supply with country adaptors is included to insure continuous performance when unplugging USB cables between DJs.

Galvanic isolation guarantees audio is actively isolated from USB and power. The RIAA phono equalization is extremely accurate, for the best sound from your vinyl. 3Vrms inputs are accepted from CD decks without clipping, and outputs 3Vrms go to the mixer without clipping; other interfaces can't handle this much signal. A list of supported MIDI controllers is at serato.com.

SL4 feature enhancement summary:

- Supports up to four turntables or CD decks switchable in any combination.
- Two high-speed USB ports for two DJs for uninterrupted performances.
- Fifth Aux Input for session recording in Serato DJ or other audio program.
- Fifth Aux Output assignable to the Serato DJ SP-6 Sample Player.
- 48 kHz and 96 kHz sample rate switch on the SL4 rear panel.
- 10-in 10-out USB sound card with any software supporting ASIO or Core Audio.
- External power supply included to provide Direct Thru without USB power from a computer.

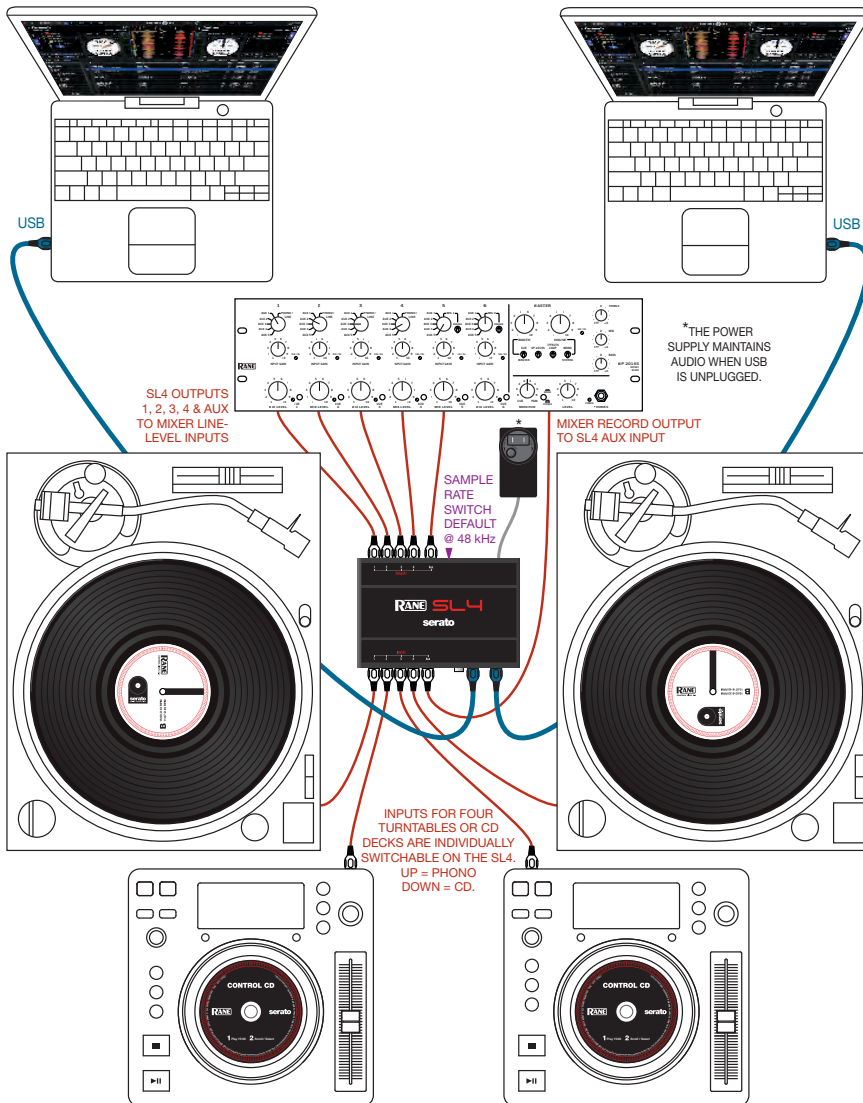

serato DJ

RANE

The SL4 includes Serato DJ with 4 Serato Control Vinyl and 4 Serato Control CDs.

SL4 Specifications

All specifications typical unless otherwise stated	
Computer interface	USB 2.0 High Speed
USB Power Requirement	500 mA, 5.0 Volts
USB Audio Channels	Ten Record and Ten Playback
External Power Supply Included	100-240 VAC input, 7.5 VDC output
Converters	24-bit / 48 kHz or 96 kHz (rear panel switch)
.....DAC Dynamic Range	104.5 dB, A-weighted
.....ADC Dynamic Range	103 dB, A-weighted
.....Dynamic Range	101 dB A-weighted analog in to analog out
THD+N	0.007% at 1 kHz, 20 Hz to 20 kHz BW
Frequency Response	-0.6 dB @ 20 Hz, -0.03 dB @ 20 kHz
Inputs	Inputs 1-4 individually Phono / Line switchable
.....Aux Input	Line Level only
.....Gain	Unity
.....Maximum Input / Output	3 Vrms @ 1 kHz
.....Switched Phono Input Maximum	70 mV rms @ 1 kHz
Kensington Security Slot	Both sides of unit
Unit: Conformity	CE, FCC
.....Size	7.25" x 5" x 1.7" (18.4 x 12.6 x 4.3 cm)
Shipping Size	14" x 14" x 4" (36 x 36 x 10 cm)
.....Weight	6 pounds (3 kg)

ASIO & Core Audio Drivers

These included drivers allow the SL4 to act as a 10-in 10-out USB external sound card for use with multiple third-party software clients supporting Core Audio (Mac) or ASIO (Windows).

Serato DJ

Rane is pleased to announce that the SL4 which previously included Serato Scratch Live software is now fully supported by Serato DJ software. DJs currently using Serato Scratch Live have the option to migrate to the new and improved Serato DJ free of charge. If you're familiar with Scratch Live, the transition to Serato DJ is easy and intuitive.

Computer Requirements

Before purchasing a Mac or PC, please check serato.com for best results with the latest version of Serato DJ.

Included in the Box

The Rane SL4 is only sold as part of a complete package. The box includes:

- SL4 hardware interface
- 4 rubber feet for the SL4
- 2 USB cables
- 6 stereo RCA cables
- Printed color manuals
- 4 Control Vinyl Records
- 4 Control CDs
- Serato DJ software install disc
- External universal power supply with country adaptors.



Serato Control

Mix files from your computer hard drive using Serato Control Vinyl, Serato Control CD or approved USB Controllers. The Serato Control Vinyl and Control CDs each contain the Serato NoiseMap™ Control Tone, a unique control signal which allows Serato DJ or Scratch Live to track the motion of the record, simulating the same movement with digital audio.

serato.com

Features are being added and improved, and the latest version of Serato DJ or Scratch Live is a free download. The Forum at serato.com is the best place for technical support and performance tips from thousands of other DJs.

whitelabel.net

The Serato Whitelabel Delivery Network is a unique system that allows record labels to digitally deliver promotional releases directly to Serato DJs. To download Whitelabel audio files and sign up for updates on the latest promotional releases, visit whitelabel.net.

dj.rane.com

Visit the Rane DJ website for the most up-to-date information on all Rane hardware, manuals, accessories, support, community, newsletter and the blog.

© 2016 Rane Corporation. Accelerated-Slope, FlexFX and Active Crossfader are trademarks of Rane Corporation. All rights reserved. Windows 7, 8, and 10 are either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. Apple, Mac, Macintosh and iTunes are trademarks of Apple Computer, Inc., registered in the US and/or other countries. Serato DJ and Scratch Live are trademarks of Serato. Lexan is a registered trademark of General Electric. iZotope is a trademark of iZotope, Inc. in the United States and other countries.

6-2016