

zylight

The F8-200

INTELLIGENT LED LIGHTING

BRIGHTER
✓
The Flat Fresnel



- High CRI, High TLCI LED Light Engine
- Thin, Lightweight & Award Winning Design
- Water Resistant IP54 Rated
- 3200K or 5600K Versions
- Variable Spot/Flood
- Single Shadow Beam Shaping
- Uses Two 14.4v Batteries or Worldwide AC
- Bright - Compact - Powerful



www.zylight.com | sales@zylight.com

Z
zylight

zylight

The F8-200

BRIGHTER The Flat Fresnel

Tame The Sun

Don't lose your talent in the sunlight. The F8-200 LED Fresnel has brighter output than a 400-watt HMI and can use your existing standard camera batteries. The water resistant (IP54) F8-200 keeps its cool even in bad weather, and delivers natural looking light.

The "Brighter Flat Fresnel" also lets you travel light – it collapses to less than five inches thick (12cm) for easy transport. Welcome to the new standard of portable, powerful, quality LED lighting.

F8-200 Fresnel Specifications

Mechanical

Lens Diameter: 8" [200 mm]
Size: 15" x 12.6" x 4.6"
[380 x 320 x 120 mm]
Weight: 10.25 lbs. [4.7 kg]
Mounting: Standard Yoke
Pole Yoke Mount (Optional)
Weather Resistance: IP54

Electrical



Input: 24 - 32 VDC, 4 - Pin XLR, (2) 14.4v,
RawPower Battery Module (Optional)
Power: 200W (10.0 Amps @ 24VDC)
Cooling: Active "Silent Running" Fan

Output

Beam Angle: Variable 16° - 70°
Dimming: 0 -100%
Control: Rear Panel Local,
ZyLink Wireless, DMX512A.
Color Temperature: F8-T (3200K), F8 - D (5600K)
LED Life: 50,000 hrs. minimum.



F8-200-D

Spectrum




F8-200-T

Spectrum



Photometric Data

F8-200

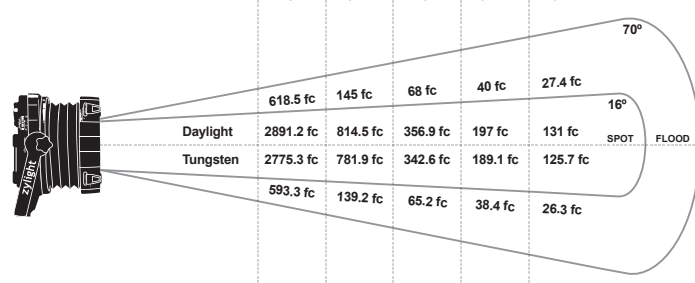

Form No. F8-200/1217

Specifications may be subject to change without prior notice. Refer to www.ushio.com for the most current product specifications.

Z
zylight