iO10

2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

- 2 way full range loudspeaker for portable PA and installation applications
- 2,500 Watt power featuring KLARK TEKNIK Class-D technology
- KLARK TEKNIK Digital Signal Processing for total system control
- Speaker modelling includes accurate models of industry standard speakers
- SCC (Spatial Contour Control) compensates frequency response in relation to physical speaker placement
- ULTRANET digital audio networking connects to mixers and other sources
- 10" low frequency driver with low mass voice coil for improved transient response
- High temperature 1" compression driver with copper-clad aluminium voice coil for extended high frequency reproduction
- Fully featured user interface with LCD display for ease of navigation
- PC remote control software downloadable at turbosound.com
- Lightweight fibre glass reinforced composite enclosure
- Rugged powder coated perforated steel mesh grille
- Dual angle pole mount for accurate audience coverage



The 2,500-Watt iQ10 is a powered two-way loudspeaker ideally suited for a wide range of portable and fixed installation, music and speech sound reinforcement applications. The driver complement includes an 10" low frequency driver with a low mass voice coil for improved transient response, and a high temperature 1" compression driver with copperclad aluminium voice coil for extended high frequency reproduction.



Equipped with a very efficient and lightweight two channel KLARK TEKNIK Class-D power amplifier, the iQ10 provides an impressive 2,500 Watts of output power. A high degree of control over the loudspeaker system's performance is managed by a sophisticated, but easy to use KLARK TEKNIK Digital Signal Processor (DSP), which provides dynamic EQ for remarkable full range response at low volume levels, and transparent limiting for the utmost clarity at high output levels – and long-term reliability. iQ10's advanced DSP speaker modelling presets include detailed and accurate models of some of the audio industry's most-respected loudspeakers.

KLARK TEKNIK also developed a highly versatile Spatial Contour Control (SCC) DSP function, which allows the user to easily optimise the iQ10's frequency response for the physical speaker placement. This advanced functionality provides frequency compensation for stand, floor, wall or ceiling placement, much like the adjustments commonly found on studio reference monitors.



iQ10

2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

- Multiple internal rigging points for installation applications
- Mains input and link output on Neutrik powerCON* connectors
- 10-Year Warranty Program*
- Designed and engineered in the U.K.

On the rear panel amplifier module, you will find a fully featured user interface consisting of an LCD display, the Channel A and B gain controls, and a single rotary encoder for intuitive access to level, EQ, Speaker modelling, SCC, Subwoofer Integration and Feedback Control (FBI). In addition to the two combination balanced XLR/jack inputs, balanced XLR outputs for each of the two independent channels, and a Mix Out XLR connector, the iQ10 features a mic/line switch and level control with signal present LED on each channel.

The iQ10 also features our proprietary ULTRANET technology, which allows the use of CAT5 cables for transmitting pristine multi-channel audio signals and other information between ULTRANET-enabled products, such as digital mixers and personal monitor systems. This digital distribution networking not only eliminates the potential for RFI and crosstalk so common to analogue methods, but also significantly reduces the setup or installation time required. An onboard USB port provides access for remote control of the iQ10 via PC computer, as well as DSP and speaker modelling firmware updates.

The lightweight fibre glass reinforced composite enclosure is fitted with a rugged powder coated perforated steel mesh grille and multiple internal rigging points for permanent installations. The iQ10 is also fitted with a dual angle pole mount socket, allowing the enclosure to be pole mounted straight on, or raised and angled downwards for optimal audience coverage. Mains power input and link output is provided via Neutrik powerCON* connectors.



iQ10

2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking




You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own MUSIC Tribe factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous Warranty program.



2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking


Frequency Response Sensitivity 1 W / 1 m

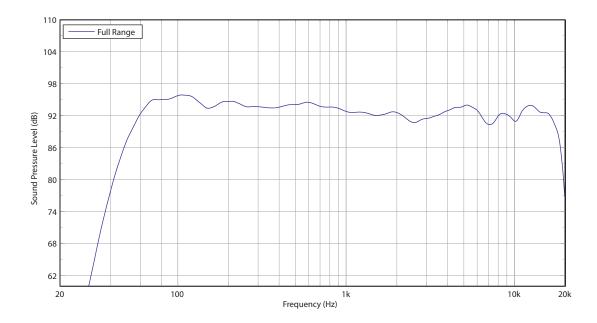




2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

Horizontal Beamwidth

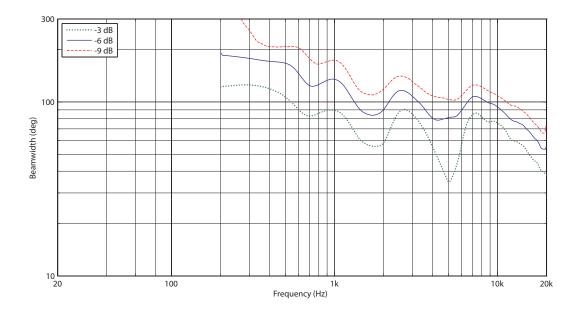


Vertical Beamwidth

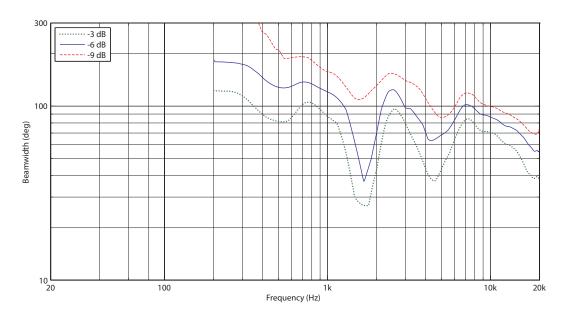






2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking


Horizontal Polar Plots

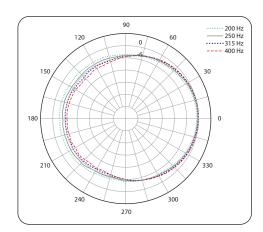





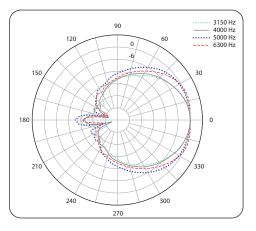


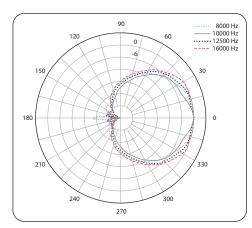






2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking


Vertical Polar Plots

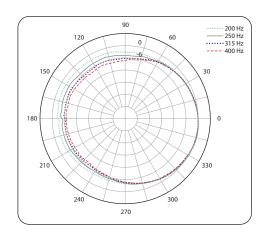



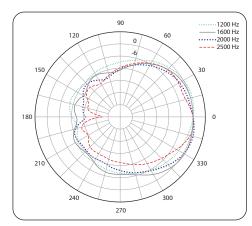

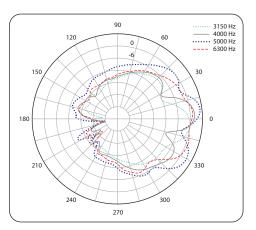


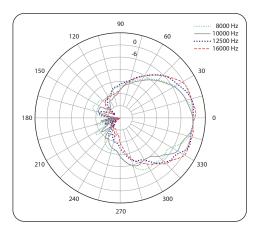



2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

Dimensions

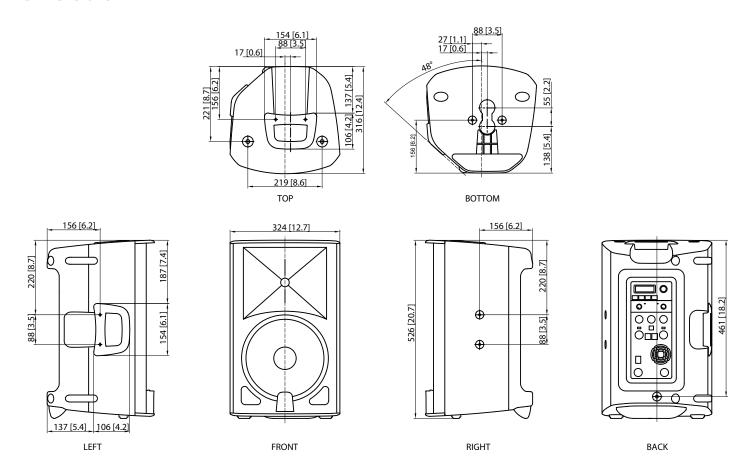




2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

Mounting and Rigging

The cabinet is fitted with M10 x 3 internally-threaded rigging points that allow it to be rigged with optional shoulder eyebolts in different configurations in permanent installations. The simplest method of rigging is to use the two M10 rigging points on the top, and a single pull-back rigging point on the rear panel. Adjustment of the length of the rear cable allows the cabinet to be angled for optimum room coverage.


The cabinet is fitted with a dual angle pole mount socket, allowing the enclosure to be pole mounted straight on, or raised and angled downwards for optimal audience coverage

The optional iQ10-WB wall bracket allows the cabinet to be surface mounted horizontally and vertically, and angled for optimum positioning and coverage.

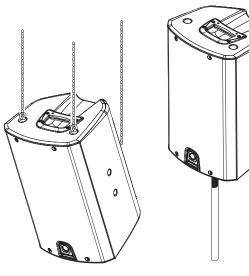

Suspension using M10 shoulder eyebolts.





iQ10-WB wall bracket: horizontal mounting.



iQ10-WB wall bracket: vertical mounting.



Mixer section

2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking

Technical Specifications

SO Hz - 20 kHz - 10 dB	System	
Nominal dispersion 90° H x 60° V @ −6 dB points Maximum SPL 129 dB peak Crossover type Active Transducers 1 x 10" (256 mm) LF driver 1 x 1" (25.4 mm) HF compression driver Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line + 4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Frequency response	55 Hz – 18 kHz ±3 dB
Maximum SPL Crossover type Active Transducers 1 x 10" (256 mm) LF driver 1 x 1" (25.4 mm) HF compression driver Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Haximum input level 2 x XLR Linked to input XLR, balanced Output A / B XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Rotary push-encoder		50 Hz — 20 kHz -10 dB
Crossover type Transducers 1 x 10" (256 mm) LF driver 1 x 1" (25.4 mm) HF compression driver Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level -21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Rotary push-encoder	Nominal dispersion	90° H x 60° V @ -6 dB points
Transducers 1 x 10" (256 mm) LF driver 1 x 1" (25.4 mm) HF compression driver Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level -21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Maximum SPL	129 dB peak
1 x 1" (25.4 mm) HF compression driver Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls	Crossover type	Active
Limiter Independent HF, LF, peak and rms Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls DSP Rotary push-encoder	Transducers	1 x 10" (256 mm) LF driver
Amplifier Maximum output power* 2,500 W Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls Rotary push-encoder		1 x 1" (25.4 mm) HF compression driver
Maximum output power* 7ype Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance Maximum input level -20 kΩ unbalanced, 40 kΩ balanced +21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls Rotary push-encoder	Limiter	Independent HF, LF, peak and rms
Maximum output power* 7ype Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance Maximum input level -20 kΩ unbalanced, 40 kΩ balanced +21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls Rotary push-encoder		
Type Class-D Protection Short circuit, open circuit, thermal Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls Rotary push-encoder	Amplifier	
Short circuit, open circuit, thermal	Maximum output power*	2,500 W
Connectors Input A / B 2 x combo jack/XLR Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Туре	Class-D
Input A / B Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level -21 dBu 2 x XLR Linked to input XLR, balanced Output A / B XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Controls	Protection	Short circuit, open circuit, thermal
Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Connectors	
Sensitivity Line +4 dBu, mic -22 dBu, switchable Input impedance 20 kΩ unbalanced, 40 kΩ balanced Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Input A / B	2 x combo jack/XLR
Maximum input level +21 dBu Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Sensitivity	Line +4 dBu, mic -22 dBu, switchable
Output A / B 2 x XLR Linked to input Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Input impedance	20 kΩ unbalanced, 40 kΩ balanced
Mix output XLR, balanced Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Maximum input level	+21 dBu
Output impedance 100 Ω unbalanced, 200 Ω balanced Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls Rotary push-encoder	Output A / B	2 x XLR Linked to input
Ultranet input/link 2 x RJ45 Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Mix output	XLR, balanced
Mains Supply Neutrik powerCON input 20A and link 15A Controls DSP Rotary push-encoder	Output impedance	100 Ω unbalanced, 200 Ω balanced
Controls DSP Rotary push-encoder	Ultranet input/link	2 x RJ45
DSP Rotary push-encoder	Mains Supply	Neutrik powerCON input 20A and link 15A
DSP Rotary push-encoder		
	Controls	
Buttons for PROCESS, SETUP, EXIT, ENTER	DSP	Rotary push-encoder
		Buttons for PROCESS, SETUP, EXIT, ENTER

2 x gain controls (channels A and B)

2 x Line/Mic switch

User DSP Functions	
Factory EQ presets	Positioning, Sound mode, Sound modeling, FBQ
Display	LCD 128 x 32, blue backlit
Delay	0 - 300 ms
Equalisation	High and low shelving EQ
	2 x parametric EQ
Limiter	Zero attack input limiter
Presets	20 total presets, 19 user-definable
Crossover	High Pass L-R 24 dB/oct
Protection	Lock-out function for all settings

k
16 channels
< 0.9 ms
Shielded CAT5
max. 246 ft / 75 m recommended

Power consumption	150 W @ 1/8 max power
Voltage (fuses)	
USA / Canada	120 V~, 60 Hz (T 15 A H 250 V)
UK / Australia / Europe	220-240 V~, 50/60 Hz (T 10 A H 250 V)
Korea / China	220-240 V~, 50/60 Hz (T 10 A H 250 V)
Japan	100 V~, 50/60 Hz (T 15 A H 250 V)

526 x 324 x 316 mm(20.7 x 12.7 x 12.4")
17.2 kg (38 lbs)
Injection-moulded polypropylene enclosure
Black painted
Powder coated perforated steel
M10 x 3 points

Accessories

IQ10-WB Steel wall bracket

 $[\]hbox{*independent of limiters and driver protection circuits}\\$



2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking





2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking







iQ10

2500 Watt 2 Way 10" Powered Loudspeaker with KLARK TEKNIK DSP Technology, Speaker Modelling and ULTRANET Networking





For service, support or more information contact the TURBOSOUND location nearest you:

Europe MUSIC Tribe Brands UK Ltd. Tel: +44156 273 2290 Email: CARECrea@music-group.com CAREEnte@music-group.com

CARELife@music-group.com

USA/Canada MUSIC Tribe Commercial NV Inc. Tel: +1 702 800 8290 Email: CARECrea@music-group.com CAREEnte@music-group.com

CARELife@music-group.com

Japan MUSIC Tribe Services JP K.K. Tel: +81 3 6231 0453 Email: CARECrea@music-group.com CAREEnte@music-group.com CARELife@music-group.com

