

ATEM 4 M/E Advanced Panel 40



This massive model is big enough to perfectly match the features on the ATEM Constellation switcher! It features 4 M/E rows with 40 input buttons per row and 4 independent system control LCDs for each row. This massive panel includes 24 LCD's for custom labeling of every button on every row!

\$18,485


Connections

Ethernet

 $4\times10/100/1000$ BaseT with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

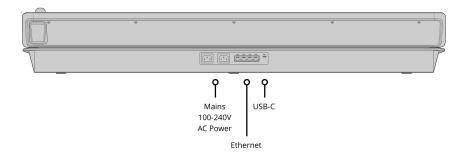

Product Specifics

Number of Mix Effects Rows	Crosspoint Label 10 rows 24 character LCD	DSK Transition Selectors Auto, Cut, Tie/Preview x 4
Direct Cross Points 40	Next Transition Selectors 4 x BKG, Key 1 - Key 4.	Preview Transition
Shifted Cross Points 80	On-Air indicator 20	Transition Rate Displays Via main menu

Menu Control

20 buttons x 4

Dedicated Macro Buttons

4 x 40

Transport Control Buttons

24

Destination Bus

4

Source Select Bus

4

Fader Bar

4

3 Axis Joystick

1

Numeric Keypad

1

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 10.14 Mojave, Mac 10.15 Catalina or later.



Windows 10, 64-bit.

Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

Redundant Power

Yes

Power Usage

250W

Physical Specifications



Environmental Specifications			
Operating Temperature 0° to 40° C (32° to 104° F)	Storage Temperature -20° to 60° C (-4° to 140° F)	Relative Humidity Up to 95%	
What's Included			
ATEM 4 M/E Advanced Panel 40			
Warranty			
12 Month Limited Manufacturer's Warı	ranty.		
All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy			
Blackmagic Design Authorized	d Reseller		