




For those who hear the difference

TRAM

MICROPHONE

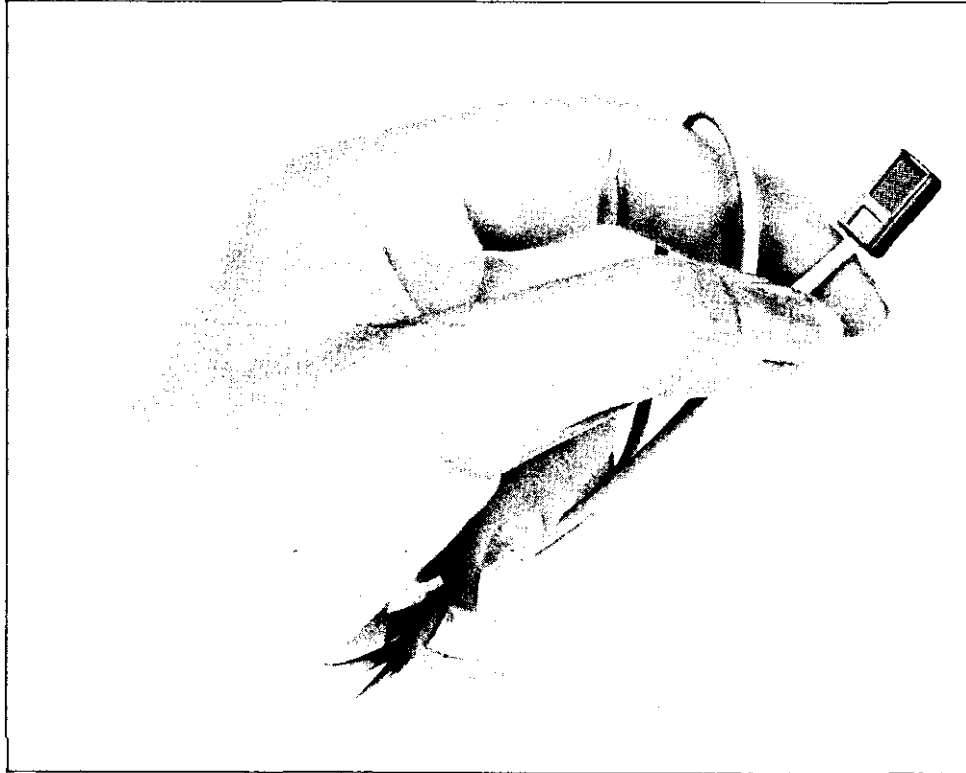

Actual Size

A **NEW** CONCEPT IN MINIATURIZATION

- Wide Frequency Response
- Tiny and Light
- Reliable and Rugged
- Minimum Rubbing Noise
- Easily Hidden
- Conveniently Attached
- Fits All Wireless Transmitters




THE BROADCAST SHOP

1020 N. North Branch St • Chicago, IL 60622
Phone (312) 867-1400 • Fax (312) 867-1140
www.TheBroadcastShop.com

TR-50

MICROPHONE

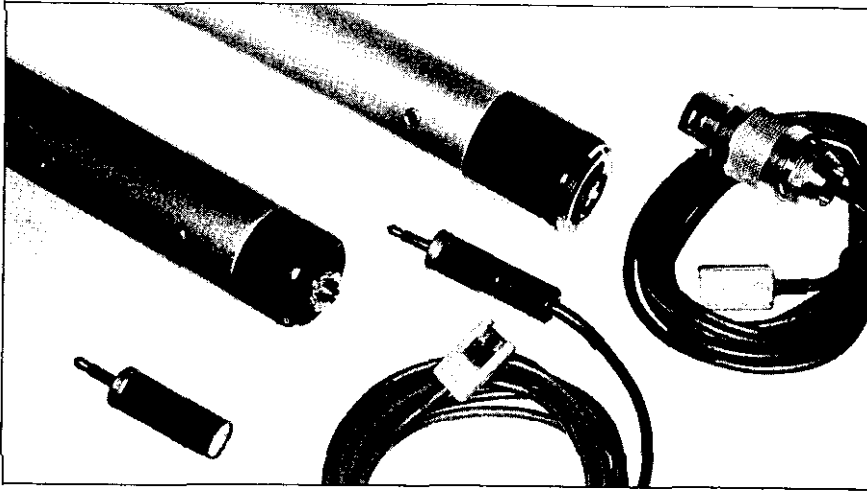

MICROPHONE MODELS:

- TR-50† Lavalier microphone for Wireless Transmitter
 - TR-79† Power Supply: Transformer for balanced output, XLR connector & battery
 - TR-50†-XL Combination of TR-50 & TR-79
 - TR-50†-PS Phantom Powered 12/48V or internal 1.3V battery
- * Color: B-Black, G-Gray, T-Tan, W-White

† Connector

Note: TR-50 & TR-79 are available with 4 & 8 pin Lemo, Micro, Mini-XLR and Preh connectors.


STANDARD ACCESSORIES:

(Included with microphone)

- Cable holder (CH)
- Clip On Holder (COH)
- Tie Bar (TB)
- Wind Screen (WS)
- Carrying case (CC)
- Tape Down (TD)
- Tie Tac (TT)
- Cable Reel (CR)(with PS only)

SPECIFICATIONS:

- SIZE: .196" x .300" X .540"
- TYPE: Omni-directional Electret Condenser
- FREQ. RESPONSE: 40 - 16,000 Hz
- NOISE LEVEL: 26dB equivalent SPL
- MAXIMUM SPL: 134dB
- OUTPUT LEVEL: -57dB
- NOMINAL IMPEDANCE: 3,500Ω
(TR-79 Power Supply - 250Ω)
- OPERATING VOLTAGE: 1.3v
- CURRENT DRAIN: 20-30 microamps
(TR-79: 80-100 microamps)
- BATTERY: RM-675, MS-76, etc.
- COLOR: Black, Gray, Tan (Flesh), White
- ISOLATED MIC ELEMENT: To reduce rubbing noise
- BIAS: Negative & Positive
- CABLE: Sturdy, Flexible-4½' long

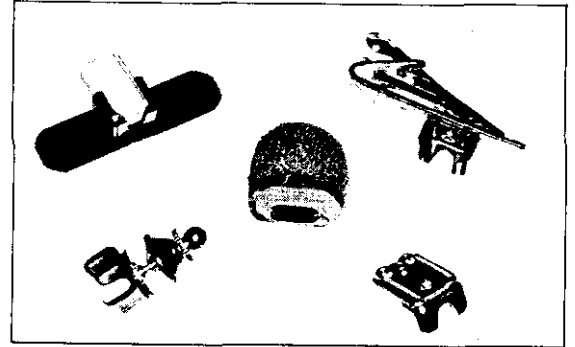


ADDITIONAL ACCESSORIES:

Boundary Layer*:

- Tape Down (BLTD)

Double Holder:

- Tie Bar (DTB)

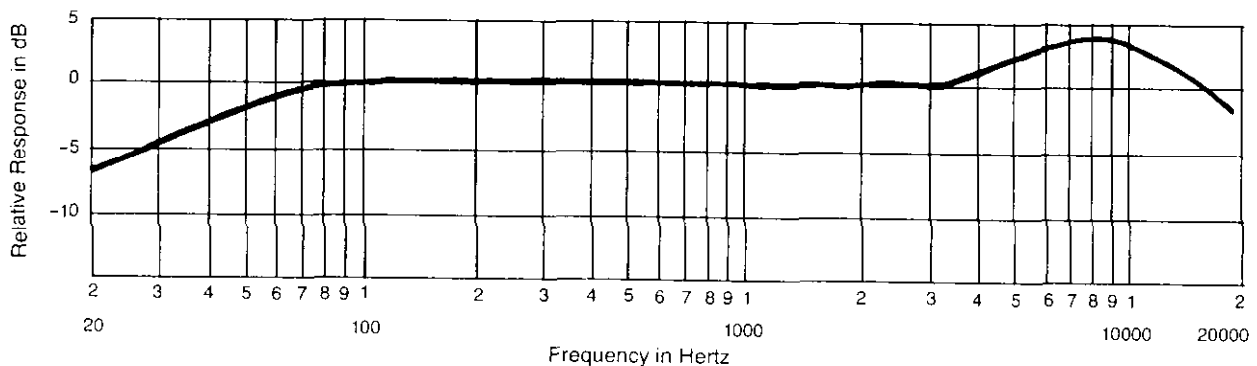

For those who hear the difference

THE BROADCAST SHOP

1020 N. North Branch St • Chicago, IL 60622
Phone (312) 867-1400 • Fax (312) 867-1140
www.TheBroadcastShop.com