


CQ-20B

Overview

The CQ-20B is an ultra-compact digital audio mixer designed to be operated via its built-in WiFi or through connection to a wired or wireless network.

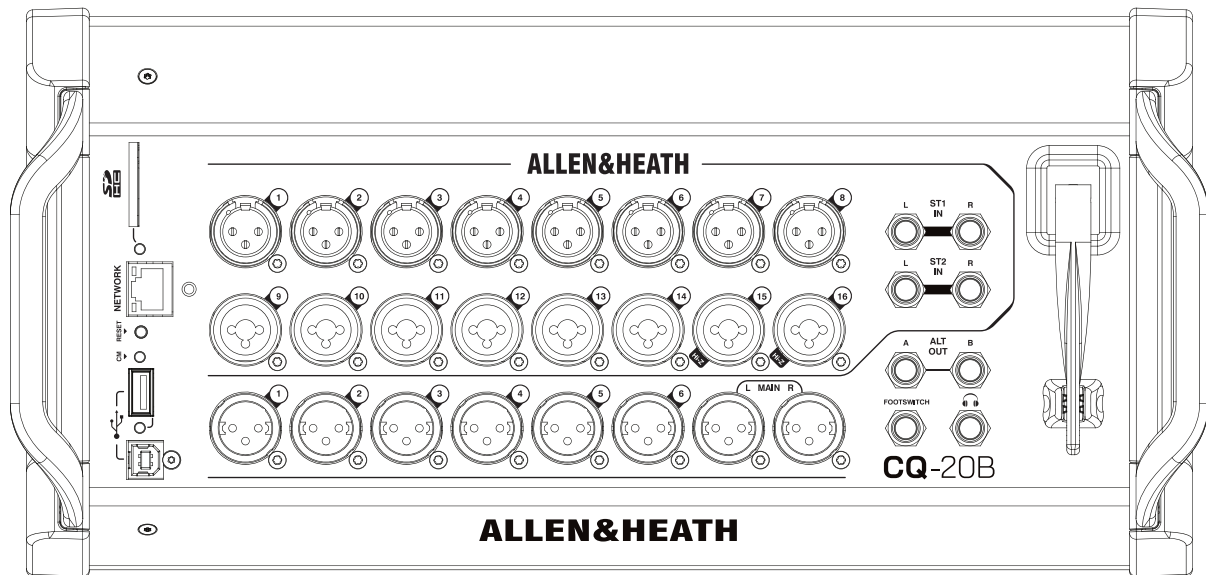

- 20x Inputs to Mix (16x Mono/Linkable, 4x Stereo)
- Stereo MainLR Output
- 6x Aux Outputs (Linkable up to 3x Stereo)
- 8x XLR Mic/Line Input Sockets
- 8x XLR/Jack 'Combi' Mic/Line Input Sockets (2 with Hi-Z option)
- 2x Stereo Line Input Sockets (each 2x TRS)
- 8x XLR Output Sockets
- 2x TRS Alt Out Sockets
- Stereo Headphone Output
- Dedicated Stereo USB Input to Mix
- Dedicated Stereo Bluetooth Input to Mix
- 96kHz Input/Output Processing
- 4x FX Assist Engines
- Built-In Dual Band WiFi (CQ as Host)
- RJ45 Network Socket (CQ as Client)
- USB-A For Stereo Audio Record/Playback and Data
- USB-B For Multichannel Audio Record/Playback (24x24)
- SD Card Slot for Multichannel Audio Record/Playback (24x24)
- Configurable Single/Dual Footswitch Connection
- Configurable Chromatic Channel Meter LED
- Rack Mountable (Optional Kit Available)
- IEC Mains Connection with Worldwide PSU
- Control Via Free Apps – Windows/MacOS/iOS/Android
- Width - 372mm/14.7"
- Depth - 154mm/6.1"
- Height - 134mm/5.3"
- Weight - 2.6kg/5.8lbs