

KRAMER ELECTRONICS, Ltd.

vww.kramerelectronics.com


TP-210A

1:10 Computer Graphics Video, Audio & RS-232 over Twisted Pair Transmitter & Distribution Amplifier





The TP-210A is a highperformance distribution amplifier for computer graphics video signals with resolutions up to UXGA, RS-232 signals and stereo or S/PDIF audio signals. The unit takes computer graphics video, stereo or S/PDIF audio and RS-232 signals and distributes each signal to two outputs plus ten twisted pair outputs.

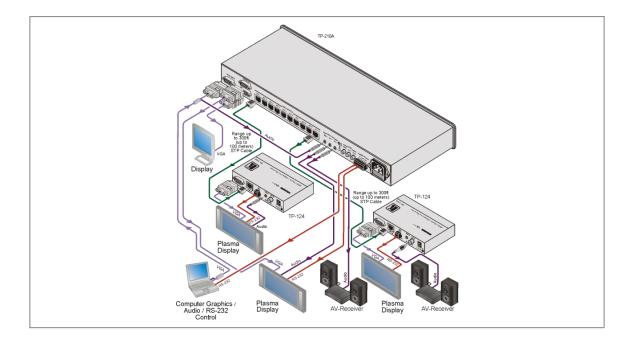



www.kramerelectronics.com

TP-210A

FEATURES

- HDTV Compatible.
- Max. Resolution UXGA & 1080p.
- Input Computer graphics video (15-pin HD), stereo audio (3.5mm), S/PDIF (RCA) & RS-232 (terminal block).
- Output 2 (each input format) and 10 twisted pair.
- Twisted Pair Connectors RJ-45.
- Audio Input Connectors 2 3.5mm (unbalanced) & 2 RCA (S/PDIF).
- RS-232 Input Connectors 4-pin terminal block (2 x Tx, Rx & Gnd).
- Sync Polarity Settings H & V switches.
- System Range (Twisted Pair) Up to 100m (320ft).
- Cable UTP (unshielded twisted pair) or STP (shielded twisted pair) such as CAT 5.
- Power ConnectTM System Only the TP-210A needs to be connected to a power source when the devices are within 50m (150ft) of each other.
- Worldwide Power Supply 100-240V AC.
- Standard 19 1U. Rack "ears" included.

TECHNICAL SPECIFICATIONS

1 UXGA video on a 15-pin HD connector, 1 unbalanced stereo audio on a 3.5mm mini jack, 1 S/PDIF on an RCA connector, 1 RS-232 with 1 RxD line on a terminal block connector.
10 twisted pairs on RJ-45 connectors, 2 UXGA on 15-pin HD connectors, 2 unbalanced stereo audio on 3.5mm mini jacks, 2 S/PDIF on RCA connectors, 2 RS-232 with 2 TxD lines on terminal block connectors.
Video: 1.6V; Audio: 2.3V.
12V DC 0.5A max via each RJ- 45 output (PINs 4, 5).
UXGA & 1080p.
20Hz to 20kHz @1dB (audio).
48kHz.
Audio: >75dB.
Audio: Analog/analog: 0dB; Analog/ S/PDIF: -12dBFS.
Audio: <0.02%.
100-240V AC, 50/60Hz, 46VA.
19" x 9.3" x 1U W, D, H, rack mountable.
3kg (6.6lbs) approx.
Power cord, rack "ears".