

# ACT-24TC Rechargeable Digital Bodypack Transmitter


## Key Features

- Miniature, sturdy plastic compact design.
- Mute button with Push & Talk function along with a LED status indicator. A connector for remote mute switch cable.
- Unique battery cover design provides easy access to operational controls and protects against accidental change of settings.
- Adjustable belt clip allows wearing transmitter in up or down position.
- Mini-XLR input with secure screw lock connector for lavalier / headworn mics and guitar.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.
- Selectable impedance for microphone or guitar / line inputs.



## Microphone Capsules

<b>MU-13</b>	Single-sided Earworn Microphone (beige)
<b>MU-23</b>	Omni-directional Headworn Microphone (beige, fixed connector)
<b>MU-23d</b>	Omni-directional Headworn Microphone (beige, detachable cont)
<b>MU-210</b>	Uni-directional Headworn Microphone (beige, fixed connector)
<b>MU-210d</b>	Uni-directional Headworn Microphone (beige, detachable cont.)
<b>MU-53L   MU-53LS</b>	Uni-directional Lavalier Microphone (black   beige)
<b>MU-55L   MU-55LS</b>	Omni-directional Lavalier Microphone (black   beige)
<b>MU-53HN   MU-53HNS</b>	Uni-directional Headworn Microphone (black   beige)
<b>MU-55HN   MU-55HNS</b>	Omni-directional Headworn Microphone (black   beige)

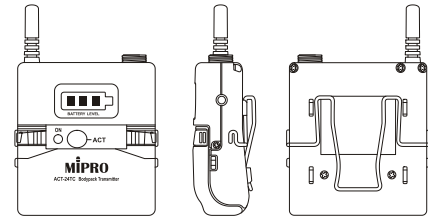

## Accessories

<b>ASP-30</b>	Neoprene Sports Pouch
<b>MJ-70</b>	Remote Mute Switch
<b>MU-40G</b>	Instrument Cable
<b>MP-20</b>	Battery Charger
<b>MP-8</b>	One-slot Charging Station
<b>MP-80</b>	3-in-1 Transmitter Charging Station
<b>TC-18</b>	Transmitter Shielding Storage Case

## Technical Specifications

Frequency Range	ISM 2.4 GHz
Channel Set-Up	ACT Sync
RF Output Power	2 mW / 10 mW switchable (country dependent)
Max. Audio Input	6.5 dBV
Mute Connector	Optional MJ-70 remote mute switch
Battery Meter	3 LEDs light in green to indicate battery status and turn to red to indicate low battery; after 2 hours power will automatically be shut down.
Battery Type	1 × ICR-18500 rechargeable lithium-ion battery
Current Consumption	Approx. 138 mA
Operating Time	A 25-minute fast charge provides up to 1 hour operation. 4-hour full charge gives 12 hours of operation (depending on the battery quality).
Dimensions (W × H × D)	63 × 70 × 25 mm   2.5 × 2.8 × 1 "
Net Weight	Approx. 66 g   2.3 oz



## MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw