

ACT-24HC Rechargeable Handheld Transmitter

Key Features

- Specific outline and color with ergonomic design in MIPRO's distinctive aesthetic style.
- Interchangeable capsule module with MIPRO produced premium condenser or dynamic options for easy and fast changeovers. The unique multi-layered metal grille instead of sponge foam protects the capsule against impact, rolling and pop noise, ensuring clarity of sound. The upper grille can be detached easily for cleaning and hygiene practices. It may accept other brands' interchangeable microphone capsule modules as well.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.
- The default gain setting is 0 dB = microphone capsule input sensitivity. High dynamic range for singing aloud without distortion.
- The rechargeable transmitter can be either charged by directly placing it in the MP-80 charger or removing the 18500 lithium-ion battery for charging. Bright LEDs indicate battery status.



Microphone Capsules


MU-39	Dynamic Capsule
MU-59	Professional Dynamic Capsule
MU-70	Condenser Capsule
MU-80	Condenser Capsule
MU-90	Condenser Capsule

Accessories

MS-20	Desktop Microphone Tripod
MD-20	Handheld Transmitter Microphone Holder
MP-20	Battery Charger
MP-8	One-slot Charging Station
MP-80	3-in-1 Transmitter Charging Station
SW-20	Foam Windscreens
TC-18	Transmitter Shielding Case

Technical Specifications

Frequency Range	ISM 2.4 GHz
Channel Set-Up	ACT Sync
RF Output Power	2 mW / 10 mW switchable (country dependent)
Capsules	Interchangeable Condenser or Dynamic capsules
Max. Audio Input	0 dB = microphone capsule sensitivity
Battery Meter	3 LEDs light in green to indicate battery status and turn to red to indicate low battery; after 2 hours power will automatically be shut down.
Battery Type	1 × ICR 18500 rechargeable lithium-ion battery
Current Consumption	Approx. 138 mA
Operating Time	A 25-minute fast charge provides up to 1 hour operation. 4-hour full charge gives 12 hours of operation (depending on the battery quality).
Dimensions (Ø × L)	51 × 248 mm 2.0 × 9.8 "
Net Weight	Approx. 255 g 9 oz

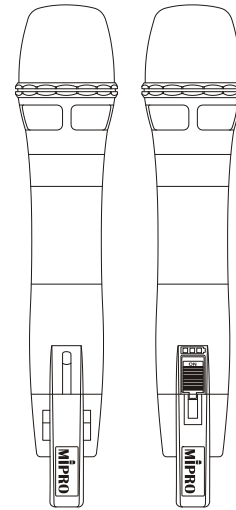

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw