# Multiple Battery Charger, Model CHG 3512

### **Description:**

This multi-unit, drop-in style charger will conveniently charge up to 12 Williams Sound Personal PA R35 or R38-8 receivers over the course of a 16 hour time span. It helps keep your products organized and saves cost on having to replace alkaline batteries.

### **CHG 3512 Multiple Battery Charger**

9.5" L x 7.4" W x 1.7" H (24.1 cm L x 18.8cm W x 4.3 cm H) Size: Weight: 1.2 lbs (.54 kg) - excluding power supply

Color: Black ABS 90 - 240 VAC input **Power Supply Input:** 

TFP 035 Switching AC adapter, 6 VDC - 5A output **Power Supply:** 

**Charging Rate:** 100 mA 16 Hour Charge:

Pulse/Maintain: 100 mA

16 hours nominal **Charging Time:** 

**Unit Capacity:** 12 Units


Indicators: Individual Charging Indicators: Red LEDs. LEDs blink when batteries are charged


1 year (cables and power supply warrantied for 90 days) Warranty:

Approvals: WEEE

Note: Charging specifications are based on Williams Sound Corp. rechargeable NiMH battery, BAT 026 (1400 mAh)

### **Multiple Battery Charger Features**

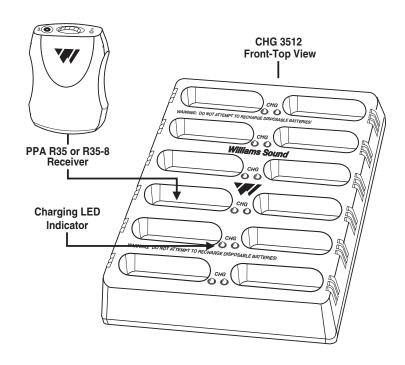



NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

## Multiple Battery Charger, Model CHG 3512

### **Bid Specs:**

The CHG 3512 shall be a 12 unit drop-in battery charger and shall charge a maximum of 24 AA size NiMH batteries while they are installed into the Williams Sound Corp. PPA R35 or PPA R35-8 style 3V receivers.

The charger shall be microprocessor controlled and enclosed in ABS plastic measuring  $9.5'' \text{ L} \times 7.4'' \text{ W} \times 1.7'' \text{ H}$  (24.1cm L x 18.8cm W x 4.3cm H). The unit shall weigh 1.2 lbs (2.64 Kg) without power supply, 2.9lbs (6.4 Kg) shipping weight.

The charger shall be a timed charger at 16 hours, and will provide a maintain charge once the timer has completed its charging cycle. Each bay on the charger shall have a red LED indicating charging status. The LEDs shall be on constantly on during charging and will blink indicating when batteries are fully charged.

The charger CHG 3512 shall be powered by an external switching power supply (90-240 VAC input; 5 VDC, 4.5A output) via a CD barrel connector.

The charger shall be the Williams Sound Corp. model CHG 3512.



## Multiple Battery Charger, Model CHG 3512

### **Contact:**

### **United States and Mexico**

Williams Sound Corp. 10321 W. 70th Street Eden Prairie, MN 55344

Ph: 800-328-6190 / 952-943-2252 / FAX: 952-943-2174

Web: www.williamssound.com Email: info@williamssound.com

#### Canada

Thorvin Electronics 2861 Sherwood Heights Dr. Units 36-37 Oakville, ON L6J-7K1 Canada

Ph: 800-323-6634 / 905-829-3040 / FAX: 905-829-4196

Web: www.thorvinelectronics.com

#### **South America**

DPTech SIA Trecho 3/4 Lote 335 2°. Andar 71200-030 Brasília, DF BRAZIL

Ph: (5561) 361-1384 Fax: (5561) 361-0948 Web: www.dptech.com.br Email: ws@dptech.com.br

### **Europe and Asia**

Williams Sound Sales Office

Email: doreenarmstrong@hotmail.com

