



CRISP MAX

SPECIFICATIONS / TECHNICAL DATA REV A

DYNAMIC EFFECTS:

Snow Adjustment: 0-100%
Fan Speed Adjustment: 50% or 100%
Snow Height Output: 26.25ft / 10m
Snow Distance Output: 39.3ft / 12m
Auto-Cleaning Feature

CONTROL:

2 Card Inputs for optional cards
RDM (Remote Device Management)
Control Protocol: DMX512
DMX Modes: 3 (1, 3 & 5 Channel)
On-Board Timing Control
5 Factory Presets
4-pin Wired Remote Input
Touch Screen Display
Manual Trigger via Touch Display

CONNECTIONS:

Data Connector: 5-pin XLR In / Out for DMX connections, 4-pin XLR for optional wired remote.
Locking Power Connector

CONSTRUCTION / PHYSICAL / PERFORMANCE

Dimensions: (LxWxH) 21.3 x 21.1 x 24.5in / 540 x 535 x 623.5mm
Weight: 77.17lbs / 35kg
Fluid Tank Capacity: 20L
Fluid Consumption: 16.9 fl. oz/min (500ml/min)

COMPATIBLE FLUID

Atmosity Premium Snow Fluid
Models: APS-2L, APS-4L, APS-20L

ELECTRICAL:

Power Consumption: 1250w
Input Voltage: 120V, 230V, 240V, 50 & 60Hz
Breaker Size: 15A (120V Version)
Breaker Size: 9A (230V Version)

CERTIFICATIONS / QUALIFICATIONS / THERMAL

IP Rating: IP20, dry location
Maximum Temperature (Ambient): 104°F (40°C)
Exterior Surface Temperature: 122°F (50°C)
CE / cETLus

WHAT'S INCLUDED:

Flight Case
14AWG Locking Power Cable
Snow Canon
10-Meter Long Hose

OPTIONAL ACCESSORIES:

MagFLY Card
MagAPP Card
MagRF Card
PSCM Hose-10M (PSC100)
PM-DMX1




MAGMATIC



CRISP MAX

SPECIFICATIONS / TECHNICAL DATA
REV A

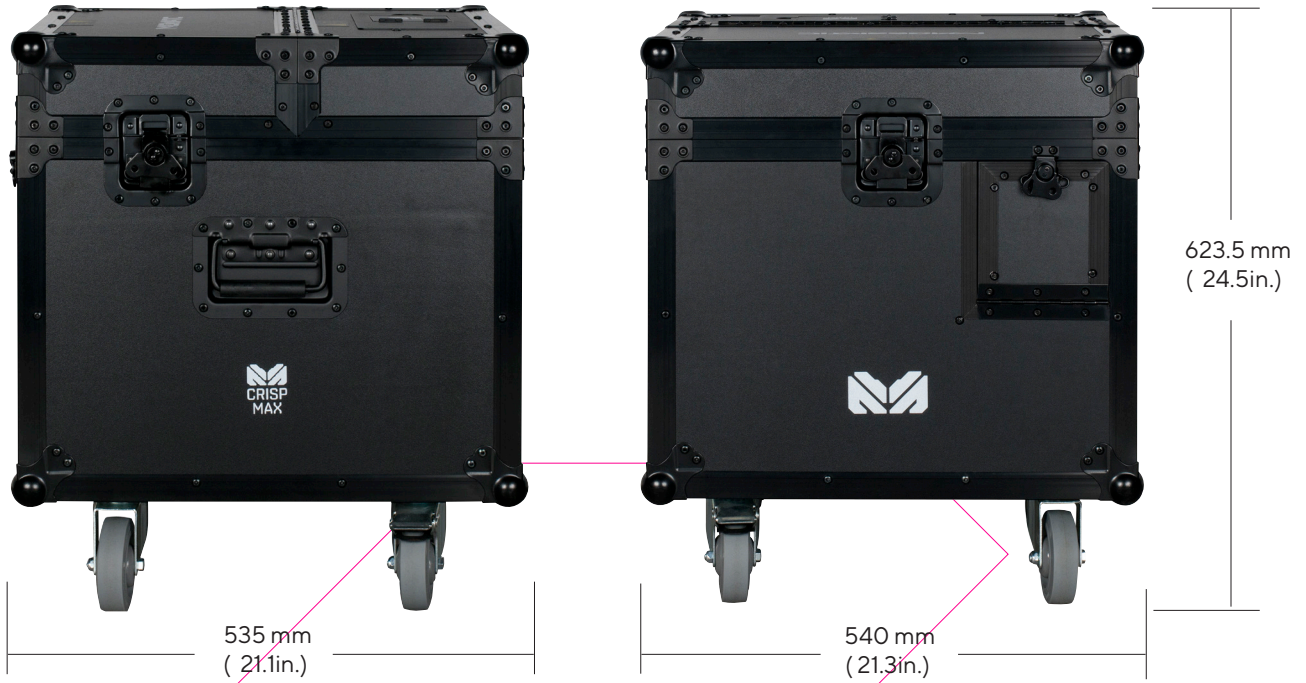

MAGMATIC