

MR-16 JR 12V - EUROSTAR™ SERIES

- Only for Use in Approved Halogen Fixtures
- Titanium Oxide Coated Reflector
- Axial Filament
- Low Voltage - 12 Volts


- Consistent Color
- Integrated UV Protection
- Precisely Focused Light Cone
- Up to 60 Degree Beam
- Available with Front Glass Cover (/FG)

- Cool Beam Effect



Watts	Ushio Ordering Code	Ushio Lamp Code	Dimension	Filament	Beam		Color Temp K	Avg Life h	Burn Position	Case Qty
			MOL (A)	Type	Angle	Max CP cd				
EUROSTAR™ 12V, 2-Pin Base – GU5.3										
10	1001107	JR12V-10W/NFL21	1.77	C-8	21°	600	2800	1200	Univ	50
10	1001108	JR12V-10W/NFL21/FG	1.78	C-8	21°	600	2800	1200	Univ	50
10	1003154	JR12V-10W/FL32	1.77	C-8	32°	400	2800	1200	Univ	50
20	1000366	ESX, JR12V-20W/SP12	1.77	C-8	12°	3500	2950	5000	Univ	50
20	1000370	ESX/FG, JR12V-20W/SP12/FG	1.78	C-8	12°	3500	2950	5000	Univ	50
20	1000028	BBF, JR12V-20W/NFL24	1.77	C-8	24°	1200	2950	5000	Univ	50
20	1000037	BBF/FG, JR12V-20W/NFL24/FG	1.78	C-8	24°	1200	2950	5000	Univ	50
20	1000000	BAB, JR12V-20W/FL36	1.77	C-8	36°	600	2950	5000	Univ	20
20	1000014	BAB/FG, JR12V-20W/FL36/FG	1.78	C-8	36°	600	2950	5000	Univ	50
20	1000001	BAB/60, JR12V-20W/WFL60	1.77	C-8	60°	270	2950	5000	Univ	50
20	1000004	BAB/60/FG, JR12V-20W/WFL60/FG	1.78	C-8	60°	270	2950	5000	Univ	50
35	1000548	FMT/FRB, JR12V-35W/SP12	1.77	C-8	12°	6000	2950	5000	Univ	50
35	1000551	FMT/FG, JR12V-35W/SP12/FG	1.78	C-8	12°	6000	2950	5000	Univ	50
35	1000552	FMV/FRA, JR12V-35W/NFL24	1.77	C-8	24°	2300	2950	5000	Univ	50
35	1000559	FMV/FG, JR12V-35W/NFL24/FG	1.78	C-8	24°	2300	2950	5000	Univ	50
35	1000564	FMW, JR12V-35W/FL36	1.77	C-8	36°	1300	2950	5000	Univ	50
35	1000573	FMW/FG, JR12V-35W/FL36/FG	1.78	C-8	36°	1300	2950	5000	Univ	50
35	1000565	FMW/60, JR12V-35W/WFL60	1.77	C-8	60°	510	2950	5000	Univ	50
35	1000566	FMW/60/FG, JR12V-35W/WFL60/FG	1.78	C-8	60°	510	2950	5000	Univ	50
50	1000416	EXT, JR12V-50W/SP12	1.77	C-8	12°	11000	3000	5000	Univ	50
50	1000419	EXT/FG, JR12V-50W/SP12/FG	1.78	C-8	12°	11000	3000	5000	Univ	50
50	1000424	EXZ, JR12V-50W/NFL24	1.77	C-8	24°	3600	3000	5000	Univ	50
50	1000430	EXZ/FG, JR12V-50W/NFL24/FG	1.78	C-8	24°	3600	3000	5000	Univ	50
50	1000398	EXN, JR12V-50W/FL36	1.77	C-8	36°	2000	3000	5000	Univ	20
50	1000405	EXN/FG, JR12V-50W/FL36/FG	1.78	C-8	36°	2000	3000	5000	Univ	50
50	1000589	FNV, JR12V-50W/WFL60	1.77	C-8	60°	850	3000	5000	Univ	50
50	1000592	FNV/FG, JR12V-50W/WFL60/FG	1.78	C-8	60°	850	3000	5000	Univ	50
75	1000451	EYF, JR12V-75W/SP12	1.77	C-8	12°	13000	3000	5000	Univ	50
75	1000452	EYF/FG, JR12V-75W/SP12/FG	1.78	C-8	12°	13000	3000	5000	Univ	50
75	1000454	EYJ/EZZ, JR12V-75W/NFL24	1.77	C-8	24°	4800	3000	5000	Univ	50
75	1000455	EYJ/EZZ/FG, JR12V-75W/NFL24/FG	1.78	C-8	24°	4800	3000	5000	Univ	50
75	1000444	EYC, JR12V-75W/FL36	1.77	C-8	36°	2700	3000	5000	Univ	50
75	1000447	EYC/FG, JR12V-75W/FL36/FG	1.78	C-8	36°	2700	3000	5000	Univ	50
75	1000445	EYC/60, JR12V-75W/WFL60	1.77	C-8	60°	1220	3000	5000	Univ	50
75	1000446	EYC/60/FG, JR12V-75W/WFL60/FG	1.78	C-8	60°	1220	3000	5000	Univ	50

All dimensions shown in inches unless otherwise noted.

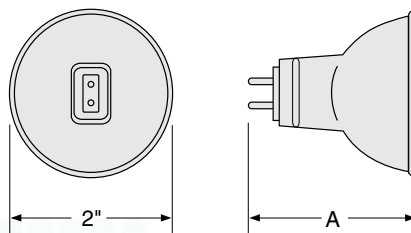

GU5.3

