

ND86



Electro-Voice

- Excellent acoustic control in even the largest of venues: present, smooth and detailed sound
- Large diaphragm dynamic capsule creates a rich and detailed frequency response
- Shock-mounted capsule minimizes handling noise
- Humbucking coil guards against line hum
- Memraflex grille resists denting



The Electro-Voice ND86 is a robust, high-performance dynamic supercardioid vocal microphone.

Designed for excellent acoustic control in even the largest of venues, the ND86 capsule is precisely tuned to deliver present, smooth and detailed sound, as well as superior isolation from sound on the stage.

The ND86 dynamic capsule contains a large Mylar diaphragm which delivers a rich and detailed frequency response by combining its large surface area for tonal balance with its low-mass high-velocity material for exceptionally fast transient response.

The ND86 features an innovative capsule shock-mount system consisting of a 4-point suspension around the circumference of the capsule combined with a tuned pneumatic pump at the capsule base, offering superior handling noise reduction to eliminate mechanical vibrations and noise in the mix.

The ND86 capsule uses a humbucking coil that attenuates AC hum and electromagnetic interference. ND dynamic mics can be used with confidence near speaker cabinets and EMF generating equipment racks.


The ND86 Memraflex grille is made of a durable tight-mesh grille wire that withstands extraordinarily-rough treatment. Your microphone remains protected and looking good gig-after-gig, year-after-year.

For additional protection, the ND86 capsule contains a hydrophobic cloth membrane which prevents moisture and debris from reaching the diaphragm.


Technical specifications

| | |
|--------------------------------------------|------------------------------------------------------------------------|
| Element Type: | Dynamic neodymium magnet structure |
| Frequency Response, Close: | 30 Hz – 17 kHz |
| Frequency Response, Far: | 70 Hz – 17 kHz |
| Polar Pattern: | Supercardioid |
| Sensitivity, Open Circuit Voltage @ 1 kHz: | 2.4 mV/Pascal |
| Maximum SPL: | >140 dB |
| Polarity: | Pin 2 positive, reference to pin 3 with positive pressure on diaphragm |
| Impedance: | 350 ohms balanced (low-z) |
| Microphone Connector: | 3-pin, XLR-type |
| Finish: | Black polyurethane paint |
| Material: | Zinc die cast handle, Memraflex grille screen |
| Dimensions, Length: | 7.2 in (182.5 mm) |
| Diameter: | 2.0 in (50.5 mm) |
| Shank: | 0.96 in (24.3 mm) |
| Net Weight: | 11.5 oz (326 g) |
| Shipping Weight: | 21.2 oz (601 g) |
| Accessories Included: | (1) Gig bag, (1) stand clip, and (1) Euro thread adapter |


Frequency Response:

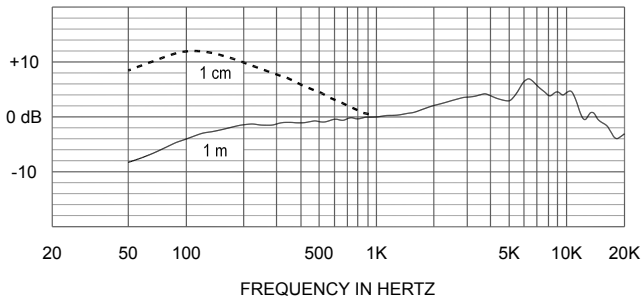

Dimensions:

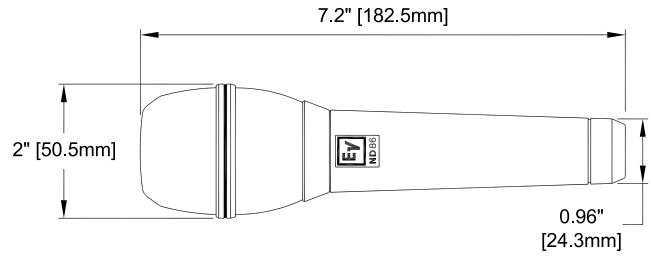

Polar Response:

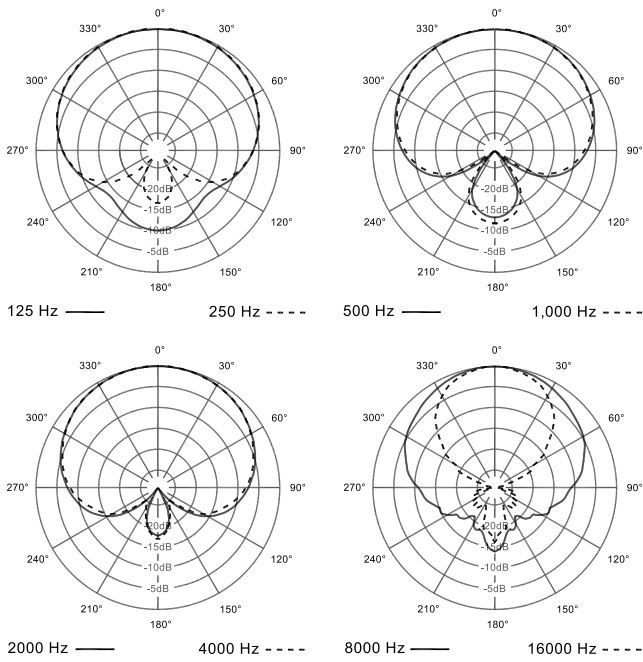

Parts included

| Qty. | Item |
|------|-----------------------------------------------------|
| 1 | Microphone |
| 1 | Gig bag |
| 1 | Stand clip |
| 1 | Euro thread adapter |
| 1 | Engineering data sheet |
| 1 | Warranty and Product Documentation Information card |

Ordering information

ND86
Dynamic supercardioid vocal microphone, black
Order number **ND86**

NDVOCCLIP
Replacement stand adapter, black
Order number **NDVOCCLIP**

ND86GRILLE
Replacement end grille, black
Order number **ND86GRILLE**

NDVOCRING
Replacement transition ring between grille sections, silver
Order number **NDVOCRING**

Accessories

379-1
Foam windscreen/pop filter, black
Order number **379-1**

Represented by:

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337
USA

www.electrovoice.com